



UNIVERSITÀ DI PARMA

ARCHIVIO DELLA RICERCA

University of Parma Research Repository

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Articles description

This is the peer reviewed version of the following article:

Original

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Articles description / Mio, A.; Fermeglia, M.; Favi, C.. - In: JOURNAL OF CLEANER PRODUCTION. - ISSN 0959-6526. - 370:(2022), p. 133476.133476. [10.1016/j.jclepro.2022.133476]

Availability:

This version is available at: 11381/2928471 since: 2024-10-08T06:51:09Z

Publisher:

Elsevier Ltd

Published

DOI:10.1016/j.jclepro.2022.133476

Terms of use:

Anyone can freely access the full text of works made available as "Open Access". Works made available

Publisher copyright

note finali coverpage

(Article begins on next page)

Journal of Cleaner Production

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Bibliometric analysis and characteristics of the studies

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Articles description

--Manuscript Draft--

Manuscript Number:	JCLEPRO-D-21-23898R2
Article Type:	Review article
Keywords:	LCA, Life Cycle Assessment, Life Cycle Analysis, Naval, Ship, Maritime
Corresponding Author:	ANDREA MIO, Ph.D. University of Trieste: Universita degli Studi di Trieste Trieste, TS ITALY
First Author:	ANDREA MIO, Ph.D.
Order of Authors:	ANDREA MIO, Ph.D. Maurizio Fermeglia, Ph.D. Claudio Favi, Ph.D.
Manuscript Region of Origin:	ITALY
Abstract:	<p>Most of the actual industrial research efforts are aimed at reducing environmental burdens associated with human activities in the context of sustainable development. This trend has become increasingly prevalent in the naval transportation sector shown by a growing number of scientific publications dealing with life cycle assessments of maritime-related activities. However, the life cycle assessment framework provides practitioners with a variety of alternatives for conducting the analyses, giving room for defining key factors, such as functional units, system boundaries, and impact assessment methods, among others. This lack of standardization resulted in a wide range of assumptions and findings that are seldom comparable. The goal of this review is providing a systematic literature analysis, focusing on the characteristics of life cycle assessments dealing with the environmental impacts of various maritime vessel categories. In the first part, a qualitative analysis of the available scientific literature has been performed, providing a bibliometric analysis and a general overview of the characteristics of the studies (i.e. , life cycle impact assessment methodologies, background data, and software tools used). The outcomes of the bibliometric analysis are then summarized and discussed to understand current practices and future trends in this field, providing the basis for the normalization phase of the results. The second section of the paper offers advice for naval practitioners on how to perform results normalization to produce comparable analyses. Two approaches for normalization have been proposed in the frame of this study: an “horizontal” one, which is based on vessel features and allows a comparison among different vessel typologies, and a “vertical” one that enables to fairly compare vessels of the same category to one another. In addition, each section reports the outcomes of greenhouse gas-related impact categories, which have been subjected to the proposed normalization procedure, along with the order of magnitude of the results for each life cycle phase. The overall work provides an overview of LCA impact results as well as a collection of procedures and recommendations for future life cycle assessments based on specific vessel types, in terms of functional unit selection, system boundary definition, impact assessment approach, presentation of the outcomes, and normalization basis.</p>
Suggested Reviewers:	Maja Percic University of Zagreb: Sveuciliste u Zagrebu maja.percic@fsb.hr Eduardo Blanco-Davis, PhD Reader, Liverpool Polytechnic: Liverpool John Moores University E.E.BlancoDavis@ljmu.ac.uk Dominique Millet, PhD Full Professor, Université de Toulon: Universite de Toulon

dominique.millet@univ-tln.fr

Filippo Cucinotta, PhD
Associate Professor, University of Messina: Universita degli Studi di Messina
filippo.cucinotta@unime.it

Editor's comment:

It is recommended that Part I be removed from the title since there is still no guarantee that a subsequent Part II will be published. It is recommended that the authors just focus on the main heading or scope of this work.

Authors: we would like to highlight that the idea of splitting the paper into two parts (Part I and II) was done following the editor's comments provided in the first round of the review process. In particular: "Please be reminded that review article submissions should have a maximum length of 12,000 words. Kindly keep this in mind as you conduct your revisions."

The manuscript was too long in the original version due to the variety of topics discussed (bibliometric analysis and normalization of results) and the high number of papers investigated. Therefore, the authors decided to split the original paper into two parts dealing with the specific topic, fixing the issue related to the paper length. However, both parts have already been subjected to the review process and we think they cannot be published on their own, since they require reciprocal information. Thus, the authors are wondering (and asking to the editor) what is the journal policy in this case:

- 1. Split the manuscript into two parts to keep consistency with the rules provided within the guide for authors and the comment of the Editor, or*
- 2. Keep only one manuscript, knowing that the overall length exceeds the maximum number of words reported within the guide for authors.*

The authors are open to accomplishing both options with a preference for the first one since it keeps the literature review in line with the guide for authors, clearer and easily readable for the audience.

Reviewer #1:

The authors substantially addressed my requests and the reorganization has improved the structure of the article.

I disagree with the authors when they say that their aim is to provide a method to normalize the FU and the LCA results on the basis of different vessels typologies and not to compare the results among the different type of vessels. Because if they want to indicate a method to normalize the FU, they cannot fail to check whether normalization parameters are found that can override the rigid ship-type schemes. For this reason I suggested to check the influence of the ratio between the weight of the structure by the weight of the plants of the ship which could be a parameter related to the relationship between emissions during construction and during use, perhaps regardless of the type of ship. Moreover, "normalization" is already presented in the title of this work.

Authors: thank you for stressing this point. The authors followed the suggestion provided by the reviewer and proposed a normalization based on vessel features (i.e., LWT and engine power). As a result, two approaches for normalization are proposed in the manuscript: (i) a vertical normalization carried out by following the vessel function and allowing a comparison of vessels belonging to the same category, and (ii) a horizontal normalization carried out by following the vessel features and allowing a comparison of different vessels regardless their functions.

In this regard, the methodological section has been revised to include this new method of result normalization (section 2), and the overall analysis of the outcomes was revised including also the horizontal normalization approach (a new section was added – section 3.2). Furthermore, the discussion section has been expanded to include considerations on this new horizontal normalization (section 4).

The authors hope that the additional work done is in line with the suggestion provided by the reviewer and that the paper improved in terms of quality and readability.

Reviewer #2:

The manuscript has significantly improved. However, the reviewer finds that manuscript's grammar should be further improved so that enable readers to understand the content smoothly.

Authors: we have revised deeply the manuscript to enhance readability

1. Table 2: the last row - is it necessary to have this row when the FU indicated as NA?

Authors: thank you for having highlighted this issue. The NA was replaced with the following sentence: "FUs not provided or not clearly defined within the paper"

2. Check for the numbering order for Tables. It seems there are 2 Table 2 labeling.

Authors: figure captions and labels (numbering) were revised to keep them consistent with the new structure of the manuscript. Please bear in mind that the original version of the manuscript was split into two parts (Part I and Part II) to fulfil the requirements of the guide for authors regarding the paper length.

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Bibliometric analysis and characteristics of the studies

Andrea Mio^{a*}, Maurizio Fermeglia^a, Claudio Favi^b

a. MolBNL@UniTS, Department of Engineering and Architecture, University of Trieste, Italy

b. Department of Engineering and Architecture, University of Parma, Italy

* Corresponding author e-mail: amio@units.it

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Articles description

Andrea Mio^{a*}, Maurizio Fermeglia^a, Claudio Favi^b

a. MolBNL@UniTS, Department of Engineering and Architecture, University of Trieste, Italy

b. Department of Engineering and Architecture, University of Parma, Italy

* Corresponding author e-mail: amio@units.it

Highlights

- i. Bibliometric analysis highlights the general trends in LCA in the maritime sector
- ii. LCA outcomes of maritime vessels are normalized to gain comparable results
- iii. Normalization criteria are suggested based on the function and scope of the vessels
- iv. Efficiency Ratio assesses the operational performance regardless of the vessel category

Wordcount: 8167

A critical review and normalization of the life cycle assessment outcomes in the naval sector. ~~Part 1 –~~ Bibliometric analysis and characteristics of the studies

Andrea Mio^{a*}, Maurizio Fermeglia^a, Claudio Favi^b

a. MolBNL@UniTS, Department of Engineering and Architecture, University of Trieste, Italy

b. Department of Engineering and Architecture, University of Parma, Italy

* Corresponding author e-mail:

Abstract

Most of the actual industrial research efforts are aimed at reducing environmental burdens associated with human activities in the context of sustainable development. This trend has become increasingly prevalent in the naval transportation sector ~~also, with~~ ~~shown by~~ a growing number of scientific publications dealing with life cycle assessments of maritime-related activities. However, the ~~overall~~ life cycle assessment framework provides practitioners with a variety of alternatives for conducting the analyses, giving room for defining key factors, such as functional units, system boundaries, and impact assessment methods, among others. This lack of standardization resulted in a wide range of assumptions and findings that are seldom comparable. ~~The goal of this research work is to provide a systematic literature review focusing on the application of life cycle engineering in the environmental analysis of several types of maritime vessels.~~ The goal of this review is providing a systematic literature analysis, focusing on the characteristics of life cycle assessments dealing with the environmental impacts of various maritime vessel categories. In the first part, a qualitative analysis of the available scientific literature has been performed, providing a bibliometric analysis and a general overview of the characteristics of the studies (*i.e.*, life cycle impact assessment methodologies, background data, and software tools used). The outcomes of the bibliometric analysis are then summarized and discussed to understand current practices and future trends in this field, providing the basis for the normalization phase of the results. ~~The second part of the review provides recommendation for naval practitioners on how to carry out the ISO standard's normalization stage in order to produce comparable analysis, covering all relevant information for a certain vessel category.~~ The second section of the paper offers advice for naval practitioners on how to perform results normalization to produce comparable analyses. Two approaches for normalization have been proposed in the frame of this study: an “horizontal” one, which is based on vessel features and allows a comparison among different vessel typologies, and a “vertical” one that enables to fairly compare vessels of the same category to one another. In addition, each section reports the outcomes of greenhouse gas-related impact categories, which have been subjected to the proposed normalization procedure, along with the order of magnitude of the results for each life cycle phase. ~~The overall work provides an overview of vessel specific impact results as well as a collection of procedures and recommendations for future life cycle assessments based on specific vessel types, in terms of functional unit selection, system boundary definition, impact assessment approach, presentation of the outcomes, and normalization basis.~~ The overall work provides an overview of LCA impact results as well as a collection of procedures and recommendations for future life cycle assessments based on specific vessel types, in terms

of functional unit selection, system boundary definition, impact assessment approach, presentation of the outcomes, and normalization basis.

Keywords: LCA, Life Cycle Assessment, Life Cycle Analysis, Naval, Ship, Maritime

Glossary

ADE: Abiotic Depletion of Elements

ADF: Abiotic Depletion of Fossil fuels

AP: Acidification Potential

~~BAU: Business As Usual~~

~~CAD: Computer Aided Design~~

CC: Climate Change

CCS: Carbon Capture and Storage

CED: Cumulative Energy Demand

CFC: ChloroFluoroCarbon

CPC: Central Product Classification

CTUe: Comparative Toxic Units ecotoxicity

CTUh: Comparative Toxic Units for human

DCB: DiChloroBenzene

~~DE: Diesel Electrical~~

~~DM: Diesel Mechanical~~

~~DWT: DeadWeight Tonnage~~

ECA: Emission Control Area

EI99: EcoIndicator 99

~~EIO: Economic Input-Output~~

~~EEZ: Exclusive Economic Zone~~

EoL: End of Life

EP: Eutrophication Potential

~~EPD: Environmental Product Declaration~~

ETP: EcoToxicity Potential

~~EU: Europe/European~~

FD: Fossil Depletion

FETP: Freshwater EcoToxicity Potential

FEU: Freshwater EUtrophication

~~FRC: Fouling Release Coating~~

FU: Functional Unit

GHG: GreenHouse Gas

GMAW: Gas Metal Arc Welding

GT: Gross Tonnage

GTAW: Gas Tungsten Arc Welding

GWP: Global Warming Potential

HCE: Human Carcinogenic Effects

HCFC: HydroChloroFluoroCarbon

HFO: Heavy Fuel Oil

HNCE: Human Non-Carcinogenic Effects

HTP: Human Toxicity Potential

ILCD: International reference Life Cycle Data system

IMO: International Maritime Organization

IPCC: Intergovernmental Panel on Climate Change

IR: Ionising Radiation

ISO: International Organization for Standardization

LCA: Life Cycle Assessment

LCC: Life Cycle Costing

LCI: Life Cycle Inventory

LCIA: Life Cycle Impact Assessment

LNG: Liquefied Natural Gas

LOP: Land Occupation Potential

LSHFO: Low-Sulfur Heavy Fuel Oil

LU: Land Use

LWT: Lightship Weight

MD: Metal Depletion

MDO: Marine Diesel Oil

METP: Marine EcoToxicity Potential

MEU: Marine EUtrophication

MSETP: Marine Sediment EcoToxicity Potential

N.A.: Not Applicable – Not Available

NMVOC: Non-Methane Volatile Organic Compounds

NLT: Natural Land Transformation

ODP: Ozone Depletion Potential

PM: Particulate Matter

PMFP: Particulate Matter Formation Potential

POCP: Photochemical Ozone Creation Potential

POFP: Photochemical Oxidant Formation Potential

RDE: Resource Depletion of Elements

RDF: Resource Depletion of Fossil fuels

RE: Respiratory Effect

~~RoPax: Roll-on/roll-off Passenger~~

RoRo: Roll-on/roll-off

S: Smog

SLCA: Social Life Cycle Assessments

~~SMAW: Shielded Metal Arc Welding~~

~~SMR: Single Mixed Refrigerant~~

TETP: Terrestrial EcoToxicity Potential

TEU: Terrestrial EUtrophication

TRACI: Tool for Reduction and Assessment of Chemicals and other environmental Impacts

TTW: Tank-To-Wake

ULCC: Ultra Large Crude Carrier

VLCC: Very Large Crude Carrier

VOC: Volatile Organic Compound

WTT: Well-To-Tank

WTW: Well-To-Wake

WUD: Water Use Depletion

Locations

CAN: Canada

CHN: China

DEU: Germany

DNK: Denmark

ESP: Spain

EU: Europe/European

FRA: France

GBR: Great Britain

GRC: Greece

ITA: Italy

KOR: South Korea

LTU: Lithuania

NLD: Netherlands

NOW: Norway

QAT: Qatar

PER: Perù

PRT: Portugal

SLO: Slovenia

SWE: Sweden

TUN: Tunisia

TUR: Turkey

USA: United States of America

VNM: Vietnam

1. Introduction

The maritime transportation industry is undergoing a transformation to become more economically, socially, and ecologically sustainable. It is common knowledge that marine vessels' activities have significant environmental consequences such as greenhouse gas emissions, air pollution, underwater noise, oil contamination, and so on. etc. Despite the fact that the International Maritime Organization (IMO) is responsible for the safety and security of global shipping, it has acknowledged that maritime transportation has unintended environmental consequences. Therefore, the IMO adopted different measures to protect the marine environment from the ecological impacts of shipping activities, e.g., preventing emissions of GreenHouse Gas (GHG) (IMO - Marine Environment Protection Committee, 2020) or NOx (IMO - International Maritime Organization, 2019). The International Maritime Organization (IMO) is responsible for the safety and security of global shipping, promoting several measures to protect the marine environment from the ecological impacts of shipping activities, e.g., preventing emissions of GreenHouse Gas (GHG) (IMO - Marine Environment Protection Committee, 2020) or NOx (IMO - International Maritime Organization, 2019). As a result, a life cycle approach is being lately used by maritime companies, practitioners, and academics to explore environmental risks associated with commodities traveling by sea. As a result, in recent years, researchers, practitioners, and maritime firms have all employed a life cycle approach to examine the environmental risks related to goods transported by sea. Indeed, it is critical to examine both the shipping and shipbuilding characteristics in order to achieve a greener marine sector. The life cycle assessment (LCA) approach is consistent with the key concepts of green shipbuilding, which are represented by the so-called "triple R's": (i) reducing materials, energy consumption, and pollutant emissions during ship manufacturing, (ii) recycling almost all ship maintenance components, and (iii) reusing the majority of ship's materials during its disposal. The primary goal of green manufacturing is to reduce material waste while also picking new and more sustainable materials that can bring benefits, such as nano-engineered thermoplastic polymers (Mio et al., 2021) or greener processing methods and improved life cycle assessment outcomes.

Since the growing interest of the international community about in environmental pollution and the rise of the LCA methodology in the last two decades, several works have been developed with the goal of understanding, characterizing, and implementing corrective actions to offshore operations performed by marine vessels. LCA is a technique for assessing the possible environmental implications and resources required throughout a product's life cycle, beginning with raw material acquisition and continuing with manufacturing and consumption phases to waste disposal (The International Standards Organisation, 2021a). The results of life cycle analyses are reported in a variety of impact categories, with the goal of evaluating the whole range of ecological consequences associated with the life cycle of the product under investigation. The LCA framework entails four phases of implementation, which are briefly described underneath. The first is the "Goal and Scope," which requires practitioners to describe allows describing the study's goal, target readers, functional unit, system boundary, data source quality, and approach assumptions and limitations. The "Life Cycle Inventory" (LCI) study is the second step, in which practitioners are gathering the mass and energy balances of the product system under inquiry. The second phase, called "Life Cycle Inventory" (LCI), involves gathering the mass and energy balances of the product system under investigation (Rebitzer et al., 2004). The inventory data are then used in the "Life Cycle Impact Assessment" (LCIA) stage, which uses well-established emission factors to link them to particular environmental impacts. Following that, the inventory data are used in the "Life Cycle Impact Assessment" (LCIA) stage, which links them to specific environmental impacts using well-established emission factors. Finally, the "Interpretation" phase uses discretionary sensitivity and uncertainty analyses to interpret the data produced in the preceding previous phases (Pennington et al., 2004). In the maritime sector, LCA-based studies have been conducted for a variety of shipping operations, including passenger transportation (ferries), commodities and fuels transportation (tankers and cargo boats vessels), pleasure and recreational activities (yachts), and fishing, among others. LCA has grown in maturity and methodological robustness over time, resulting in an international

standardization of the overall procedure the development of an international standard (The International Standards Organisation, 2021b). However, the overarching framework for conducting an LCA study offers practitioners a wide range of options for how to undertake the analysis. However, the overarching framework for performing an LCA research provides practitioners with a variety of options for conducting the analysis. This lack of constraints in developing the LCA for the system of interest led to heterogeneous assumptions and results among the research available. As noticed in the current literature, the lack of restrictions in constructing the LCA for the system of interest resulted in varied assumptions and outcomes. The discrepancy stems mostly from the functional unit's definition, assumptions about the product's life duration, the differences in system boundaries involved, indicator selection, and reporting of the outcomes. The disparity is caused primarily by the functional unit's definition, assumptions about the product's life cycle, differences in system boundaries, environmental indicators selection, and outcomes reporting. Inconsistencies persist even for the same product, making it difficult to compare findings and identify patterns in the shipbuilding industry. For instance, before the ship is delivered, the shipbuilding process includes multiple operations (raw materials acquisition and refining, component fabrication, vessel assembly, sea trials, etc.), and the available studies do not always declare what is included or not. Some attempts at sectoral standardization have been made, although they have mostly focused on specific tasks, such as developing a holistic strategy (Fet et al., 2013), data retrieval and organization (Favi et al., 2019b), the development of a dedicated tool (Prinçaud et al., 2010) or the definition of new impact eco-financial indicators (Ytreberg et al., 2021). As a result, there is space for improvement in the use of the LCA tool in shipbuilding and vessel operations. As a result, there is room for improvement in the application of the LCA framework in shipbuilding and vessel operations.

Based on a scientific literature investigation of the works already published, this critical review aims to provide assistance to naval practitioners willing to perform an LCA in the naval sector. The objective of the first part is to present presenting a bibliometric analysis of the research works in the context of LCA for different types of maritime vessels different maritime vessel categories. The review outcomes provide a general overview of the main trends in this sector concerning LCIA methodologies, background data, and software tools that were adopted so far. in the analysed works. Outcomes are then summarised with the aim to provide a backbone specific benchmarks for the development of two normalization procedures. The second part (Mio et al., 2022) includes a set of recommendations for LCA methodological choices in order to promote the alignment of existing and future studies in this field of interest on a common ground. The results of greenhouse gas-related effect categories are then shown, together with the order of magnitude of the results for each life cycle phase, after they have been subjected to the proposed normalizing procedure. As a result, future studies will be able to determine some benchmark values to compare against.

2. Methodology for the selection of contributing assessments

The approach used to reach the review's goal is based on a systematic literature review based on a Scopus database search, which was conducted on June 29th, 2021. Scopus database was selected due to its comprehensive collection of journals belonging to the naval field. The search was restricted to English-language publications available in peer-reviewed journals. The keywords chosen to query the database can be seen in Figure 1.

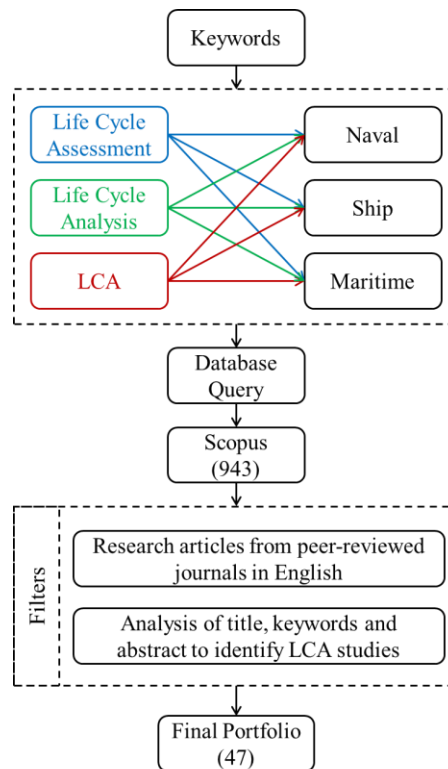


Figure 1: Decision procedure flowchart

To select the relevant articles, the search was conducted using the following keywords in combination with Boolean operators: (“Life Cycle Assessment” OR “Life Cycle Analysis” OR “LCA”) AND (“Naval” OR “Ship” OR “Maritime”). A total of 943 articles were found in Scopus. The results have been thoroughly refined using a series of filters, as presented hereafter:

- only documents from research and review articles from peer-reviewed journals in English were included. Duplicated documents, book chapters, and grey literature (*i.e.*, reports, dissertation, and theses) were excluded;
- conference proceedings published on special issues of peer-review journals were included;
- the articles not related with to the topic and scope of this review were ruled out through the analysis of titles, keywords, and abstracts.

As a result, only full articles and conference proceedings from peer-reviewed journals were examined, resulting in a total of 47 publications.

A further refinement based on the system boundary of the product system has been performed. A further refinement based on the boundaries of the product systems has been performed, discerning between two major trends: (i) system boundary comprehending at least one component of the vessel (*e.g.*, hull, power system, coating, naval systems, etc.); (ii) system boundary including exclusively the supply chain of fuels adopted in the naval sectors, *i.e.*, Well To Wake (WTW) approach. The former studies implemented a cradle-to-gate or cradle-to-grave perspective including the entire vessel or some of its components within the scope of the assessment system boundary, while the latter works disregarded any part of the vessel in favour of focusing on the fuel life cycle, considering its supply chain (Well To Tank – WTT) and its consumption during the operational phase of the vessel (Tank To Wake – TTW). Even though both product systems are topics of interest for the naval sector, they deal with a different perspective, preventing any comparison between the results of the two groups. Even though both product systems are of interest to the naval sector, they deal with different perspectives, making any comparison of the two groups' results unfeasible. As a result, a study of the literature available for each distinct scope appears to be more practical, with the goal of presenting an

overview of previous authors' benchmark values in each category. Therefore, a review of the available literature for each separate scope appears to be more practical, with the purpose of offering an overview of prior authors' benchmark values in each domain. Hence, this review focuses on the systems products whose system boundaries comprehend at least one component of the vessel under study, leaving the maritime fuels life cycle assessments for future analysis. Additionally, the assessments focused solely exclusively on Life Cycle Costing (LCC) or Social Life Cycle Assessment (SLCA) have been excluded, as they are outside the scope of this review.

The following sections deal with the qualitative analysis of the literature available, exhibiting the main features characterizing the LCA publications in the maritime field. The features examined in the papers' portfolio (47 articles) comprehend the number of publications documents per year, the authorship, the publication source, the geographic location (country) where the research was conducted, the number of citations per article, the LCIA methods and impact categories considered, the inventory database used, and the software tool for calculation.

Despite the authors do not claim this study to be free of limitations nor exhaustive, this review brings a useful contribution to the addressed literature body. To the best of the authors' knowledge, no studies investigating the features of LCA in the naval sector have been published yet. In the present research work, several contributions will be provided:

- a qualitative analysis of the main features of the scientific literature dealing with LCA in the naval sector;
- a quantitative indication of the environmental impact results (e.g., global warming potential) for each vessel type among available studies, as presented in the second part (Mio et al., 2022);
- some recommendations towards a standardization of the future life cycle assessments, in terms of the choice of functional unit, system boundaries, LCA approach, and presentation of the results.

3. Bibliometric analysis

3.1. Number of publications per year

Following the results obtained by the selection process of literature (final portfolio), it is interesting to see that the relevant literature covers a limited timeframe which starts from 2009. Following the outcomes of the literature selection process (final portfolio), it is noteworthy to remark that the relevant literature covers a limited timeframe beginning in 2009. Figure 2 reports the distribution of papers considering the publication years and the number of cumulative citations during this period.

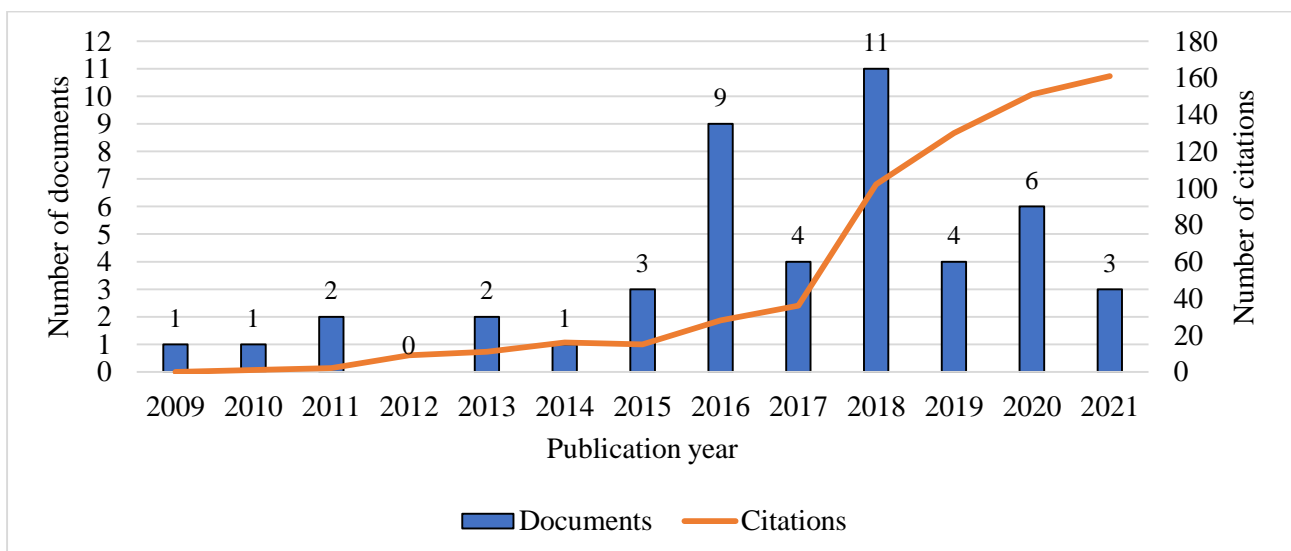


Figure 2: Overview of the number of documents and cumulative citations through the years

The overall trend increased in the last years and more than 80% of the retrieved papers were issued in the last six years. Although the graph shows a scattered distribution of papers, ranging from 0 to 11 for each year, the mean value for the overall period (2009-2021) is approx. 3.5 papers per year. Focusing on the earlier period (2009-2014) the mean value is slightly higher than 1 paper per year, while during last the six years the mean value rises to approx. 5.5 papers per year. The result of this analysis highlights that there is a growing interest in the development of LCA studies for marine vessels, which is confirmed by the increasing trend of citations in the last five years. This finding is in line with the industrial demands to develop more sustainable systems, capable of meeting new industry requirements and tackling the issue related to marine pollution and the emissions from this sector. Furthermore, the increasing use and acceptance of LCA approach contribute significantly to this goal.

3.2. Publication source

The current study considers 47 papers, published in 22 different scientific journals or peer-reviewed conference proceedings. The top 4 journals, which cover approx. 50% of the overall number of papers (24 papers out of 47), are characterized by having at least five articles each (Table 1). “Journal of Cleaner Production” is the journal with the highest number of papers, followed by “International Journal of Life Cycle Assessment”, “Ocean Engineering” and “Proceedings of the Institution of Mechanical Engineers Part M: Journal of Engineering for the Maritime Environment”. It is interesting to highlight the different topics covered by the above-mentioned journals. Indeed, papers published by the “International Journal of Life Cycle Assessment” are mostly related to fishery and LCA analysis of vessels belonging to fishing activities. On the other hand, works published in the other three journals belong to different types of vessels (*i.e.*, yacht, tugboat) and several vessel operations (*e.g.*, unconventional propulsion systems, alternative shipping fuels, use of scrubber systems, etc.).

Table 1: Most significant journals, with at least five papers (sorted according to the number of documents considered in the review)

Journals	Subject category	Papers	Number of citations
Journal of Cleaner Production	Business, Management and Accounting	8	138
	Environmental Science		
	Engineering		
	Energy		
Ocean Engineering	Engineering	6	92
	Environmental Science		
International Journal of Life Cycle Assessment	Environmental Science	5	102
Proceedings of the Institution of Mechanical Engineers Part M: Journal of Engineering for the Maritime Environment	Engineering	5	20
Others	Various	23	328

The most relevant subject areas of the four journals are summarized in Table 1. Except for “Proceedings of the Institution of Mechanical Engineers Part M: Journal of Engineering for the Maritime Environment”, which is Q2 for the Engineering topic, the rest of the journals are Q1 for all subject areas.

3.3. Authorship and country co-occurrence

The most productive authors are Zhou, P. (8 papers), Jeong, B. (6 papers), Wang, H. (5 papers), Favi, C. (5 papers), Germani, M. (5 papers), Campi, F. (4 papers), and Dong, D.T. (4 papers). The most active countries on LCA analysis of maritime vessels and systems are located in Europe and Asia, while American and African countries present only a few works on this topic. Among the EU countries, the most productive ones are Great Britain (13 papers), followed by Italy (8 papers), France (5 papers), and Sweden (3 papers). China (10 papers), Vietnam (5 papers), and Turkey (4 papers) are the most productive Asian countries, as shown in Figure 3.

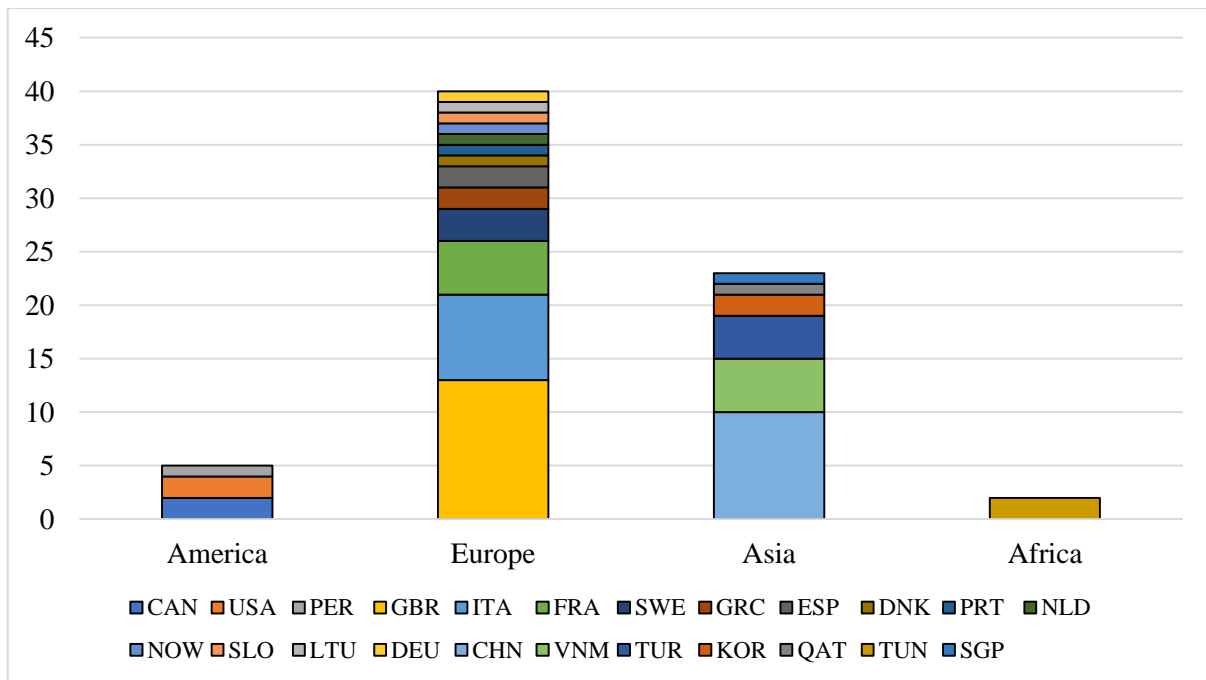


Figure 3: Number of publications per continent

Taking into consideration first authors only, researchers from EU European universities cover approx. 78% of the published articles on this topic, researchers from Asian universities cover approx. 14%, while researchers from American universities cover approx. 8%. It is worth to highlight that the quantity of cooperation among universities belonging to different countries is high and they account for approx. 32% (16 papers have been jointly written by two or more researchers from different countries and universities). The most active university on this topic is the University of Strathclyde (GBR) with 8 issued papers, followed by Parma University/Polytechnic University of Marche (ITA) and Vietnam Maritime University (VNM) with 5 issued papers, and Harbin Institute of Technology (CHN) with 4 issued papers. Figure 4 depicts the geographical distribution of the publications, with the true physical location of each country. The size of each nation is determined by the number of documents containing at least one affiliation inside the country, and they are coloured according to the continent to which they belong. The arrows represent documents with shared authorship between countries, and the thickness of the arrows increases as the number of shared publications increases.

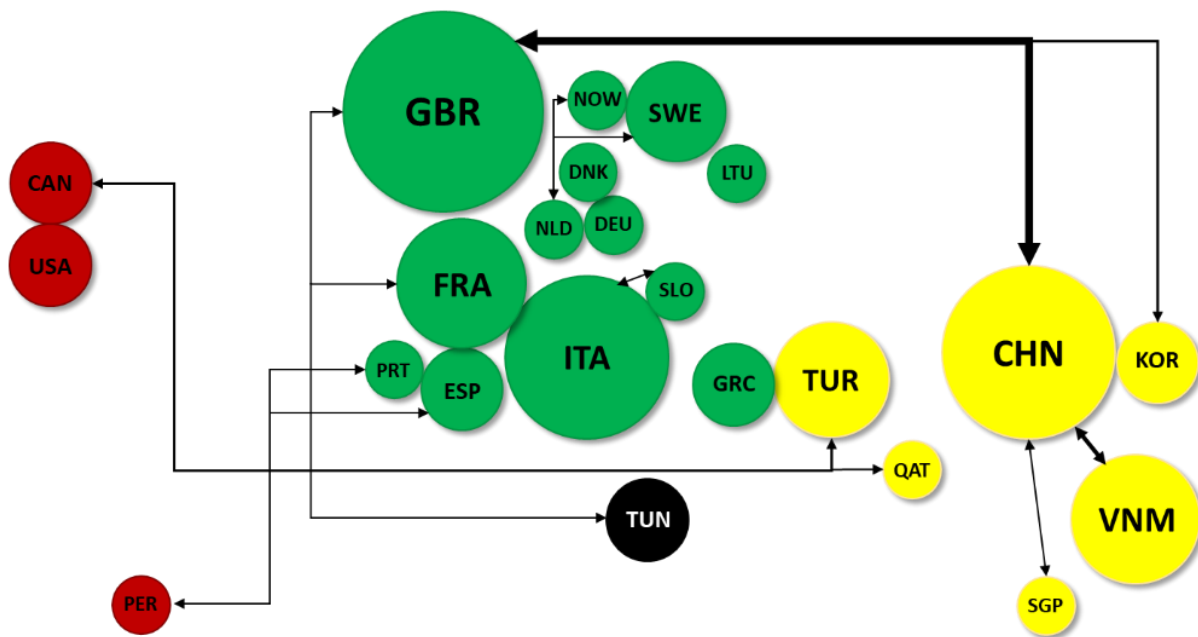


Figure 4: Geographical distribution of the issued papers

4. Main trends of papers Main publication trends

The first part of this literature review focuses on identifying the main features and publication trends towards a normalization process of life cycle analysis in the maritime sector. section 4.1 investigates the functional units, system boundaries, and allocation methods used in the analysed works. section 4.2 reports life cycle impact assessment methods and indicators used in this field, while section 4.3 analysed background data e software tools adopted to carry out the analyses.

4.1. Functional unit, system boundaries, and allocation method

Several assumptions were introduced to conduct LCA analyses in a complex sector such as the naval one, starting from the definition of the functional units (FUs), as reported in Table 2. The available literature notably lacks a comprehensive analysis that categorizes and prioritizes the variety of functional units and systems used in the maritime industry for performing LCA studies. There is a notable lack of a comprehensive study that categorizes and prioritizes the various functional units and systems used in the maritime industry for LCA assessments. This review addresses this need, offering a starting point for future LCA research in the maritime industry to the scientific community. Beyond the type of vessel and its peculiarities, the functional units mostly differ in terms of the number of years service lifetime and the lifecycle phases considered in the analysis. For instance, the vessel lifetime may take a wide range of values due to different manufacturing materials or different vessel applications, and consequently, the LCA outcomes may be hardly comparable. The life cycle phases considered in the analyses face a similar problem analogous issue. Despite the fact that the majority of research papers strove to conduct cradle-to-grave studies, some life cycle phases are frequently disregarded, such as maintenance or end-of-life (EoL). Despite the fact that the bulk of study publications attempted to conduct cradle-to-grave investigations, some life cycle phases, such as maintenance or end-of-life (EoL), are usually overlooked. Detailed information about the system boundaries considered in the works analysed in this review is reported in Supplementary Materials.

Table 1: Main FUs defined per vessel category.

Vessel type	CPC code	Number of publications	FUs

Cruise and Ferry Boats	49311	8	<p>2400 passengers transported a day (Tchertchian et al., 2016, 2013)</p> <p>The vessel construction, maintenance, operation and disposal over the lifetime of 25 years (Blanco-Davis and Zhou, 2014)</p> <p>Transportation of 60 passengers and 20 bikes for 30 years (Pommier et al., 2016)</p> <p>The construction, operation, maintenance, and scrapping of alternative propulsion systems for ferry in a life span of 30 years (Jeong et al., 2018; Wang et al., 2018a)*</p> <p>The construction, operation, maintenance, and scrapping of a short route ferry in a life span of 30 years (Wang et al., 2018b)</p> <p>One ship during its lifetime (Cucinotta et al., 2021)</p>
Tankers	49312	6	<p>One average year of ship transport service (Kjær et al., 2015)</p> <p>The construction, maintenance, operation and the disposal of a tanker for a period of 25 years (Chatzinikolaou and Ventikos, 2015)</p> <p>moving one tonne of crude oil over a 1 km distance (mg-CO₂/t-km) (Nian and Yuan, 2017)</p> <p>The transportation of 1 tonne of cargo for 1 km (Bicer and Dincer, 2018a, 2018b)**</p> <p>One oil tanker with a deadweight of 74,296 tons for the transportation of crude oil by sea over its 25-year lifetime (Quang et al., 2021)</p>
LNG carriers	49313	1	<p>a system capable of re-liquefying 4000 kg of the BOG (Boil Off Gas) in an hour for 25 years (Park et al., 2020)</p>
Cargo vessel	49314	12	<p>The transport of one ton of bulk cargo over a distance of one km by sea during T years of service (20 or 30 years) (Gratsos et al., 2010)</p> <p>The operation of the hybrid power system implemented on-board a RoRo cargo ship travelling on regular routes within ECAs over a lifespan of 30 years (Ling-Chin and Roskilly, 2016a, 2016b)</p> <p>Operation of the power system for the same RoRo cargo ship travelling on regular routes over 30 years (Ling-Chin and Roskilly, 2016c)</p> <p>Two hulls used for a duration of 26 years each (Gilbert et al., 2017)</p> <p>The transportation of 1 tonne of cargo for 1 km (Bicer and Dincer, 2018a, 2018b)**</p> <p>The manufacturing, 30-year operation and disposal of a ship engine coupled with a CCS system on a bulk carrier (Wang and Zhou, 2018)</p> <p>The construction of one Panamax bulk carrier for the transportation of coal from Australia to Japan over a 25-year life cycle (Tuan and Wei, 2019)</p> <p>The transport of one ton of bulk cargo over one km by sea over a 20-year service life (Dong and Cai, 2020, 2019; Quang et al., 2020)</p>
Fishing vessels	49315	5	<p>1 ton of landed round fish/landed seafood in one year of operation (Abdou et al., 2020, 2018; González-García et al., 2015; Ramos et al., 2011; Ziegler et al., 2018)</p>
Tug boats	49316	2	<p>Engine construction, operation, maintenance and scrapping (Jeong et al., 2018)*</p> <p>Tugboat ship performance during its service (Wang et al., 2020)</p>
Pleasure and	494	6	<p>One high-speed patrol craft (TTRB-2000) hull during 25 years of service (Burman et al., 2014)</p>

sporting boats			<p>The hull manufacturing and usage for 25 years of service (Cucinotta et al., 2017)</p> <p>The maritime operational activities and the transportation of persons and goods by sea for a period of 20 years (Favi et al., 2017)</p> <p>The construction and the disposal of a vessel for the transportation of persons and goods and/or operational activities by sea for a period of T years (Favi et al., 2018a, 2018b)</p> <p>the complete life cycle of 11 m long GRP boat hull; produced in Izmir (Turkey), excluding operation stage of the boat and recycled in a Turkish state-of-the-art recycling system (Önal and Neşer, 2018)</p>
Others		10	FUs not provided or not clearly defined within the paper

* The publication of Jeong et al. (2018) developed two case studies (a ferry and a tugboat)

** The publications of Bicer and Dincer (2018b, 2018a) deal with several vessel categories (tankers and cargo vessels)

Another key element of articles in this field is the authors' choice of the allocation system model, which should match the declared assessment's goal. As a result of the use of various allocation models among the published assessments, the outcomes are inconsistent and incomparable, particularly when dealing with the EoL phase. Most of the works analysed in this review did not clearly report the allocation model adopted to conduct the LCA analysis. Following a thorough examination of each publication, the "Allocation Cut-off" model was the most widely used strategy, with only a few adopting the "Allocation at the Point of Substitution" model and none using the "Consequential" one. Based on this first analysis, as a general guideline, the selection of a coherent allocation model is essential to standardize the results of LCA analyses in the naval field, with the "Allocation Cut-off" as the most suitable model for this product category. **The definition of the FU needs to be lifetime-independent, which means that the use phase partial outcomes should be presented on a year basis in order to enable future comparisons. The FU definition should be lifetime-independent, which implies that the operational phase outcomes shall be reported on a yearly basis to allow for future comparisons.** Furthermore, the adoption of a cradle-to-grave approach is required to normalize the results across the many investigations, **with the outcomes presented divided into the major phases of the vessel lifecycle with the outcomes organized to highlight the impacts of the various stages of the vessel's lifecycle (i.e., materials & manufacturing, operation, maintenance, and EoL).**

The vessel category plays an important role in achieving a proper and normalized FU, too. Additionally, the vessel category is crucial for establishing a suitable and consistent FU. When the function and performance of the product system under consideration are both consistent, the normalizing **process procedure** stands to reason. **Looking at the lifecycle assessments analysed for this study, it appears clear that most of the FUs were defined with the goal of analysing a specific vessel or at least a certain vessel with alternative systems (see Table 2).** It is evident from the lifecycle assessments examined for this study that the majority of the FUs were defined with the intention of analysing a specific vessel, or at the very least a certain vessel with alternative systems (see **Error! Reference source not found.**). **This is the case, for instance, with cruise and ferry boats, tankers, and tugboats. A normalization basis has already been proposed for several vessel categories (e.g., cargo vessel and fishing vessel, since the scope of these vessels is more clearly recognizable** For cargo, ferry and fishing vessels, whose range of operations is more readily discernible, a normalization basis has already been proposed (i.e., one ton of bulk cargo over one km transported by sea for the cargo vessel, one passenger over one km transported by sea for the ferry or 1 ton of landed fish for the fishing vessel). **However,** Based on the function provided by each vessel category, a normalization basis for the life cycle assessment outcomes is essential to enable a clear comparison among alternative solutions and to identify the main cause of criticalities. This topic has been discussed in detail in **the second part of this review** (Mio et al., 2022).

4.2. Life Cycle Impact Assessment methods

The adoption of well-established impact categories allows for the quantification of the environmental impacts caused by shipping activities. Numerous impact categories are available in the literature, each one related to specific environmental compartments and harms. Every substance known to have a harmful effect on the compartment addressed by a specific impact category is assigned a characterisation factor that is proportional to the substance's impact. The impact categories have been embedded into several LCIA methods, which encompass various sets of impact categories, which include a variety of impacts, in order to present a comprehensive picture. The most used methods in the naval sector are CML-IA (de Bruijn et al., 2002), EcoIndicator 99 (EI99) (Goedkoop and Spriensma, 2000), ILCD (EC-JRC, 2012), Impact 2002+ (Jolliet et al., 2003), ReCiPe (Huijbregts et al., 2017) both midpoint and endpoint, and TRACI (Bare, 2011). Figure 5 shows the occurrence of each method along with direct emissions, *i.e.*, where the authors did not use any LCIA methods, but rather present the direct emissions of the life cycle.

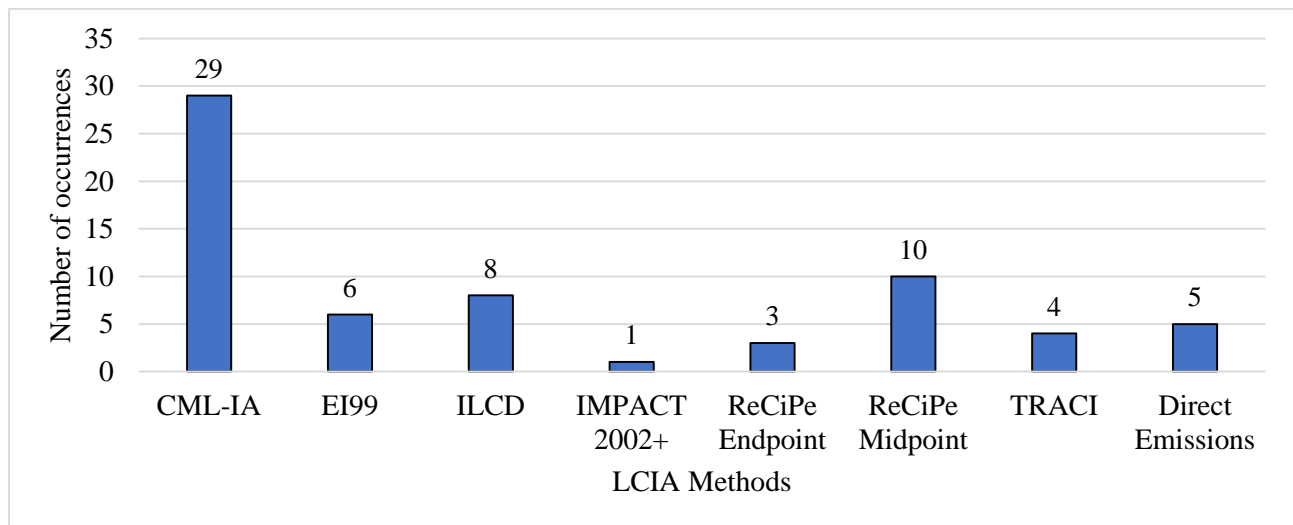


Figure 5: LCIA methods used in the papers under investigation

Even if some of the impact categories are similar or address the same issue, each LCIA method has its own list of impact categories. The ones included within the LCIA methods considered are briefly presented:

- Abiotic (or Resource) Depletion of Elements (ADE, RDE) and Metal Depletion (MD): reflects a decline in the amount of non-renewable and renewable abiotic resources accessible for human use. It is quantified by CML-IA (CML-ADE) and ILCD (ILCD-ADE) using [kg Sb-eq], while ReCiPe (Re-MD) focuses on the depletion of metals only, using [kg Fe-eq].
- Abiotic (or Resource) Depletion of Fossil Fuels (ADF, RDF) and Fossil Depletion (FD): represents a decrease in the amount of fossil fuels available for human use. It is used by CML-IA (CML-ADF measured in MJ), ReCiPe (Re-FD in [kg oil-eq]) and ILCD (ILCD-RDF in [MJ]).
- Acidification Potential (AP): reflects the detrimental acidic consequences of the life cycle emissions on atmosphere, water or soil. It is comprehended within CML-IA (CML-AP) and ReCiPe (Re-AP), where is measured in [kg SO₂-eq], and within ILCD (IL-AP) and TRACI (TR-AP), where is expressed in [mol H⁺-eq].
- Climate Change (CC)/Global Warming Potential (GWP): represents the effects of greenhouse gas (GHG) emissions on heat absorption, leading in higher temperatures in the lower atmosphere and climate change, which is a severe danger to world ecosystems. It is commonly calculated based on the GWP over a 100-year time horizon (IPCC-GWP100) according to the UN Intergovernmental Panel on Climate Change (Stocker et al., 2013). It is expressed in [kgCO₂-eq] and calculated by CML-IA (CML-GWP), ILCD (ILCD-CC), ReCiPe (Re-CC) and TRACI (TR-GWP).

- Cumulative Energy Demand (CED): represents the amount of energy (*e.g.*, fossil fuels, electricity) required during the life cycle of the product and is expressed in MegaJoules [MJ].
- Ecotoxicity Potential (ETP): depicts hazardous chemicals' detrimental impact on various natural compartments, including marine (METP), freshwater (FETP) and terrestrial (TETP) ecosystems and marine sediments (MSETP). CML-IA and ReCiPe adopts USES-LCA method (Van Zelm et al., 2009), which defines the fate, exposure and effects of toxic emissions related to each substance involved in the life cycle. They express the indicators CML-METP, CML-MSEPT, CML-FETP, CML-TETP, Re-METP, Re-FETP, Re-TETP using [kg_{1,4-DCB}-eq], where DCB stands for dichlorobenzene. TR-ETP and ILCD-FETP adopt [CTU_e], instead.
- Eutrophication Potential (EP): shows the detrimental consequences of nitrogen and phosphorus discharge into the ecosystem, in terms of overstimulating algal and aquatic plant growth. It is accounted by CML-IA (CML-EP, measured using [kg PO₄-eq]); ReCiPe, that splits the contributions to freshwater (Re-FEU in [kg P-eq]) and marine (Re-MEU in [kg N-eq]) compartments; TRACI, which accounts for nitrogen only (TR-EU in [kg N-eq]); and ILCD, which shows three separate contributions towards freshwater (ILCD-FEU in [kg P-eq]), marine water (ILCD-MEU in [kg N-eq]) and land (ILCD-TEU in [kg N-eq]).
- Human Toxicity Potential (HTP): covers a pollutant's intrinsic toxicity as well as its dosage when it is discharged into water, air, or soil. It is measured in kilograms of 1,4-dichlorobenzene equivalents [kg_{1,4-DCB}-eq] for CML-IA (CML-HTP) and ReCiPe (Re-HTP), while ILCD and TRACI split the toxicity contribution between carcinogenic effects (ILCD-HCE in CTU_h and TR-HCE in [kg benzene-eq]) and non-carcinogenic effects (ILCD-HNCE in [CTU_h] and TR-HNCE in [kg toluene-eq]).
- Ionising Radiation (IR): is concerned with the harm to human health and ecosystems caused by radioactive emissions throughout a product. It is comprised within ReCiPe (Re-IR in [kBqU₂₃₅-eq]) and ILCD (ILCD-IR in [kg U₂₃₅-eq]).
- Land Occupation Potential (LOP) / Natural Land Transformation (NLT) / Land Use (LU): deals with the land area required during the life cycle of the product. CML-IA measures CML-LOP in [m²yr], ReCiPe (Re-NLT) in [m²], ILCD (ILCD-LU) in [points].
- Ozone Depletion Potential (ODP): indicates the potential for chlorinated and brominated substances to damage the stratospheric ozone layer, increasing the quantity of damaging UV radiation impacting the earth's surface. ODP is expressed in [kg CFC-11-eq] by CML-IA (CML-ODP), ReCiPe (Re-ODP), TRACI (TR-ODP) and ILCD (ILCD-ODP).
- Particulate Matter Formation Potential (PMFP) / Particulate Matter (PM) / Respiratory Effect (RE): particulate matter is a complex combination of minuscule particles. Acids (such as nitrates and sulphates), organic compounds, metals, and soil or dust particles are all possible components of particle pollution. Particle pollution is connected to plenty of health issues, including respiratory issues. It is measured in [PM₁₀-eq], *i.e.*, particles with a size of 10 µm, by ReCiPe (Re-PMFP), in [PM_{2.5}-eq], *i.e.*, particles with a size of 2.5 µm, by TRACI (TR-RE) and ILCD (ILCD-PM). ILCD also employs ILCD-RE, which is measured in [disease incidence].
- Photochemical Oxidant Formation Potential (POFP) / Photochemical Ozone Creation Potential (POCP) / Smog (S): highlights the detrimental effects of chemicals generated in the troposphere as a result of sunlight reacting with particular reactive substances derived from fossil fuel emissions. Photochemical oxidants are especially hazardous to human health and the environment. CML-IA expresses CML-POCP in [kg ethylene (C₂H₄)-eq], ReCiPe and ILCD make use of [kg NMVOC-eq], *i.e.*, Non-Methane Volatile Organic Compounds, for measuring Re-POFP and ILCD-POCP, respectively, and TRACI employs [g NO_x-eq] for TR-S.
- Water Use Depletion (WUD): represents the usage of water resources and it is expressed in [kg H₂O] by ILCD (ILCD-WUD).

The number of occurrences of each impact category among the documents under investigation is shown in Figure 6.

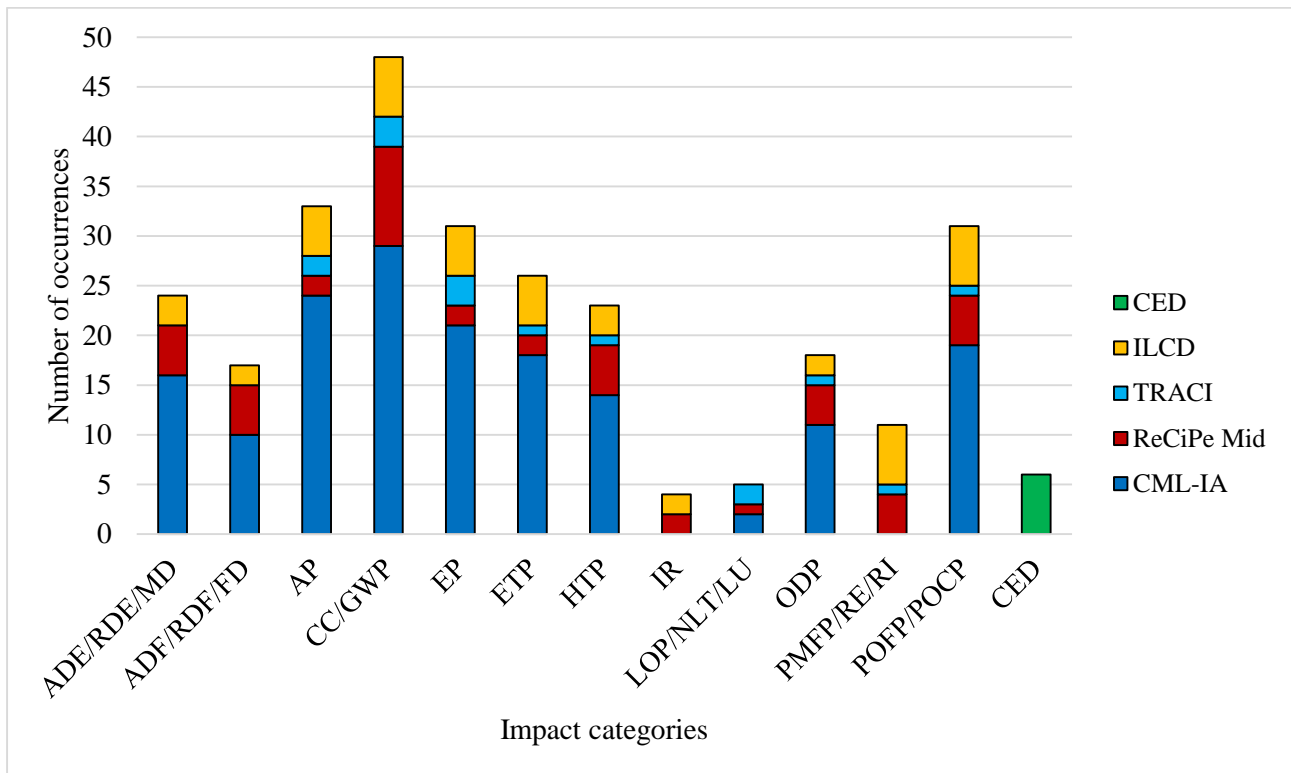


Figure 6: Number of occurrences of the impact categories used in the documents under study

As highlighted in Figure 6, and considering the complexity of the system (product and processes) under analysis, is quite challenging to identify a suitable set of indicators that are more representative for this field. As shown in Figure 6, identifying a suitable set of indicators that are more representative for this field is quite challenging, especially given the complexity of the system (product and processes) under analysis. The main LCIA methods used in this sector are not focused on a single-issue. In some cases, when single-issue LCIA methods were adopted (e.g., CED), they were not the only LCIA method used in the analysis. Indeed, other indicators from other LCIA methods were also employed to gain a wider overview of the environmental burdens. CML-IA and ReCiPe were the most adopted midpoint LCIA methods, even though in some cases, for the sake of brevity, only a few indicators were presented in the analysis, and among them, the most used were CC/GWP, AP, EP, POFP/POCP, ETP, HTP, and ADE/RDE/MD. The CC/GWP indicator was the most commonly used since the use phase was recognized as the most impactful activity within the lifecycle of the vessel, and the combustion of fossil fuels during the operational phase has a strong correlation with the CO₂ emissions and CC/GWP indicator. Nevertheless, researchers always mentioned the need of evaluating various indicators, which are equally important and necessary to have a clear overview of the product system under investigation. The selection of a specific LCIA method is critical for standardizing LCA outcomes depending on vessel categories, bearing in mind that some specific midpoint impact categories environmental impacts can be assessed with different LCIA methods and final results may be comparable even when the calculation has been performed using a different methodology. This is the case, for instance, of CC/GWP indicators.

4.3. Background data e software tools

The data required to generate the life cycle inventories of the product systems under study have been retrieved from various sources and can be classified as specific (or primary) data and background (or secondary) data. The former are data gathered from the manufacturing facilities (e.g., shipyards) where

product-specific procedures are carried out, or from other life cycle activities that may be traced back to the unique system under examination (e.g., peculiar operational profile, measured fuel consumption, maritime-specific operations, etc.). The latter are often generic data from widely available data sources (e.g., commercial or free databases). Among the available sources, ecoinvent is the most commonly used (24 documents), followed by GaBi (14), as shown in Figure 7. In several publications, more than one database has been adopted.

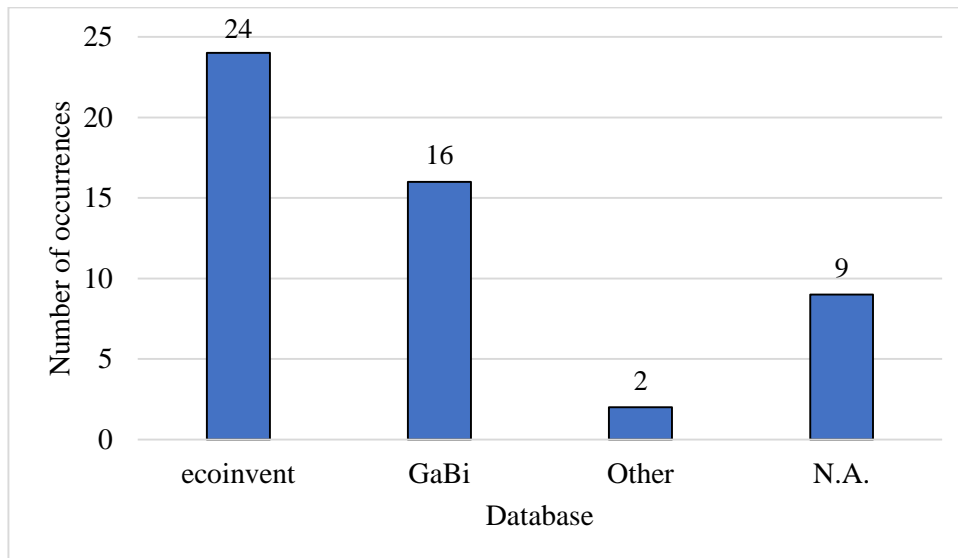


Figure 7: Background Data sources

From the review analysis, commercial databases (e.g., ecoinvent and GaBi) provide a good solution to speed up the inventory compilation for secondary data in this complex field. According to the review analysis, commercial databases (such as ecoinvent and GaBi) offer a good way to speed up the collection of secondary data inventories in this complex field. LCI step is very time-consuming and the adoption of commercial databases for secondary data is extremely helpful for life cycle vessel analyses. On the other hand, primary data from shipbuilding are necessary to reduce the variability and the uncertainty related to the construction phase (e.g., the type and amount of raw materials used, the kind and quantity of raw materials employed, manufacturing processes alternatives, ...) and to enhance the comparability of analyses performed by different researchers. Another key point to highlight when working with primary data is that the shipbuilding phase of a vessel might include a variety of shipbuilding activities and systems (e.g., hulls, superstructure, power systems, equipment, fittings, etc.), which may be different in size depending on the specific vessel. The fact that the shipbuilding phase of a vessel may involve a variety of shipbuilding activities and systems (such as hulls, superstructure, power systems, equipment, fittings, etc.), each of which may vary in size depending on the specific vessel, is another essential factor to emphasize when working with primary data. These inequalities prevent a fair comparison among various studies and vessels and it would be complex to identify good manufacturing practices, as long as a normalization of the result on a common ground is not pursued.

Typically, well-established databases are provided along with commercial tools, allowing for the quick implementation of life cycle inventory and the easy retrieval of characterisation factors for a wide range of impact categories. SimaPro is the most often utilized commercial tool (20 occurrences), followed by GaBi (16 contributions). Some specific tools have been developed, accounting for 6 occurrences, while the others have not disclosed the tool used. Figure 8 shows the software usage among the documents, where several publications employed more than one software.

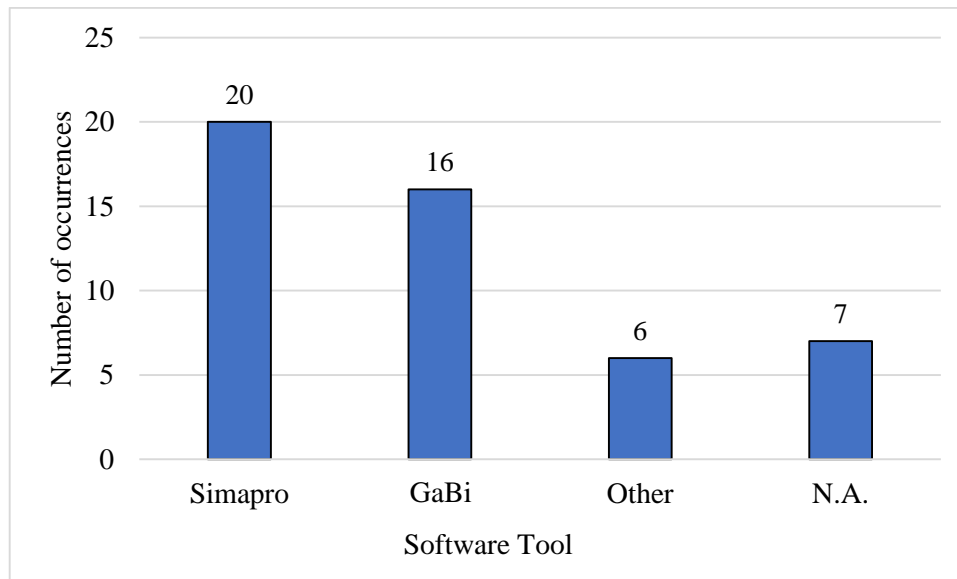


Figure 8: Software tools used for LCA calculations in the documents under investigation

Concerning the software tools used for the LCIA calculation, there are no significant differences related to the usage of a specific tool. This outcome is important in the spirit of the LCA normalization process and it suggests focusing on the type of data (both primary and secondary) and the data quality rather than the tool used for the analysis.

5. Conclusion

In this review, the authors have reported an analysis of the literature dealing with LCA studies applied to the naval sector. A number of keywords were identified selected and used in the Scopus literature search. The authors further refined the research findings based on the system boundary of the product system investigated by each paper, distinguishing between two major trends: (i) a system boundary that encompasses at least one vessel component, and (ii) a system boundary that only includes the fuel supply chain used in the naval sectors. Only full articles and conference proceedings from peer-reviewed journals were evaluated, resulting in 47 publications covering various categories of naval production, limited to product systems whose system boundaries include at least one component of the vessel. The main features of the bibliographic analysis outcomes have been analysed first, identifying the number of publications per year and per source, the authorships, and the country co-occurrence to better understand the trends and localization of LCA research in the maritime sector. The main trends in the published articles were then also presented, aiming to determine whether any LCIA methodology, background database, or software tool was more frequently used in the publications under investigation.

By following this approach, a set of guidelines were defined with the aim to create an LCA normalization framework in the naval field. The establishment of a suitable allocation model is the first recommendation, as a result of the literature review the adoption of the "Allocation Cut-off" model is suggested. Another relevant aspect to consider is the definition of the FU, which should be vessel lifetime-independent to allow for a fair comparison between vessels with different lifetimes. Moreover, in the definition of the FU, the vessel category plays an important role in defining the purpose of the operational activities. Thus, the FU shall be defined following the scope/purpose of the vessel (e.g., 1 ton of bulk cargo over one km transported by sea for cargo vessels). This classification is a key feature for ensuring a fair comparison among alternative solutions within the same vessel category, allowing for the identification of the main sources of environmental burdens based on the intrinsic function of the analysed vessel. Always concerning the FU, system boundaries require to be clearly defined, indicating which life cycle phases are considered and which ones are neglected. Furthermore, system boundaries need to be precisely defined, indicating which life cycle

phases are taken into account and which ones are ignored. The outcomes of the literature review support the splitting of the life cycle impacts of maritime vessels into specific contributions, such as “raw materials and shipbuilding”, “operation”, “maintenance”, and “end-of-life”. It is essential to report both the life cycle inventory and the outcomes of life cycle impact assessment for each life cycle phase included within the system boundary. For instance, considering the materials and manufacturing phase, practitioners shall define the modules and components included in the assessment (e.g., hull, propulsion system, superstructure, etc.), preferably indicating the specific mass of each material within every component. In terms of LCIA methods and impact categories, the literature analysis did not yield a clear conclusion about which method is best suited for the naval field. The literature review did not clearly identify the LCIA method that is most appropriate for the naval field in terms of impact categories. In order to avoid the burden-shifting effect, a set of indicators showing potential damages in different ecosystems rather than the single-issue LCIA methods shall be used. This is the case of CML-IA or ReCiPe methods, which are the most commonly used LCIA methods in the analysed publications. On the other hand, the use of secondary data from commercial LCA database is necessary due to the large amount of data to collect and manage during the LCI phase. In this direction, commercial databases such as ecoinvent or GaBi are prone to this scope. Commercial databases, such as ecoinvent or GaBi, are frequently used in this context. Finally, despite the occasional use of self-developed tools, the last recommendation involves the use of well-established software tools, which is a standard practice when performing LCA analyses. Nevertheless, there is no evidence of an influence of the calculation tool on the final LCA result. Nonetheless, there is no evidence that the calculation tool has any effect on the final LCA result.

These general guidelines allow for the establishment of a suitable normalization framework for the outcomes of LCA analyses in the naval field, which is described in details in the second part of this review (Mio et al., 2022). The normalization procedure enables LCA practitioners to generate consistent outcomes when assessing the environmental impact of maritime vessels. More specifically, it enables fair comparisons of ships among various vessel categories (“horizontal” normalization) and within particular groups of vessels (“vertical” normalization), supporting the decision-making process towards more sustainable engineering and design solutions.

6. References

- Abdou, K., Gascuel, D., Aubin, J., Romdhane, M.S., Ben Rais Lasram, F., Le Loc’h, F., 2018. Environmental life cycle assessment of seafood production: A case study of trawler catches in Tunisia. *Sci. Total Environ.* 610–611, 298–307. <https://doi.org/10.1016/j.scitotenv.2017.08.067>
- Abdou, K., Le Loc’h, F., Gascuel, D., Romdhane, M.S., Aubin, J., Ben Rais Lasram, F., 2020. Combining ecosystem indicators and life cycle assessment for environmental assessment of demersal trawling in Tunisia. *Int. J. Life Cycle Assess.* 25, 105–119. <https://doi.org/10.1007/s11367-019-01651-5>
- Bare, J., 2011. TRACI 2.0: The tool for the reduction and assessment of chemical and other environmental impacts 2.0. *Clean Technol. Environ. Policy* 13, 687–696. <https://doi.org/10.1007/s10098-010-0338-9>
- Bicer, Y., Dincer, I., 2018a. Environmental impact categories of hydrogen and ammonia driven transoceanic maritime vehicles: A comparative evaluation. *Int. J. Hydrogen Energy* 43, 4583–4596. <https://doi.org/10.1016/j.ijhydene.2017.07.110>
- Bicer, Y., Dincer, I., 2018b. Clean fuel options with hydrogen for sea transportation: A life cycle approach. *Int. J. Hydrogen Energy* 43, 1179–1193. <https://doi.org/10.1016/j.ijhydene.2017.10.157>
- Blanco-Davis, E., Zhou, P., 2014. LCA as a tool to aid in the selection of retrofitting alternatives. *Ocean Eng.* 77, 33–41. <https://doi.org/10.1016/j.oceaneng.2013.12.010>
- Burman, M., Kuttenukeuler, J., Stenius, I., Garme, K., Rosén, A., 2014. Comparative Life Cycle Assessment of the hull of a high-speed craft. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 230, 378–387.

<https://doi.org/10.1177/1475090215580050>

- Chatzinikolaou, S.D., Ventikos, N.P., 2015. Holistic framework for studying ship air emissions in a life cycle perspective. *Ocean Eng.* 110, 113–122. <https://doi.org/10.1016/j.oceaneng.2015.05.042>
- Cucinotta, F., Guglielmino, E., Sfravara, F., 2017. Life cycle assessment in yacht industry: A case study of comparison between hand lay-up and vacuum infusion. *J. Clean. Prod.* 142, 3822–3833. <https://doi.org/10.1016/j.jclepro.2016.10.080>
- Cucinotta, F., Raffaele, M., Salmeri, F., Sfravara, F., 2021. A comparative Life Cycle Assessment of two sister cruise ferries with Diesel and Liquefied Natural Gas machinery systems. *Appl. Ocean Res.* 112, 102705. <https://doi.org/10.1016/j.apor.2021.102705>
- de Bruijn, H., van Duin, R., Huijbregts, M.A.J., Guinee, J.B., Gorree, M., Heijungs, R., Huppes, G., Kleijn, R., de Koning, A., van Oers, L., Wegener Sleeswijk, A., Suh, S., Udo de Haes, H.A. (Eds.), 2002. Handbook on Life Cycle Assessment. *Eco-Efficiency in Industry and Science* 7. <https://doi.org/10.1007/0-306-48055-7>
- Dong, D.T., Cai, W., 2020. Life-cycle assessment of ships: The effects of fuel consumption reduction and light displacement tonnage. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 234, 143–153. <https://doi.org/10.1177/1475090219858810>
- Dong, D.T., Cai, W., 2019. A comparative study of life cycle assessment of a Panamax bulk carrier in consideration of lightship weight. *Ocean Eng.* 172, 583–598. <https://doi.org/10.1016/j.oceaneng.2018.12.015>
- EC-JRC, 2012. Characterisation factors of the ILCD Recommended Life Cycle Impact Assessment methods: database and supporting information, European Commission. <https://doi.org/10.2788/60825>
- Favi, C., Campi, F., Germani, M., Manieri, S., 2018a. Using design information to create a data framework and tool for life cycle analysis of complex maritime vessels. *J. Clean. Prod.* 192, 887–905. <https://doi.org/10.1016/j.jclepro.2018.04.263>
- Favi, C., Campi, F., Mandolini, M., Germani, M., 2019. Using engineering documentation to create a data framework for life cycle inventory of welded structures, in: *Procedia CIRP*. Elsevier B.V., pp. 358–363. <https://doi.org/10.1016/j.procir.2019.01.006>
- Favi, C., Germani, M., Campi, F., Mandolini, M., Manieri, S., Marconi, M., Vita, A., 2018b. Life Cycle Model and Metrics in Shipbuilding: How to Use them in the Preliminary Design Phases, in: *Procedia CIRP*. Elsevier B.V., pp. 523–528. <https://doi.org/10.1016/j.procir.2017.11.071>
- Favi, C., Raffaeli, R., Germani, M., Gregori, F., Manieri, S., Vita, A., 2017. A Life Cycle Model to assess costs and environmental impacts of different maritime vessel typologies. *Proc. ASME 2017 Int. Des. Eng. Tech. Conf. Comput. Inf. Eng. Conf.* 1–12.
- Fet, A.M., Margrethe Aspen, D., Ellingsen, H., 2013. Systems engineering as a holistic approach to life cycledesigns. *Ocean Eng.* 62, 1–9. <https://doi.org/10.1016/j.oceaneng.2013.01.003>
- Gilbert, P., Wilson, P., Walsh, C., Hodgson, P., 2017. The role of material efficiency to reduce CO2 emissions during ship manufacture: A life cycle approach. *Mar. Policy* 75, 227–237. <https://doi.org/10.1016/j.marpol.2016.04.003>
- Goedkoop, M., Spriensma, R., 2000. The Eco-indicator 99 A damage oriented method for Life Cycle Impact Assessment Methodology Report.
- González-García, S., Villanueva-Rey, P., Belo, S., Vázquez-Rowe, I., Moreira, M.T., Feijoo, G., Arroja, L., 2015. Cross-vessel eco-efficiency analysis. A case study for purse seining fishing from North Portugal targeting European pilchard. *Int. J. Life Cycle Assess.* 20, 1019–1032. <https://doi.org/10.1007/s11367-015-0887-6>

- Gratsos, G.A., Psaraftis, H.N., Zachariadis, P., 2010. Life-cycle co2 emissions of bulk carriers: A comparative study. *Trans. R. Inst. Nav. Archit. Part A Int. J. Marit. Eng.* 152. <https://doi.org/10.3940/rins.ijme.2010.a3.176>
- Huijbregts, M.A.J., Steinmann, Z.J.N., Elshout, P.M.F., Stam, G., Verones, F., Vieira, M., Zijp, M., Hollander, A., van Zelm, R., 2017. ReCiPe2016: a harmonised life cycle impact assessment method at midpoint and endpoint level. *Int. J. Life Cycle Assess.* 22, 138–147. <https://doi.org/10.1007/s11367-016-1246-y>
- IMO - International Maritime Organization, 2019. IMO 2020 Consistent Implementation of MARPOL ANNEX VI.
- IMO - Marine Environment Protection Committee, 2020. MEPC 75/7/15 - Reduction of GHG emissions from ships. Fourth IMO GHG Study 2020, International Maritime Organization.
- Jeong, B., Wang, H., Oguz, E., Zhou, P., 2018. An effective framework for life cycle and cost assessment for marine vessels aiming to select optimal propulsion systems. *J. Clean. Prod.* 187, 111–130. <https://doi.org/10.1016/j.jclepro.2018.03.184>
- Jolliet, O., Margni, M., Charles, R., Humbert, S., Payet, J., Rebitzer, G., Rosenbaum, R., 2003. IMPACT 2002+: A New Life Cycle Impact Assessment Methodology. *Int. J. Life Cycle Assess.* <https://doi.org/10.1007/BF02978505>
- Kjær, L.L., Pagoropoulos, A., Hauschild, M., Birkved, M., Schmidt, J.H., McAloone, T.C., 2015. From LCC to LCA using a hybrid Input Output model - A maritime case study, in: *Procedia CIRP*. Elsevier, pp. 474–479. <https://doi.org/10.1016/j.procir.2015.02.004>
- Ling-Chin, J., Roskilly, A.P., 2016a. Investigating a conventional and retrofit power plant on-board a Roll-on/Roll-off cargo ship from a sustainability perspective - A life cycle assessment case study. *Energy Convers. Manag.* 117, 305–318. <https://doi.org/10.1016/j.enconman.2016.03.032>
- Ling-Chin, J., Roskilly, A.P., 2016b. Investigating the implications of a new-build hybrid power system for Roll-on/Roll-off cargo ships from a sustainability perspective – A life cycle assessment case study. *Appl. Energy* 181, 416–434. <https://doi.org/10.1016/j.apenergy.2016.08.065>
- Ling-Chin, J., Roskilly, A.P., 2016c. A comparative life cycle assessment of marine power systems. *Energy Convers. Manag.* 127, 477–493. <https://doi.org/10.1016/j.enconman.2016.09.012>
- Mio, A., Bertagna, S., Cozzarini, L., Laurini, E., Bucci, V., Marinò, A., Fermeglia, M., 2021. Multiscale modelling techniques in life cycle assessment: Application to nanostructured polymer systems in the maritime industry. *Sustain. Mater. Technol.* 29. <https://doi.org/10.1016/j.susmat.2021.e00327>
- Mio, A., Fermeglia, M., Favi, C., 2022. A critical review and normalization of the life cycle assessment outcomes in the naval sector - Articles description. In press
- Nam, S., Lee, D.K., Jeong, Y.K., Lee, P., Shin, J.G., 2016. Environmental impact assessment of composite small craft manufacturing using the generic work breakdown structure. *Int. J. Precis. Eng. Manuf. - Green Technol.* 3, 261–272. <https://doi.org/10.1007/s40684-016-0034-2>
- Nian, V., Yuan, J., 2017. A method for analysis of maritime transportation systems in the life cycle approach – The oil tanker example. *Appl. Energy* 206, 1579–1589. <https://doi.org/10.1016/j.apenergy.2017.09.105>
- Önal, M., Neşer, G., 2018. End-of-life alternatives of glass reinforced polyester boat hulls compared by LCA. *Adv. Compos. Lett.* 27, 134–141. <https://doi.org/10.1177/096369351802700402>
- Park, T., So, S., Jeong, B., Zhou, P., Lee, J. ung, 2020. Life cycle assessment for enhanced Re-liquefaction systems applied to LNG carriers; effectiveness of partial Re-liquefaction system. *J. Clean. Prod.* <https://doi.org/10.1016/j.jclepro.2020.124832>

- Pennington, D.W., Potting, J., Finnveden, G., Lindeijer, E., Jolliet, O., Rydberg, T., Rebitzer, G., 2004. Life cycle assessment Part 2: Current impact assessment practice. *Environ. Int.* <https://doi.org/10.1016/j.envint.2003.12.009>
- Pommier, R., Grimaud, G., Prinçaud, M., Perry, N., Sonnemann, G., 2016. Comparative environmental life cycle assessment of materials in wooden boat ecodesign. *Int. J. Life Cycle Assess.* 21, 265–275. <https://doi.org/10.1007/s11367-015-1009-1>
- Prinçaud, M., Cornier, A., Froëlich, D., 2010. Developing a tool for environmental impact assessment and eco-design for ships. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 224, 207–224. <https://doi.org/10.1243/14750902JEME185>
- Quang, P.K., Dong, D.T., Hai, P.T.T., 2021. Evaluating environmental impacts of an oil tanker using life cycle assessment method. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 235, 705–717. <https://doi.org/10.1177/1475090221989195>
- Quang, P.K., Dong, D.T., Van, T.V., Hai, P.T.T., 2020. Greenhouse gas emissions of a cargo ship from a life cycle perspective. *Int. J. Environ. Sci. Dev.* 11, 347–351. <https://doi.org/10.18178/IJESD.2020.11.7.1274>
- Ramos, S., Vázquez-Rowe, I., Artetxe, I., Moreira, M.T., Feijoo, G., Zufía, J., 2011. Environmental assessment of the Atlantic mackerel (*Scomber scombrus*) season in the Basque Country. Increasing the timeline delimitation in fishery LCA studies. *Int. J. Life Cycle Assess.* 16, 599–610. <https://doi.org/10.1007/s11367-011-0304-8>
- Rebitzer, G., Ekvall, T., Frischknecht, R., Hunkeler, D., Norris, G., Rydberg, T., Schmidt, W.P., Suh, S., Weidema, B.P., Pennington, D.W., 2004. Life cycle assessment Part 1: Framework, goal and scope definition, inventory analysis, and applications. *Environ. Int.* <https://doi.org/10.1016/j.envint.2003.11.005>
- Stocker, T.F., Qin, D., Plattner, G.-K., Tignor, M., Allen, S.K., Boschung, J., Nauels, A., Xia, Y., Bex, V., Midgley, P.M., 2013. IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change.
- Tchertchian, N., Millet, D., Yvars, P.A., 2016. The influence of the level of definition of functional specifications on the environmental performances of a complex system. EcoCSP approach. *Int. J. Sustain. Eng.* 9, 277–290. <https://doi.org/10.1080/19397038.2015.1085110>
- Tchertchian, N., Yvars, P.A., Millet, D., 2013. Benefits and limits of a Constraint Satisfaction Problem/Life Cycle Assessment approach for the ecodesign of complex systems: A case applied to a hybrid passenger ferry. *J. Clean. Prod.* 42, 1–18. <https://doi.org/10.1016/j.jclepro.2012.10.048>
- The International Standards Organisation, 2021a. ISO 14040 Environmental management - Life cycle assessment - Principles and framework.
- The International Standards Organisation, 2021b. ISO 14044 Environmental management - Life cycle assessment - Requirements and guidelines.
- Tuan, D.D., Wei, C., 2019. Cradle-to-gate life cycle assessment of ships: A case study of Panamax bulk carrier. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 233, 670–683. <https://doi.org/10.1177/1475090218813731>
- Van Zelm, R., Huijbregts, M.A.J., Van De Meent, D., 2009. USES-LCA 2.0-a global nested multi-media fate, exposure, and effects model. *Int. J. Life Cycle Assess.* 14, 282–284. <https://doi.org/10.1007/s11367-009-0066-8>
- Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018a. Optimisation of operational modes of short-route hybrid ferry: A life cycle assessment case study. *Marit. Transp. Harvest. Sea Resour.* 2, 961–970.

- Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018b. Life cycle cost and environmental impact analysis of ship hull maintenance strategies for a short route hybrid ferry. *Ocean Eng.* 161, 20–28.
<https://doi.org/10.1016/j.oceaneng.2018.04.084>
- Wang, H., Zhou, P., 2018. Systematic evaluation approach for carbon reduction method assessment – A life cycle assessment case study on carbon solidification method. *Ocean Eng.* 165, 480–487.
<https://doi.org/10.1016/j.oceaneng.2018.07.050>
- Wang, H., Zhou, P., Liang, Y., Jeong, B., Mesbahi, A., 2020. Optimization of tugboat propulsion system configurations: A holistic life cycle assessment case study. *J. Clean. Prod.* 259, 120903.
<https://doi.org/10.1016/j.jclepro.2020.120903>
- Ytreberg, E., Åström, S., Fridell, E., 2021. Valuating environmental impacts from ship emissions – The marine perspective. *J. Environ. Manage.* 282. <https://doi.org/10.1016/j.jenvman.2021.111958>
- Ziegler, F., Groen, E.A., Hornborg, S., Bokkers, E.A.M., Karlsen, K.M., de Boer, I.J.M., 2018. Assessing broad life cycle impacts of daily onboard decision-making, annual strategic planning, and fisheries management in a northeast Atlantic trawl fishery. *Int. J. Life Cycle Assess.* 23, 1357–1367.
<https://doi.org/10.1007/s11367-015-0898-3>

Wordcount: 20944

A critical review and normalization of the life cycle assessment outcomes in the naval sector. ~~Part 2~~ Articles description

Andrea Mio^{a*}, Maurizio Fermeglia^a, Claudio Favi^b

a. MolBNL@UniTS, Department of Engineering and Architecture, University of Trieste, Italy

b. Department of Engineering and Architecture, University of Parma, Italy

* Corresponding author e-mail: amio@units.it

Abstract

Most of the actual industrial research efforts are aimed at reducing environmental burdens associated with human activities in the context of sustainable development. This trend has become increasingly prevalent in the naval transportation sector shown by a growing number of scientific publications dealing with life cycle assessments of maritime-related activities. However, the life cycle assessment framework provides practitioners with a variety of alternatives for conducting the analyses, giving room for defining key factors, such as functional units, system boundaries, and impact assessment methods, among others. This lack of standardization resulted in a wide range of assumptions and findings that are seldom comparable. The goal of this review is providing a systematic literature analysis, focusing on the characteristics of life cycle assessments dealing with the environmental impacts of various maritime vessel categories. In the first part, a qualitative analysis of the available scientific literature has been performed, providing a bibliometric analysis and a general overview of the characteristics of the studies (*i.e.*, life cycle impact assessment methodologies, background data, and software tools used). The outcomes of the bibliometric analysis are then summarized and discussed to understand current practices and future trends in this field, providing the basis for the normalization phase of the results. The second section of the paper offers advice for naval practitioners on how to perform results normalization to produce comparable analyses. Two approaches for normalization have been proposed in the frame of this study: an “horizontal” one, which is based on vessel features and allows a comparison among different vessel typologies, and a “vertical” one that enables to fairly compare vessels of the same category to one another. In addition, each section reports the outcomes of greenhouse gas-related impact categories, which have been subjected to the proposed normalization procedure, along with the order of magnitude of the results for each life cycle phase. The overall work provides an overview of LCA impact results as well as a collection of procedures and recommendations for future life cycle assessments based on specific vessel types, in terms of functional unit selection, system boundary definition, impact assessment approach, presentation of the outcomes, and normalization basis.

Keywords: LCA, Life Cycle Assessment, Life Cycle Analysis, Naval, Ship, Maritime

Glossary

ADE: Abiotic Depletion of Elements

ADF: Abiotic Depletion of Fossil fuels

AP: Acidification Potential

BAU: Business As Usual

CAD: Computer-Aided Design

CC: Climate Change

CCS: Carbon Capture and Storage

CED: Cumulative Energy Demand

CFC: ChloroFluoroCarbon

CPC: Central Product Classification

CTUe: Comparative Toxic Units ecotoxicity

CTUh: Comparative Toxic Units for human

DCB: DiChloroBenzene

DE: Diesel Electrical

DM: Diesel Mechanical

DWT: DeadWeight Tonnage

ECA: Emission Control Area

EcoCSP: Ecological Constraint Satisfaction Problem

EI99: EcoIndicator 99

EIO: Economic Input-Output

EEZ: Exclusive Economic Zone

EoL: End of Life

EP: Eutrophication Potential

EPD: Environmental Product Declaration

ETP: EcoToxicity Potential

EU: Europe/European

FD: Fossil Depletion

FETP: Freshwater EcoToxicity Potential

FEU: Freshwater Eutrophication

FRC: Fouling Release Coating

FU: Functional Unit

GHG: GreenHouse Gas

GMAW: Gas Metal Arc Welding

GT: Gross Tonnage

GTAW: Gas Tungsten Arc Welding

GWP: Global Warming Potential

HCE: Human Carcinogenic Effects

HCFC: HydroChloroFluoroCarbon

HFO: Heavy Fuel Oil

~~HNCE: Human Non-Carcinogenic Effects~~

HTP: Human Toxicity Potential

ILCD: International reference Life Cycle Data system

~~IMO: International Maritime Organization~~

IPCC: Intergovernmental Panel on Climate Change

IR: Ionising Radiation

ISO: International Organization for Standardization

LCA: Life Cycle Assessment

LCC: Life Cycle Costing

LCI: Life Cycle Inventory

LCIA: Life Cycle Impact Assessment

LES: Lifecycle Emission Share

LNG: Liquefied Natural Gas

~~LOP: Land Occupation Potential~~

~~LSHFO: Low-Sulfur Heavy Fuel Oil~~

~~LU: Land Use~~

LWT: Lightship Weight

MD: Metal Depletion

MDO: Marine Diesel Oil

METP: Marine EcoToxicity Potential

MEU: Marine EUtrophication

MSETP: Marine Sediment EcoToxicity Potential

N.A.: Not Applicable – Not Available

~~NM VOC: Non-Methane Volatile Organic Compounds~~

~~NLT: Natural Land Transformation~~

ODP: Ozone Depletion Potential

PM: Particulate Matter

~~PMFP: Particulate Matter Formation Potential~~

POCP: Photochemical Ozone Creation Potential

POFP: Photochemical Oxidant Formation Potential

~~RDE: Resource Depletion of Elements~~

~~RDF: Resource Depletion of Fossil fuels~~

~~RE: Respiratory Effect~~

RoPax: Roll-on/roll-off Passenger

RoRo: Roll-on/roll-off

S: Smog

SLCA: Social Life Cycle Assessments

SMAW: Shielded Metal Arc Welding

SMR: Single Mixed Refrigerant

TETP: Terrestrial EcoToxicity Potential

TEU: Terrestrial EUtrophication

TRACI: Tool for Reduction and Assessment of Chemicals and other environmental Impacts

TTW: Tank To Wake

ULCC: Ultra Large Crude Carrier

VLCC: Very Large Crude Carrier

VOC: Volatile Organic Compound

WTT: Well-To-Tank

WTW: Well-To-Wake

WUD: Water Use Depletion

1. Introduction

This work deals with the publications available for review examines the scientific literature dealing with specific vessel categories, providing a guidance in order to serve as a reference for practitioners investigating the environmental performance of peculiar vessels. The analysed publications have been gathered by vessel types categories, allowing the reader to focus on past research dealing with specific vessel groups, with the goal of providing some benchmark values against which future investigations may be compared. As reported by Mio et al. (2022), numerous environmental categories have been employed among the investigated documents, posing a critical issue for a full collection of the outcomes in a single review. In order to improve readability, this review solely reports the results of GreenHouse Gas (GHG)-related impact categories, although the proposed normalization approach may be applied to any impact category. The vessels have been categorized using the Central Product Classification (CPC) codes (Department of Economic and Social Affairs, 2015), which represent specific industrial products within a larger product categorization system that encompasses all commodities and services.

Individual aspects of LCA works developed for specific vessel categories have been described in the following sections. The following sections discuss the common characteristics of life cycle assessment (LCA) works developed for distinct vessel categories, with the goal of addressing the principal flaw of the primary issue with life cycle assessments in the naval field, i.e., an namely, the inconsistent presentation of the outcomes. Moreover, an index was proposed to highlight among the vessel typologies the most efficient in terms of environmental impacts. Additionally, a ranking system to identify the vessel categories with the lowest environmental impact was suggested. To the best of authors' knowledge, a systematic review of the applications of LCA in the wide range of maritime vessels and ships has not been published yet.

2. Methods

The most ambitious aim of this review is **providing to provide** a guideline for future publications **related to LCA of ships and maritime systems** towards a standard presentation of results, enhancing **the** repeatability and robustness of the studies. Based on the outcomes of the first part of this review (Mio et al., 2022) and following the recommendations prescribed by ISO 14044 (The International Standards Organisation, 2021), information such as functional unit, system boundary, allocation **procedures** approach and **LCIA methods (among others)** **Life Cycle Impact Assessment (LCIA) methods, among others**, needs to be clearly stated. These results are reported and summarized in the first part of the literature review (Mio et al., 2022) and provide the framework for the normalization process. Furthermore, the outcomes should be presented in such a way that the contribution from each stage of the life cycle is explicitly outlined and standardized, **so that they can be compared to other studies.** **to allow for comparison with other studies.** In this context, practitioners in **the** naval sector should perform the normalization step described by the ISO standards (The International Standards Organisation, 2021) **during life cycle impact assessment phase**, using the following approach and reference flows:

- A cradle-to-gate analysis of the vessel itself, until the vessel delivery. System boundary should comprehend extraction, refinement, and transportation of materials and shipbuilding activities. This information provides a deeper insight **into** the construction materials and shipbuilding practices, whose impacts are usually hidden by the burdensome operation activities. Vessels may involve comparable shipbuilding activities but may require **a** different amount of materials for construction, *i.e.*, **they may display a** different lightship weight (LWT). These inequalities prevent a fair comparison among various studies and vessels and it would be complex to highlight the good manufacturing practice, as long as a normalization of the result on a common ground is not pursued. Furthermore, the reference service life may be different between vessels, restraining again the comparability between studies.

In this scenario, practitioners should present the outcomes of this life cycle phase normalized on the lightship weight (LWT) of the vessel on a year-basis, as presented in Eq.(1):

$$\text{Shipbuilding} = \frac{\text{Impacts of shipbuilding operations and construction materials}}{\text{LWT [ton]} * \text{lifetime [yr]}} \quad (1)$$

Benefits and drawbacks of this approach can be summarized as follows:

- it allows **to compare** **comparing** vessels of various categories and sizes. Since this approach exhibits the impacts of shipbuilding activities and construction materials, its application is not restricted to a comparison among vessels of the same category, but can be extended to any generic vessel, allowing a comparison between a massive wooden vessel and a lighter aluminium motor yacht;
- a mass-based functional unit exhibits the intrinsic impacts of construction materials, promoting the employment of novel greener material alternatives;
- it enables the comparison of literature data with any future study under identical system boundaries for any vessels' lightship weight;
- a fair comparison between vessels with different service lifetime can be performed;
- the main disadvantage is the lack of clarity of the impacts of the vessel construction to the reader. It is common practice to show the impacts related to the overall shipbuilding phase using the entire vessel as normalization basis, which is rather simple to understand. It is desirable to report both the results normalized on the vessel itself and on the lightship weight and lifetime;

- shipyards are usually able to supply specific documents such as lightship weight document, engines datasheets and **Computer-Aided Design (CAD)** models, where information for compiling life cycle inventory can be retrieved (Favi et al., 2018a);
- when only the majority of the vessel's mass, at least the hull and superstructures, is included within the system boundary, the LWT and lifetime normalization may still be valid. However, when the system boundary excludes the heaviest structures of the vessel, this normalization basis appears inadequate and the weight of the product system under investigation should be used. For instance, the weight of the engines (in [ton]) should be utilized as the normalization basis when the power system is the only part of the vessel included within the system boundary.
- **The impact indicators of the operational phase should be presented separately from other life cycle phases and can be done by following two approaches** Two methods can be used to normalize the operational phase's impact indicators separately from those of the other life cycle phases: (i) a “vertical” normalization carried out by following the vessel function and allowing a comparison of vessels belonging to the same category, and (ii) a “horizontal” normalization carried out by following the vessel features, allowing a comparison of different vessels regardless of their functions. Knowing that the operational phase is the most burdensome life cycle phase of a vessel, many authors focused their studies on identifying the best alternatives in terms of fuel choice, engine technology, fuels supply chain, and so on. Thus, the assessment of life cycle impacts using the normalization basis adopted for the operational phase, can be generally used as the most representative of the life cycle's overall impacts, at least for climate change-related issues. Concerning the vertical normalization, the different purposes of marine vessels (transportation of a person, shipping of cargo, fishing, provision of services to other vessels, leisure, etc.) require a specific definition of the function of the product system, **determining the normalization of the results on different bases**. The recommended vertical normalization bases for the operational activities of each vessel **type-category** are reported in Table 1. The descriptions of the rationale behind each normalization basis can be found in the sections dedicated to peculiar vessel categories.

Table 1: CPC codes of the vessel types analysed in this review along with the proposed operational phase normalization

Vessel type	CPC code	Operational phase*	Equation
Cruise and ferry boats	49311	$Operation = \frac{Impacts\ of\ operational\ phase}{passengers[\#] * distance[km] * trips[\#]}$	(2)
Tankers	49312	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(3)
LNG carriers	49313	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(4)
Cargo vessel	49314	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(5)
Fishing vessels	49315	$Operation = \frac{Impacts\ of\ operational\ phase}{landing[ton] * distance[km] * trips[\#]}$	(6)
Tug boats	49316	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(7)
Pleasure and sporting boats	494	$Operation = \frac{Impacts\ of\ operational\ phase}{passengers[\#] * time[hr]}$	(8)

*[#] stands for dimensionless quantities

The development of a given normalization basis for each vessel type brings the following consequences:

- each normalized indicator depicts the environmental performance of the product system for each unique vessel function, making it easy to comprehend;
- within the specific vessel category, comparability on the vessel peculiar function is guaranteed;
- the usage of the normalized indicator is suitable for LCA studies where only the operational phase is considered within the system boundary, *e.g.*, life cycle analysis of a product transported by cargo vessel;
- a comparison between the operational activities of vessels belonging to the same category is allowed.

Concerning the horizontal normalization, the different features/parameters of a vessel (size, weight, dimensions, power, etc.) can be used to overcome the rigid ship-type scheme. The recommended horizontal normalization basis for the operational activities based on vessel features/parameters is reported in Eq.(9).

$$Efficiency\ Ratio = \frac{\frac{Impacts\ of\ shipbuilding\ activities\ and\ construction\ materials}{Impacts\ of\ operational\ phase}}{\frac{Engine\ Power\ [kW]}{LWT\ [ton]}} \quad (9)$$

The engine power [kW] to lightship weight (LWT in [ton]) ratio is used as an indicator of vessel design efficiency, and it can be used to normalize the ratio of emissions throughout shipbuilding and navigation, regardless of ship category. The Efficiency Ratio enables a comparison between the operational activities of vessels belonging to any vessel category.

- An indicator focused on maintenance routine should be added when these activities are within the system boundary. Maintenance procedure usually includes activities such as equipment substitution or repainting, which are usually proportional to the vessel's dimension. Therefore, the presentation of the impact scores based on the lightship weight (LWT) and service lifetime is suggested, as reported in Eq.(10):

$$Maintenance = \frac{Impacts\ of\ maintenance\ activities\ and\ materials}{LWT\ [ton] * lifetime[yr]} \quad (10)$$

The introduction of this normalization basis guarantees several benefits:

- it allows the comparison of similar maintenance activities, even if they have been performed on different size vessel, *e.g.*, the usage of diverse paints and coatings from distinct LCAs;
- a mass-based functional unit exhibits the intrinsic impacts of maintenance materials and operations, promoting the employment of less burdensome alternatives;
- it enables the comparison of literature data with any future study under identical system boundaries for any vessels' lightship weight;
- a fair comparison between maintenance activities of vessels with different service lifetime can be performed;
- since this method shows the effects of maintenance operations and materials, it may be applied to any vessel, not only those in the same category;
- the main disadvantage is the lack of clarity of the impacts of the vessel maintenance to the reader. It is common practice to show the impacts of the maintenance activities over the entire lifetime, which is rather simple to understand. It is desirable to report both the results normalized on the vessel itself and on the lightship weight and lifetime;

- An analogous normalization procedure should be used for the end-of-life impact scores. Compiling life cycle inventories for the end-of-life scenarios is challenging, since the disposal of vessels is usually uncertain. When this life cycle phase is within the system boundary of the vessel under study (cradle-to-grave approach), the end-of-life treatment impacts should be normalized on a lightship weight and lifetime bases, as shown in Eq.(11):

$$EoL = \frac{\text{Impacts of disposal treatments}}{LWT [\text{ton}] * \text{lifetime}[\text{yr}]} \quad (11)$$

The advantages and drawbacks of this approach are equivalent to the ones reported for the maintenance normalization basis.

3. Normalized LCA outcomes from the literature review

This section aims at presenting the LCA outcomes of the studies dealing with maritime vessels available in the scientific literature by applying the normalization procedures previously defined. The normalized results can serve as benchmarks for each vessel group (vertical normalization, presented in section 3.1.), as well as for the comparison of vessels regardless of the function/purpose (horizontal normalization, presented in section 3.2). Finally, section 3.3 refers to the LCA results of studies carried out to investigate vessel-related activities.

3.1. Vertical normalization based on vessel function

The results presented hereafter provide a comparison of LCA analysis based on the function provided by the specific vessel category. The vertical normalization, performed at vessel type, leads to two crucial outcomes: (i) identify the emerging trend and sustainable design solutions developed for specific vessel group, and (ii) provide some benchmark values for practitioners in this field.

3.1.1. Cruise and Ferry Boats

Cruise ships and ferry boats have been grouped together due to their common purpose of transporting passengers from one location to another. The cruise ships are designed to carry passengers traveling roundtrip for pleasure and stopping at different ports, while ferry boats are used for the transport of both persons and vehicles from point A to point B. They are both classified under CPC code 49311: “Cruise ships, excursion boats and similar vessels, principally designed for the transport of persons; ferry boats of all kinds”.

Since the main purpose of this critical review is providing a standardization basis on a reference unit to normalize the environmental impacts of the operational phase for different vessel types, the normalization basis needs to involve the inclusion of three factors: the number of passengers transported each trip (which is unitless and represented using symbol [#]), the weighted average trip distance expressed in kilometres [km] and the number of trips [#] performed during the timespan under investigation, as shown in Eq.(2) of Table 1. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary Materials.

The eight peer-reviewed publications available for this vessel category were examined, following a temporal sequence. The publications dealing with Well-To-Wake (WTW) analysis, *i.e.*, including exclusively the life cycle of the fuel within the system boundary, based on the operational profiles of ferry boats were excluded. Tchertchian et al. (2013) employed optimization techniques such as Pareto, Design of Experiment and Constraint Satisfaction Problems in combination with LCA. Their aim was to identify the environmentally optimized configuration during the conceptual design phase of an aluminium ferry boat in terms of both structural and propulsion systems. In this paper, the minimization of the CML-IA and EI99 impact categories was the designed target of the optimization algorithms used to define the product system with the lowest overall environmental burdens. Unfortunately, the presented results provide qualitative information only,

preventing the comparison with other literature values. As a general trend, the operational phase exhibits the worst environmental footprint. The authors further extend their work on a following publication (Tchertchian et al., 2016) where they deepened the definition of the functions provided by product systems, discerning between the essential functions and the negotiable services. Each alternative design simultaneously affects various vessel functions, leading to an unavoidable trade-off among optimum performances within each non-essential function constraints, which was bounded between minimum and maximum limits. ~~The proposed EcoCSP approach (which stands for Ecological Constraint Satisfaction Problem)~~ The proposed Ecological Constraint Satisfaction Problem (EcoCSP) allows defining both suitable combinations of available technologies and the functional mix that significantly reduces the environmental impacts related to vessel construction and operation. Indeed, LCA is not only employed as a comparison tool, but also as an eco-design technique, using “2400 passengers transported a day” as a functional unit. Furthermore, the scores of environmental impact categories belonging to CML-IA method and EI99 are presented for the entire life cycle, excluding the end-of-life. Average values among the alternative designs have been taken as benchmarks and normalization has been applied on total transported passengers during the boat daily routine (2300-2400) and distance travelled by each person (13.89 km), using the information provided on both papers of the research group (Tchertchian et al., 2016, 2013). The features of the analysed vessels are reported in Table 2, while the CML-Global Warming Potential (GWP) impact category score is reported in Figure 1 and Table S.1 of the Supplementary Materials.

Blanco-Davis et al. (2014) assessed the retrofit potential environmental impacts of a ferry using the LCA methodology, as shown in Table 2. Their scope was to highlight the benefits of the switch from conventional antifouling coating to a Fouling Release Coating (FRC) system based on a silicone elastomer technology. The functional unit inferred from the interpretation of the paper is “the vessel construction, maintenance, operation and disposal over the lifetime of 25 years”. Two case studies have been developed, distinguished by a regular maintenance of the conventional antifouling coating or a switch to the FRC system after half of vessel lifespan, which leads to a lower fuel consumption for the remaining operational activities. Due to the comparative purpose of this study, shipbuilding materials and activities encompass only the essential elements of the vessel, *i.e.*, hull, accommodation and main machinery. Fuel consumption is modelled considering an average speed of 25 knots, as the vessel's operational profile follows a regular sailing schedule on long trips. The assessment makes use of the GWP impact category within CML-IA method, splitting the overall environmental burden into the contributions from shipbuilding, maintenance, operation and disposal. The environmental impacts for shipbuilding, maintenance and end-of-life phases have been normalized using Eq.(1) for a comparison with other works in the same field, as reported in Figure 1 and Table S.1 of Supplementary Material. However, since the passenger capacity is not defined, the results of the operational phase are unsuitable for normalization over the total number of passengers transported and the distance travelled by each one. From an environmental and economic standpoint, antifouling coating replacement outperforms the standard antifouling technology.

A comparative life cycle study among several boat construction materials has been carried out by Pommier et al. (2016), whose assessment analysed the usage of aluminium, composite material, local (French) or African wood for the hull of a small passenger ferry travelling within Archachon Bay, as reported in Table 2. Data have been retrieved within ecoinvent database and completed with information obtained from a local boatyard, Environmental Product Declarations (EPDs) and a private database, using a cradle-to-grave approach. Even though the authors chose the function of the ferry as functional unit (“transportation of 60 passengers and 20 bikes for 30 years”), they removed the contribution of the fuel consumption from the presented results, aiming at better highlighting the impacts of each construction material life cycle. A more suitable simplified functional unit would have been “the construction, maintenance and disposal of the hull of a ferry boat transferring 60 passengers and 20 bikes for 30 years”. This is a typical case when the usage of the impacts normalization on the lightship weight and expected lifetime is beneficial in order to standardize the results and perform a fair comparison. In fact, a normalization of the outcomes based on the varied

lifespan and lightweight weight of the boats would have changed the results, boosting the performances of aluminium hulls over composite hulls for all impact categories and even reducing the impacts for wood hulls. These results are mainly driven by the different lifetime of the vessels, which should be accounted for an equal comparison, as a longer vessel lifespan distributes the shipbuilding impacts over a longer timespan). In the original paper the maintenance activities have been accounted for 30 years only, therefore this comparison still needs to be improved, although the impacts generated by maintenance activities are usually negligible in comparison with shipbuilding ones. The authors incorporated the lifetimes into the solutions; nevertheless, it is unclear how the various lifetimes affected the outcomes. The normalized results confirmed and reinforced the authors' conclusions, suggesting a higher employment of wood for boat hull construction from an environmental viewpoint, particularly for impacts related to Climate Change (CC). The original and normalized scores for CC impact category are reported in Table S.1 of Supplementary Materials and graphically in Figure 1.

Wang et al. (2018a) used GaBi database in combination with four impact categories, *i.e.*, GWP, Acidification Potential (AP), Eutrophication Potential (EP), and Photochemical Ozone Creation Potential (POCP), to assess the environmental and economic impacts of installing and operating a short-route hybrid ferry power system, applying a life cycle approach to optimize the operational activities. Furthermore, the authors developed three built-in models for fuels (Marine Diesel Oil-MDO and Heavy Fuel Oil-HFO), transportation (fuel consumption and emission released due to specific transportation distance by 3.3-ton payload lorry) and scrapping (energy required by scrapping processes of different materials). The manufacturing and installation of the main engines and batteries, as well as several operational profiles, maintenance and the scrapping phase, fell within the system boundary, ensuring a cradle-to-grave approach. Several operational profiles, maintenance without materials, scrapping phase, and the production and installation of the main engines and batteries all fell inside the system boundary, ensuring a cradle-to-grave approach. Different propulsion systems (Hybrid, Diesel Electrical, and Diesel Mechanical) were studied, covering a wide variety of potential configurations. The same research group published a more extensive analysis on the same product system in another paper (Jeong et al., 2018). In this work, the authors developed a modular framework for identifying the best ship design among various choices regarding cost and environmental impacts in the long-run. Each module dealt with a specific ship structure on a single life cycle stage. The composition of various models gave rise to several product systems, which have been compared to identify the optimal solution using a dedicated tool (LabVIEW). In this paper, the presentation of the authors' methodology was followed by two case studies, one of which focused on the cradle-to-grave LCA of different engines construction, installation and operation on a Ro-Pax ferry, as reported in Table 2. The propulsion alternatives comprehended diesel mechanical (DM), diesel electrical (DE) and hybrid installations, which have been investigated through sensitivity analyses using various LCIA methods (CML-IA and 2010, TRACI and ReCiPe) and electricity sources for battery charging. The system boundaries were restricted to the engines only, therefore the results are not suitable for a comparison with other LCA studies on ferry vessels. In general, the hybrid system was the most environmentally friendly on the impact categories calculated (GWP, AP, EP, POCP) and the operational phase revealed as the most burdensome life cycle phase. Moreover, sensitivity analyses displayed lower emissions and costs when the battery usage was maximum, showing a fruitful relationship between the adoption of the hybrid solution and the reduction in cost and emissions. The results of the paper along with normalized values are reported in Table S.1 of Supplementary Material and graphically in Figure 1. Since the system boundary includes the power system only, the normalization is based on the weight of the engines, *i.e.*, 3.2 ton for a diesel electrical and 4 ton for a diesel mechanical, and the weight of the batteries (3.5 ton). The last paper of this research group (Wang et al., 2018b) extended the application of the LCA to investigate the economic and environmental assessment of the ship hull maintenance, providing a useful tool to determine an optimal maintenance strategy for ship operators. The authors claimed that a poorly maintained hull surface may increase the hull resistance, thereby fuel consumption. According to the authors, a poorly maintained hull surface could increase hull resistance and hence fuel consumption. Their

LCA model embedded four phases based on the ship's life span: shipbuilding (hull construction and machinery installation), operation (service activity and fuel consumption), five maintenance strategies related only to the ship hull and scrapping (steel recycling and disposal). Based on the ship's lifespan, their LCA model included four stages: shipbuilding (hull construction and machinery installation), operation (service activity and fuel consumption), five ship hull-specific maintenance plans, and scrapping through steel recycling and disposal. The results showed that, although the operators adopted a five-year re-coating interval, the re-coating time should be reduced to once a year, resulting in decreased fuel use and emissions. Among the available impact categories, the carbon footprint (assessed using different LCIA methods such as CML-IA, ReCiPe, TRACI and ILCD), was chosen to represent the environmental burdens. The functional unit was not clearly defined but a short route ferry, which regularly serves in Scotland, was selected as a case study. Although the functional unit was not clearly defined, a short-distance ferry that frequently travels across Scotland was chosen as the subject of the case study. Thus, it is possible to consider as a functional unit, "the construction, operation, maintenance, and scrapping of a short route ferry with a lifespan of 30 years". Primary data was calculated by using ad-hoc equations for the estimation of the steel weight necessary required for the ship hull structure and the wet surface area for the quantity of anti-fouling coating. GaBi database was used to retrieve secondary data. For the estimation of the steel weight required for the ship hull construction and the wet surface area for the quantity of anti-fouling coating, primary data were calculated using ad-hoc equations, using Gabi as secondary data source. The LCA analysis was coupled with life cycle cost assessment to support the decision-making process of the ship owner. Since the scores calculated using the different LCIA methods are mostly equivalent and the results for each life cycle phase are not appreciable due to their different order of magnitude, the outcomes of the assessment have been reported in terms of inventory data (CO₂ emissions) in Table S.1 of the Supplementary Material and graphically in Figure 1.

In their study, Cucinotta et al. (2021) performed a comparative LCA of two propulsion systems on a cruise ferry, *i.e.*, a standard Diesel machinery system and Liquefied Natural Gas (LNG) one, as shown in Table 2. The two configurations have been analysed using the impact categories belonging to ILCD 2018 method in a cradle-to-grave perspective, including shipbuilding materials and activities (in terms of hull, outfitting and machinery), operational phase for 25 years on a regular route and dismantling of the vessels. During end-of-life activities, all the recyclable materials are partially or entirely reused or refurbished, while non-recyclable materials are landfilled. The maintenance phase has not been considered as it is generally less burdensome in comparison to the other phases and it does not vary between vessel configurations. Theecoinvent European market data has been used to describe the fuels supply chain. Both ecoinvent data uncertainty and final result sensitivity have been performed. The former exploited the ecoinvent data quality system, while the latter dealt with variations in fuel consumptions and steel loss during the shipbuilding activities. Since the variation of propulsion has not significant influence on the overall vessel configuration, the functional unit chosen is "one ship during its lifetime". As a general result, the LNG propulsion achieved better performance among the majority of impact categories. In particular, LNG-fuelled ship exhibits better results on resource depletion and, generally, on human health, which is strongly influenced by HFO extraction, refining and combustion. However, climate change score is strongly influenced by the processes of natural gas liquefaction, transport and evaporation (due to compression, refrigeration, emission of Volatile Organic Compounds - VOC and methane leakage) as well as by the phenomenon of methane slip, which increase the CO₂-equivalent effect. Moreover, the authors identified a critical activity releasing massive methane emission, *i.e.*, the five-year dry-docking operations when the LNG fuel tanks must be completely emptied, gas freed and filled with air. The most burdensome life cycle phase is the operational one, while the contribution from shipbuilding is more relevant for the LNG ship than for the diesel one, particularly for human health issues. The LNG Otto cycle engines revealed as a valid alternative in terms of emission reduction, as long as methane leakage and liquefaction energy consumption are below a certain limit. As a consequence, LNG-fuelled ship shifts the impact generation on the methane supply chain, delocalizing the

emission that used to be mostly produced during fuel combustion. Moreover, a relevant reduction of the emission of SO_x, NO_x and **Particulate Matter (PM)** can be achieved, allowing the navigation within the Emission Control Areas set up by the International Maritime Organization. The original and normalized results of the assessment are shown in Table S.1 of Supplementary Material and graphically in Figure 1 for GHG-related impact categories.

Table 2: Cruise and Ferry Boats' features of the available LCA studies.

Type	Passenger ferry	Passenger ferry	RoPax Ship	Ferry boat	MV Hallaig RoPax Ferry	Cruise ferry
Source	(Tchertchian et al., 2013)	(Tchertchian et al., 2016)	(Blanco-Davis et al., 2014)	(Pommier et al., 2016)	(Jeong et al., 2018; Wang et al., 2018a, 2018b)	(Cucinotta et al., 2021)
Production site	N.A.	N.A.	N.A.	France	UK	Denmark
Production year	N.A.	N.A.	2001	2012	2012	2012
Operation location	France	France	Atlantic Ocean	France	UK	Norway
Estimated lifetime [year]	20	20	25	30-100	30	25
Service speed [knots]	12	12	25	N.A.	9	20.5
Mass Displacement [ton]	N.A.	25.5-27.8	20,150	20.5-23.4	235	15,199-15,309
Deadweight (DWT) [ton]	N.A.	9.4-11.5	6,515	1.6-4.5	135	3,551
Lightship weight (LWT) [ton]	20-40	16.1-16.7	13,635	16-21.7	100	11,648-11,758
Main engine power [kW]**	2x(150-350)DM* 2x(20-150)DE*	2x(70-80)DM* 2x(22-24)DE*	4x12,000 DM*	N.A.	2x450 DM* 3x360 DE*	4x5,600 DM* 4x5,250 LNG*
Auxiliary engine power [kW]	40-250	10	N.A.	N.A.	N.A.	N.A.
Fuel type	Diesel/Elec	Diesel/Elec	HFO	Diesel/Elec	MDO/Elec	HFO or LNG
Passenger capacity	96	100	N.A.	60	150	1,500
Single trips	24/day	23-24/day	150/yr	N.A.	6,260/yr	175/yr
Average distance travelled by passenger [km]	13.89	13.89	1,037.12	N.A.	5.1	1,426

*DM= Diesel Mechanical, DE=Diesel Electrical, LNG= Liquefied Natural Gas

**If more than one engine was present, the number of engines was specified, along with the specific engines power

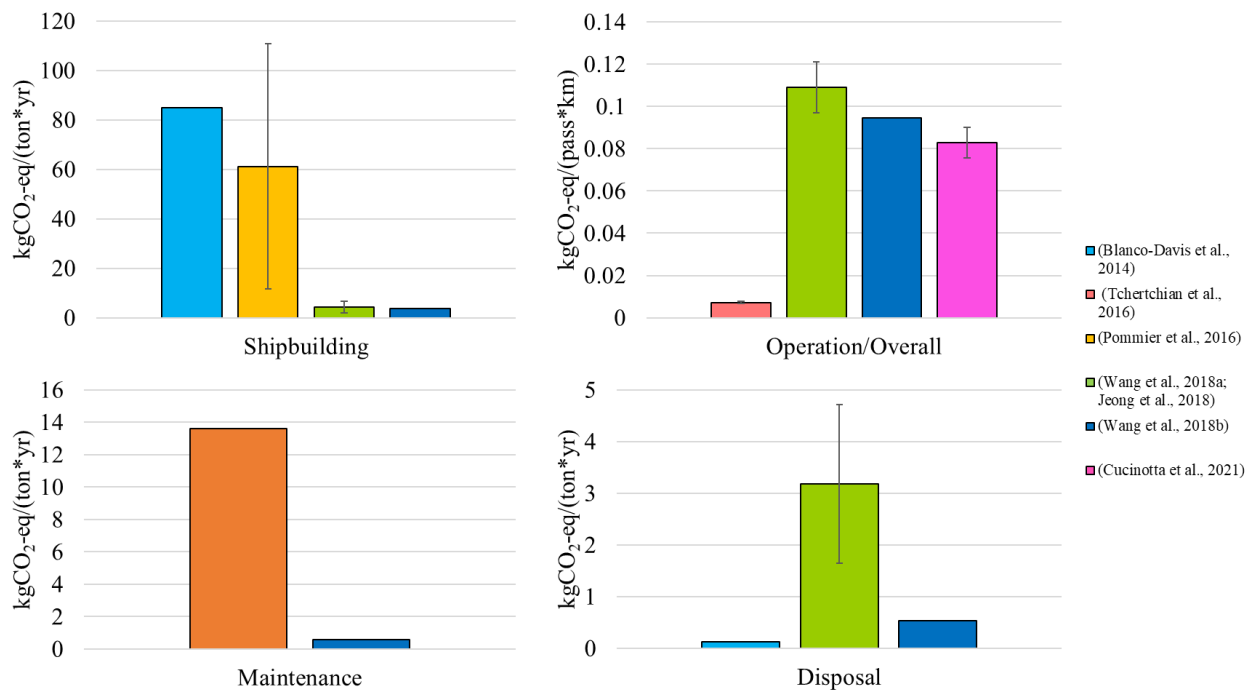


Figure 1: GHG-related normalized scores for Cruise and Ferry Boats. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports **between** life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. In general, shipbuilding activities related to vessels' structures manufacturing generate GHG emission in the order of 10^1 - 10^2 kgCO₂-eq normalized on LWT and lifetime, while operational activities emit 10^{-2} - 10^{-1} kgCO₂-eq for each passenger transported for 1 km. The former is mostly influenced by the materials used in hull construction, whilst the latter is highly variable owing to the length of trips and the vessel's passenger capacity.

3.1.2. Tankers

Tanker vessels are mainly used in the oil industry to carry either crude oil from oil fields to refineries or petroleum products such as gasoline, diesel fuel, fuel oil, or petrochemical feedstock from refineries to distribution centres. Major types of tankships include the oil tanker, the chemical tanker, and gas carrier, which are gathered under 49312 CPC code. Tankers vary in size from small coastal vessels about 60 metres (200 feet) long, carrying from 1,500 to 2,000 DWT, up to huge vessels that reach lengths of more than 400 metres (1,300 feet), carrying as much as 550,000 DWT. **Besides ocean- or sea-going tankers there are also specialized inland-waterway tankers which operate on rivers and canals with an average cargo capacity up to some thousand tons.** In addition to tankers that navigate on the ocean or the sea, there are also specialized inland-waterway tankers that travel on rivers and canals and have an average cargo capacity of up to a few thousand tons.

In order to obtain a standard reference unit to normalize the environmental impacts of the operational phase for different vessel types, three parameters are recommended for this purpose: the cargo capacity [ton], the covered distance of single trips expressed in kilometres [km] and the number of **full** trips (unitless [#]) performed during the timespan under investigation, as shown in Eq.(3) of Table 1. It is worth noticing that cargo capacity is commonly expressed using the deadweight tonnage (DWT), even though the payload capacity is a more accurate parameter than DWT. However, payload capacity is not always available and it does not differ too much from the DWT, which is then recommended. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary Materials.

Despite the large variety of sizes, the main focus of the available scientific literature dealing with LCA studies on tankers refers to the air emission (*i.e.*, GHG) of the extraction, processing and combustion of traditional or alternative marine fuels. Among the six published documents related to tanker vessels themselves, (Bicer and Dincer, 2018b, 2018a; Chatzinikolaou and Ventikos, 2015; Kjær et al., 2015; Nian and Yuan, 2017; Quang et al., 2021). The operational phase is the most impactful activity for this type of vessel due to the engine fuel combustion, which is necessary to transfer the cargo from one site to another. The operating phase of tanker vessels, which is covered in six published publications about tanker vessels themselves (Bicer and Dincer, 2018b, 2018a; Chatzinikolaou and Ventikos, 2015; Kjær et al., 2015; Nian and Yuan, 2017; Quang et al., 2021), shows the greatest impact because it involves burning engine fuel to move cargo from one location to another. As a common outcome, the use of alternative fuels than MDO and HFO (*e.g.*, LNG) seems beneficial in the reduction of GHG emissions leading to a more sustainable path in this field. As a frequent result, using alternative fuels to MDO and HFO (such as LNG) appears to be helpful in lowering GHG emissions, leading to a more sustainable approach in this field. So far, no comparison of different tankships has been published, nor has a benchmark for this CPC category been established for further research and decision-making strategies.

Concerning LCA studies, the work proposed The study published by Kjær et al. (2015) adopted the environmental input-output model to investigate how LCA and life cycle costing (LCC) LCC can be integrated by using the same financial-inventory data for medium range tankers operating worldwide. Tanker's features are provided in Table 3. System boundaries were defined with a cradle-to-grave perspective, including shipbuilding activities, ship operations, maintenance, and ship scrapping. The functional unit was defined as "one average year of ship transport service" and the reference flow was set as "the total amount of t-km per average year", with the subsequent option of expressing the results per t-km. The overall impacts across the whole life cycle can be obtained considering the useful life of this tanker lifetime of 20 years. Primary data from different sources (*i.e.*, shipyard, literature, shipping routes) were integrated with background data, *i.e.*, Economic Input-Output (EIO) database from FORWAST project (Villeneuve, 2007), and results were reported in terms of CO₂-eq for LCA part and USD for LCC part. The Economic Input-Output (EIO) database from the FORWAST project (Villeneuve, 2007) was combined with primary data from various sources (such as shipyards, literature, and shipping routes) as background information. The results were given in terms of CO₂-eq for the environmental standpoint and USD for the life cycle costing. Results were calculated based on the functional unit and considering the total amount of t-km per average year (2.87 billion of t-km yearly per average year) and the GHG emissions per average year (32 million of ton CO₂-eq), as shown in Figure 2 and Table S.2 of Supplementary Material. As shown in Figure 2 and Table S.2 of the Supplementary Material, the results were calculated using the total number of t-km yearly (2.87 billion t-km) and the annual GHG emissions (32 million ton CO₂-eq). The normalization procedure described in this study is not-applicable to the assessment outcomes since no further information about the trips or the distance travelled in a single trip is supplied.

The work proposed by Chatzinikolaou and Ventikos (2015) aims to model and examine the air emissions of an ocean-going ship in a life cycle perspective, creating an adequate and reliable life cycle emissions inventory. A case study referring to a Panamax tanker is reported and the tanker's features are provided in Table 3. System boundaries were defined with a cradle-to-grave perspective, including shipbuilding activities (limited to hull and machinery production), ship operation, maintenance, and ship scrapping dismantling. (dismantling). In this case, although the analysis was performed under the LCA framework, the functional unit was not defined since the examination of life cycle impacts of vessel emissions is not included within the scope of this paper. However, the functional unit can be considered assumed as "the construction, maintenance, operation and disposal of a tanker for a period of 25 years". Primary data from different sources (*i.e.*, shipyard, literature, shipping routes) were managed by using ad-hoc equations. Primary data were integrated with background data using EX-TREMIS DB for the estimation of emission factors of CO, PM, and CH₄ for operational phase. The results in terms of air emissions of both GHG CO₂ and pollutants (*i.e.*, CO₂, CO,

~~CH₄, NO_x, PM₁₀, SO₂, and VOC~~) are displayed graphically in Figure 2 and numerically in Table S.2 of Supplementary Material.

The same vessel (Panamax tanker) with an analogous operational profile was analysed by Quang et al. (2021). Vessel features described in this work are provided in Table 3. System boundaries were defined with a cradle-to-grave perspective: from raw material extraction stage to the ship's end-of-life (including shipbuilding, ship operation, maintenance, ship's disposal, and material transportation activities). The functional unit was defined as "one oil tanker with a deadweight of 74,296 ton for the transportation of crude oil by sea over its 25-year lifetime" and the reference flow is the Panamax oil tanker itself. Primary data from different sources (i.e., shipyard, literature) were integrated with background data from GaBi. Results are displayed following the CML-IA LCIA method, comprehending numerous impact categories. The results of the two works (Chatzinikolaou and Ventikos, 2015; Quang et al., 2021) performed on the same vessel (Panamax tanker) are reported in Figure 2 and in Table S.2 of Supplementary Material. Due to the use of different units of measure (kgCO₂ vs. kgCO₂-eq), there is a substantial difference between the works, which reflects the use of CML-IA LCIA method in the evaluation of CML-GWP, comprehending other GHG emissions (i.e., CH₄, HCFC, etc.). Moreover, the work of Quang et al. (2021) adopted a different allocation approach, accounting for environmental benefits from material recycling at the End of Life (EoL) EoL phase, in contrast with the work of Chatzinikolaou and Ventikos (2015).

Referring to the work of Nian and Yuan (2017), ~~the authors' goal was to implement a LCA approach for examining systems providing services in maritime transport (i.e., crude oil transport by mean of tankers), the authors' objective was to use an LCA approach to evaluate systems offering services in maritime transportation (i.e., crude oil transport by mean of tankers).~~ The paper investigated eleven oil routes that encompassed five different tanker types: (i) Panamax, (ii) Aframax, (iii) Suezmax, (iv) very large crude carrier – VLCC, and (v) ultra large crude carrier – ULCC (Table 3). System boundaries were defined with a cradle-to-grave perspective, including shipbuilding activities (in terms of energy consumption for one tonne of LWT), ship operation, maintenance, and ship scrapping (materials recycling). ~~The functional unit was not clearly declared within the paper, even if the authors recommended the establishment of a new benchmark following the physical unit of kgCO₂/t-km for maritime energy efficiency improvement and decarbonization. Even though the authors suggested creating a new benchmark for maritime energy efficiency improvement and decarbonization based on the physical unit of kgCO₂/t-km, the functional unit was not explicitly established within the research.~~ Primary data from different sources (i.e., Chinese shipyard, shipping routes, etc.) were managed by using ad-hoc equations and results are reported in terms of direct CO₂ emissions. The normalization process of the functional unit was performed in this case by considering the overall cargo transported in a round trip by the tanker (considering the DWT) and the overall distance (km) travelled in a year, which has been calculated using the single trip distance times the number of annual trips. The approach is consistent, in its basis, with the one proposed in this review. However, no information is provided regarding trips and the distance covered in empty/full mode (see Figure 2 and Table S.2 of Supplementary Material).

As indicated in Table 3, two articles by Bicer and Dincer (2018a, 2018b) studied the environmental implications of alternative carbon-free fuels (hydrogen and ammonia) vs traditional heavy fuel oil HFO for the operating activities of a freight vessel and a tanker. The system boundary included the vessel production, operation and maintenance, the lifecycle of the fuels, and the construction, and the activities and dismantling of two ports. ~~The vessel engines under consideration were dual-fuel engines in which a portion of the HFO was completely or partially (50/50) replaced by hydrogen or ammonia.~~ The vessel engines under consideration were dual-fuel engines with hydrogen or ammonia replacing some HFO, either totally or partially (50/50). Green hydrogen produced by water electrolysis and ammonia obtained through the Haber-Bosch process have been employed by both studies. The two works differ in terms of the energy source used to produce the fuels, which is either biomass, geothermal and municipal waste energy (Bicer and Dincer, 2018a) or wind and hydropower (Bicer and Dincer, 2018b). Both studies used "the transportation of 1 tonne

of cargo for 1 km” as a functional unit to analyse the environmental consequences of shipping activities, allowing for simple comparison with other assessments. Power ratings and energy consumption were computed using GREET software based on travel scenarios, and life cycle inventories were acquired using ecoinvent v3.3 as well as scientific literature. Based on trip scenarios, the GREET software was used to calculate power ratings and energy consumption, and the ecoinvent was used to collect life cycle inventory. Whilst the authors identified the processes that contributed the most to each impact category, they did not go into depth about the life cycle inventory or the contributions of each life cycle stage to the final outcomes. Although the authors identified the processes that mostly affected each impact category, they did not go into detail regarding the life cycle inventory or how each life cycle stage contributed to the final results. This lack of information makes it very difficult to replicate/recreate the product system, which is something that should be avoided for the purpose/sake of clarity. Among the two authors’ publications, twenty-one potential scenarios were studied based on different combinations of fuels and supply chains. Due to their greater energy consumption rate per ton-km, transoceanic freight ships exhibited higher impact values than tankers. Hydrogen derived from hydropower, geothermal, and municipal solid waste sources performed best as a standalone fuel, with the lowest environmental impacts for Marine Sediment EcoToxicity Potential (MSETP), Marine EcoToxicity Potential (METP), GWP, AP, Abiotic Depletion of Elements (ADE) and Ozone Depletion Potential (ODP). CML-MSETP, CML-METP, CML-GWP, CML-AP, CML-ADE and CML-ODP. The use of ammonia as a dual fuel with HFO improves the outcomes by roughly 25-50% in every impact category, whereas the use of hydrogen in conjunction with HFO reduces impacts by about 35-60%. Notwithstanding the apparent benefits, a few concerns about the use of hydrogen and ammonia in marine transport arise due to the safe storage and management of these products. Despite the apparent advantages, some issues with the safe management and storage of hydrogen and ammonia (to a less extent) in sea transport remain. Despite the fact that ammonia transportation and storage are now in place, there are still challenges with hydrogen management on board. The results have already been normalized by the authors based on the total distance travelled by the ship during its service lifetime (3,920,000 km) and the deadweight of the freight ship of 100,000 ton. However, since tankers are commonly used to carry cargo on outward routes only, it is recommended using a normalization process based on the distance covered by the vessel while executing its cargo-carrying duty, which is half of the total distance given. The original outcomes for GHG-related impacts are reported in Table S.2 of Supplementary Material, along with the normalized ones, which are also showed graphically in Figure 2.

Table 3: Tankers’ features of the available LCA studies

Type	Medium range tanker	Panamax tanker	Five categories of tankers (Panamax, Aframax, Suezmax, VLCC, and ULCC)	Tanker
Source	(Kjær et al., 2015)	(Chatzinikolaou and Ventikos, 2015; Quang et al., 2021)	(Nian and Yuan, 2017)	(Bicer and Dincer, 2018a, 2018b)
Production site	China	South Korea	China	N.A.
Production year	2008	2009	2015	N.A.
Operation location	worldwide	worldwide	worldwide	worldwide
Estimated lifetime [year]	20	25	30	25
Service speed [knots]	14	14	8-15	18
Mass Displacement [ton]	61,000	88,300	N.A.	N.A.
Deadweight (DWT) [ton]	50,000	74,300	85,000 - 560,000	100,000
Lightship weight (LWT)[ton]	11,000	14,000	N.A.	N.A.
Main engine power [kW]*	N.A.	2x12,240	12,200 - 42,200	15,000

Auxiliary engine power [kW]*	N.A.	4x740	2,800 - 5,800	2,850
Fuel type	MGO, HFO, LSHFO	HFO	IFO	HFO, H2, NH3
Single Trips	N.A.	19-22/year	N.A.	1/lifetime
Average distance travelled by cargo [km]	N.A.	2,800 (estimated)	2,380-20,302	3,920,00

*If more than one engine was present, the number of engines was specified, along with the specific engines power

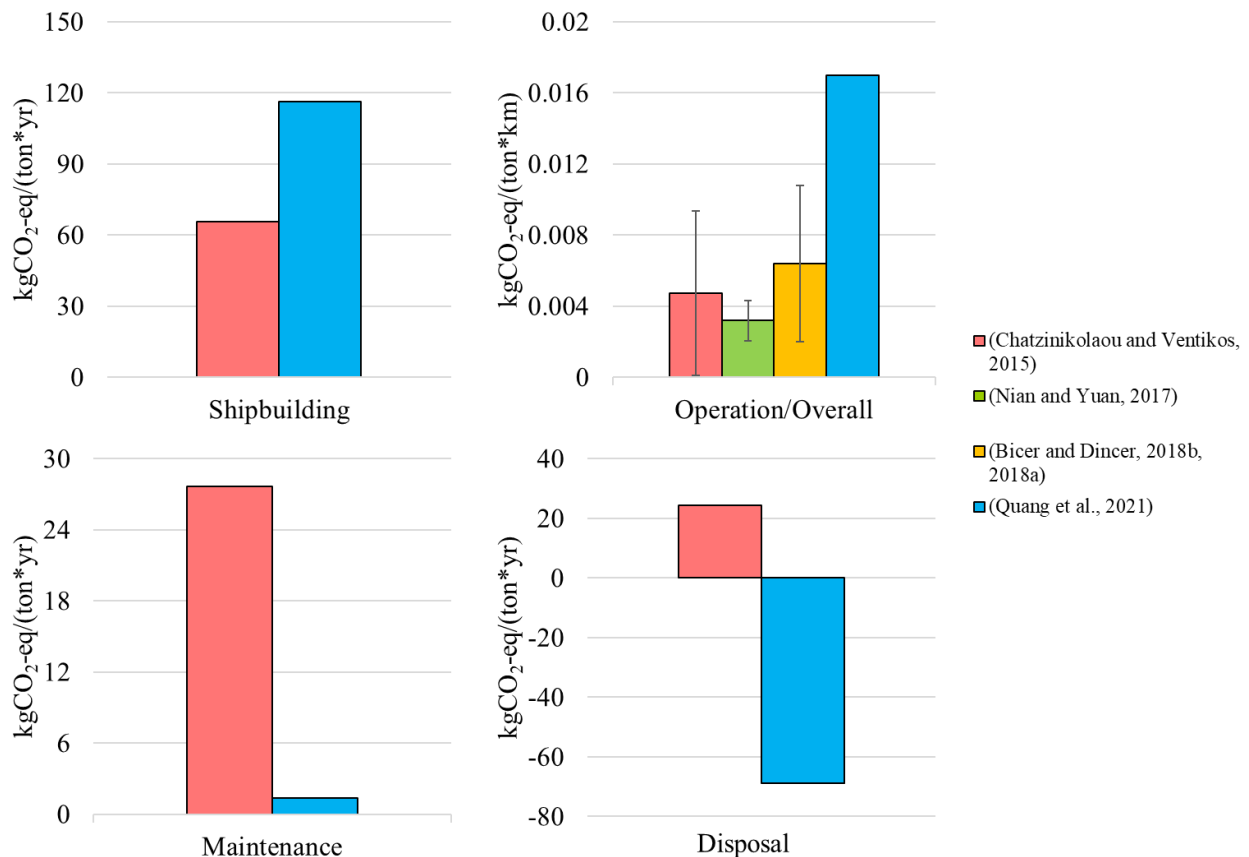


Figure 2: GHG-related normalized scores for Tankers. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports of life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. As general outcome for tankers, the shipbuilding activities related to the main structures (*i.e.*, hulls and machinery) generate GHG emission in the order of 10^1 - 10^2 kgCO₂-eq, normalized on LWT and lifetime. For this kind of vessel, the main material used for hull construction is carbon steel and the variability of results based on LWT is limited. On the other hand, operational activities are responsible of approx. 10^{-2} - 10^{-3} kgCO₂-eq for each ton of fuel transported for 1 km. The operational phase is mainly affected by the distance covered during a trip and the possibility to carry fuels during the return trip, too. The end-of-life phase shows high variability (in a range 10^{-1} - 10^2 kgCO₂-eq normalized on LWT and lifetime) due to different allocation approaches.

The outcomes of LCA studies dealing with tankers exhibit how the use phase is responsible of the highest impact along the overall life cycle. In particular, the operational phase accounts for 79% (Kjær et al., 2015), 96% (Chatzinikolaou and Ventikos, 2015), 91% (Nian and Yuan, 2017) and 99% (Quang et al., 2021) of the

overall GHG emissions. In terms of impact generation, the operational phase is followed by the ship production, the port and transit service, other operational activities (loading/unloading) and the maintenance activities. Results are in accordance with the other studies previously discussed, supporting the general outcome in the transportation sector which highlights how the highest impact is generated during the operational phase. However, it is worth noticing that these findings need to be taken with caution, due to inconsistencies among the works regarding allocation approach, system boundary and functional units.

3.1.3. Cargo vessels

A cargo ship, often known as a freighter, is a merchant ship that transports commodities, minerals, and cargo from one port to another. Cargo vessels are normally custom-built for their purpose, including cranes and other loading and unloading gear, and exist in a variety of sizes and cargo capacity which are often identified by peculiar names (Suezmax, Q-max, Chinamax, Panamax, Seawaymax, etc.). They are generally built of welded steel nowadays, and they typically last 25 to 30 years before being dismantled, with a few exceptions. They can be classified into various categories based on the sort of cargo they transport. This section deals with the cargo ships classified under the 49314 CPC code "*Other vessels for the transport of goods and other vessels for the transport of both persons and goods*": (i) general freight ships transporting packaged goods such as consumer products and vehicles, (ii) container ships carrying their cargo within truck-size intermodal containers, (iii) dry bulk carriers shipping grain, ore, coal and other pellet-size products in loose form, (iv) Roll-on/roll-off (RoRo) ships transporting wheeled cargo that is driven on and off the ship on its own wheels, such as cars, trucks, semi-trailer vehicles, trailers, and train cars.

The normalization approach calls for the introduction of three normalization factors, as one of the purposes of this study is to unify the environmental outcomes associated with the operational phase of vessels on a consistent basis. Three parameters are required by the normalization approach: (i) the cargo transported by the vessel expressed in tonnage [ton], the weighted average shipping distance of the cargo expressed in kilometres [km] and the number of full trips performed during the considered time span ([#], unitless), as shown in Eq.(5) of Table 1. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary Materials.

Plenty of scientific publications focus their assessment on the operational phase only, including exclusively the fuel supply chain within the system boundary (WTW analyses). These contributions have not been taken into account, resulting in twelve publications analysed in this section.

The first included contribution by Gratsos et al. (2010) assessed the carbon footprint of the manufacturing, operation and disassembly of two distinct cargo ship hulls (Panamax and Handymax), each with different corrosion margins, i.e., peculiar and distinctive LWT. Previous works A previous work by the same research group (Gratsos and Zachariadis, 2005) indicated that ships built with corrosion allowances adequate suitable for the ship's design lifetime exhibits a lower overall reduced total cost, despite the fact even though that they would carry a somewhat lower amount of little less cargo. A comparison based on lifetime CO₂ emission required a reasonable functional unit definition in order to guarantee the same transport service by ships with different expected lifetime (20 and 30 years). Since the various product systems have unequal payloads, different operating days per year and same speed, the authors decided to equalize the annual cargo*distance (ton-km) adjusting the number of available ships in the fleet for a total period of 60 years, which is the least common multiple between the ships lifetimes, in order to define a functional unit. First to introduce the actual capacity utilization of the ship, the authors estimated that the ships transport cargo about 65% of sea time (due to possible route optimization), while 35% of sea time the ships are on ballast. Their findings showed that lighter ships have superior life cycle environmental performance when CO₂ emissions exclusively generated from fuel burnt over the ship's lifetime operation are taken into account. However, additional CO₂ emissions are generated due to activities related to steel production (excluding raw materials extraction), shipbuilding activities, maintenance practice, recycling technologies and transport of raw materials. Therefore, in terms of total carbon footprint, more robust ships revealed more environmentally friendly due

to larger corrosion margins, which result in fewer steel replacements and idle days. Following the normalization procedure pursued by this review, the DWT (instead of the payload) and a utilization factor of 50% (instead of 65%) have been employed to keep the normalization method consistent, which means that return trips are done on ballast and have the same length as direct journeys.

Ling-Chin and Roskilly published a series of articles dealing with the estimation of the environmental impacts of a hybrid system on-board of a RoRo cargo ship, *i.e.*, a diesel generator (acting as prime movers) assisted by photovoltaic modules, lithium-ion battery systems and a cold-ironing facility. In their first publication (Ling-Chin and Roskilly, 2016a), the authors investigated whether the refitting of the power system on-board of a RoRo cargo ship would be advantageous in terms of resource consumption and environmental burdens. Therefore, they investigated the possibility of replacing a conventional diesel generator with a hybrid system after 10 years of operation of the same RoRo cargo ship travelling on regular routes over a lifespan of 30 years. System boundaries comprehended energy and materials supply, manufacturing of the hybrid system, operational and maintenance activities and recycling processes, which are presented in detail for metallic scraps. The functional unit was defined as *“the operation of the hybrid power system implemented on-board a RoRo cargo ship travelling on regular routes within ECAs over a lifespan of 30 years”*. The characterization of the environmental burdens through impact categories (CML-IA, ILCD, EI99) showed that most of the environmental footprint is generated during operation and end of life phases, in which ecotoxicity potential reveals as the most significant impact. Sensitivity analyses have been employed to verify double-check the environmental benefits of the retrofit plant, exhibiting showing a significant reduction in the consumption of marine diesel oil (MDO) consumption and in the scores of CML-GWP, CML-Human Toxicity Potential (HTP), CML-AP, CML-Eutrophication Potential (EP), CML-EcoToxicity Potential (ETP), as a result of increasing the rate of recycling or landfilling at the end of life. The same authors published another extensive work (Ling-Chin and Roskilly, 2016b), providing a detailed inventory of the hybrid system raw materials and manufacturing processes, using technical reports, expert judgement and textbook as sources of information. Even though the power system configurations are different in comparison with the previous work, the system boundaries have not been modified, as well as the functional unit. The authors provided an accurate life cycle inventory, enabling other practitioners to straightforwardly replicate their results using several impact assessment methods (CML-IA, ILCD, EI99). The authors then compared the performance of the hybrid system with a “business as usual” diesel mechanical power system aiming at justifying the environmental benefits of the novel technology. It was found that throughout the lifespan, the hybrid system shows a higher environmental footprint in terms of ecotoxicity potential and abiotic depletion of fossil fuels. This is mainly due to the larger amount of metal constituting the hybrid system, whose manufacturing and disposal processes were responsible for the drop of the environmental performances. However, taking all impact categories into account, the hybrid system provided an overall improvement of the environmental performance in comparison with the conventional marine power system. In fact, the reduction by 1 or less order of magnitude for twenty impact categories is perceived by the authors to prevail on the same magnitude increase for the other six impact categories. A linear correlation between LCIA results and increment (or decrease) has been identified for fuel-related impact categories, while a higher impact on ecotoxicity was mainly related to disposing scrap to incineration plants. The conventional plant, the retrofit plant and a new-build all-electric system have been compared in a following paper by the same authors (Ling-Chin and Roskilly, 2016c). They built up a bottom-up integrated approach to model each power system as a composition of peculiar components, whose life cycle inventory has been studied in detail. Their findings confirmed that environmental footprint on various natural compartments is generally reduced by the installation of the new-build all-electric system when compared to the retrofit system, which in turn exhibits improved performances than conventional systems. Basically, the installation of advanced marine power systems demands more resources for manufacturing and disposal, although consuming less fuel and releasing less emissions during navigation. Since the operational phase is the most burdensome activity throughout the life cycle of the power system, this results in a general reduction in most impact categories

at the expense of a few. The information related to the vessels analysed in the works just presented are reported in Table 4, while the outcomes are displayed graphically in Figure 3 and numerically in Table S.4 of Supplementary Material.

The first complete life cycle analysis of a container vessel hull has been published by Gilbert et al. (2017), whose aim was to explore the CO₂ implications of introducing reusing/recycling practice in the shipbuilding sector. The authors defined the functional unit as “two hulls used for a duration of 26 years each”. Three scenarios have been developed, each one characterized by a different amount of primary steel used for the second hull, *i.e.*, i) 100% primary metal (Business As Usual - BAU), ii) 100% secondary metal from previous hull, iii) 50% secondary steel from previous hull and 50% primary metal. System boundaries included exclusively shipbuilding activities related to steel hull manufacturing, such as raw material supply, hull manufacture, ship assembly, maintenance and end-of-life treatment processes. The impact assessment exhibits a CO₂ emission reduction of approximately 29% for a complete reuse of the first hull (scenario (ii)) and a decrease of CO₂ emission of roughly 10% for a 50% reuse of first hull (scenario (iii)), both in comparison with BAU. This is not surprising, as scenarios (ii) and (iii) cut down the usage of burdensome primary metal, yielding substantial savings in terms of CO₂ emissions. Although the potential CO₂ emissions related to maintenance and transportation may increase to enable higher levels of reuse and/or remanufacture, they are likely to be negligible if compared to the primary metal supply required by the BAU scenario. ~~The major limitations of the work are the lack of a wide overview given by well-established environmental impact methods and the missing information about the operational activities of the ship, which prevents the comparison with other complete life cycle assessments available in the literature.~~ The work's primary shortcomings include the lack of a comprehensive overview provided by well-recognized environmental impact methodologies and the absence of data regarding the ship's operational activities, which precludes comparison with other thorough life cycle assessments available in the literature. ~~To make the data helpful for future research, the calculated CO₂ emissions were normalized on a LWT of 55000 tons and a lifetime of 52 years, as shown in Table 4 and Figure 3. This allows for comparisons with similar hulls.~~ Table 4 and Figure 3 show how the calculated CO₂ emissions were normalized using a LWT of 55000 tons and a lifetime of 52 years to make the results useful for future research.

A following series of publications by Bicer and Dincer (2018a, 2018b) investigated the environmental impacts of alternative carbon-free fuels (hydrogen and ammonia) in comparison with conventional HFO for the operational activities of a freight vessel and a tanker, as shown in Table 4. These works have already been described in section 3.2, where the outcomes related to the LCA of a tanker have been presented. In the freight-related case study, the results have been normalized by the authors based on the total distance travelled by the ship during its service lifetime (2,000,000 km) and the DWT of the freight ship of 40,000 ton. However, since a freight ship usually transports cargo on direct journeys only, a normalization procedure based on the distance travelled by the vessel when performing its function of carrying cargo (which is half of the total distance reported) is recommended. The normalized results for GHG-related impacts are reported graphically in Figure 3 and numerically in Table S.4 of Supplementary Material, along with original scores.

The life cycle assessment of ship engines coupled with a Carbon Capture and Storage (CCS) system to reduce the greenhouse gas emissions from the exhausted gas of a bulk carrier has been carried out by Wang and Zhou (2018). Their goal was to estimate the carbon footprint and the economic implications of introducing a carbon capture and solidification process on-board a bulk carrier, whose characteristics are reported in Table 4Table . The functional unit is not clearly defined, even though it can be assumed that “*the manufacturing, 30-year operation and disposal of a ship engine coupled with a CCS system on a bulk carrier*” has been **used chosen**. Limited information is provided for the operational phase (distance travelled, cargo transported, CCS mass and energy balances are missing), scrapping phase (no materials recovery or treatments) or electricity mix. In fact, looking at the flowchart of the product system, electricity for manufacturing and dismantling seems to be totally generated from wind energy, even though the authors did not justify this assumption in

the text. Nonetheless, the authors developed various scenarios under different carbon reduction targets and determined a higher profit for lower carbon emission due to saving from carbon credits and trading of the final product, *i.e.*, CaCO₃. A further limitation of the work resides on its narrow perspective focused on global warming potential only. Indeed, the inclusion of other impact categories would have depicted a shifting of the environmental burdens from one environmental issue to another, which is a well-known drawback of CCS (Barbera et al., 2022). The GWP results presented in Figure 3 should be used bearing in mind that raw materials extraction and refinement have not been included within the system boundary. Since the paper deals with power system only, the normalization has been performed on the weight of the engine (36 ton), while information regarding the distance travelled was missing.

Tuan and Wei (2019) performed a detailed cradle-to-gate assessment of the production of a Panamax bulk carrier (see Table 4), choosing the functional unit accordingly, *i.e.*, “*the construction of one Panamax bulk carrier for the transportation of coal from Australia to Japan over a 25-year life cycle*”. System boundary included material extraction and production, machinery production, ship hull and machinery construction, sea trials and transportations between the activities. The inventory of each activity is well-described, showing formulas, calculation principles, parameters values and inventory obtained. Secondary data have been retrieved within the GaBi database, while CML-IA environmental impact method has been used. The results highlighted a dominant contribution of raw material extraction and refinement phase, as it generates most of the burdens among all the impact categories (87-100%). Shipbuilding emerged as the second most burdensome activity (2.26-10.50%), followed by sea trials, machinery production and transportation. Sensitivity analyses have been performed aiming at evaluating the effect of assumptions and calculation principles on the impact category scores. As expected, the final values are mostly influenced by the hull weight, which contains the majority of the ship's steel. The final results, as expected, are heavily influenced by the hull weight, which comprises the majority of the ship's steel. Based on these findings, the authors extended their work on another publication (Dong and Cai, 2019), which deals with the eco-design of a Panamax bulk carrier comparing different lightship weights. This work extends the previous publication of Gratsos et al. (2010) introducing the raw materials extraction processes taken from GaBi as well as the holistic approach provided by the CML-IA LCIA method. The outcomes of Gratsos et al.'s assessment indicates that, for a given mass displacement, a lighter vessel maximizes its payload by cutting down the lightship weight. On the other hand, a heavier ship resulting from an increase of the hull thickness guarantees lower steel maintenance replacement and larger corrosion margins. The authors' study compares the environmental performances of these two ship design concepts by using an attributional LCA method, aiming at providing assistance to naval architects during the ship design stage. The functional unit adopted was “*the transport of one ton of bulk cargo over a distance of one km by sea during T years of service (20 or 30 years)*”, which enables a comparison with other works in the field. System boundaries included the entire life cycle of the ships, pursuing a cradle-to-grave perspective. Materials and energy balances are well-described for each activity throughout the whole life cycle of the ship, as well as limitations and assumptions, which are further investigated using sensitivity analyses on GaBi. Their results indicate that the lighter solution would emit more than double VOC, whereas slightly reducing NO_x and SO_x emissions in comparison with heavier ships. Concerning CML-IA environmental indicators, in general they are marginally increased by heavier ships (0.6-2.15%). However, this design yields a decisive improvement in terms of ADE (38.69%), Terrestrial EcoToxicity Potential-TETP (3.60–7.09%), ODP (21.29–21.58%), and METP (18.29–19.74%), justifying the authors' claim of better environmental performance for more massive ships. Their findings relied on a drop of maintenance material replacements, energy consumption, and emissions from the life cycle of the heavier ship, excluding the operational phase. This paper might be used as a benchmark for future studies on cargo vessels, thanks to the adoption of a suitable functional unit, the quality of the information provided and the assumptions transparency, which have been investigated through sensitivity analyses. In this review, the score normalization step employed the peculiar payloads of the vessels (70,700-71,500 ton) instead of the DWT, due to the essential role of this parameter to distinguish the different vessel features in this work. This

research group further examined the environmental performance of a Panamax bulk carrier from an energy efficiency viewpoint (Dong and Cai, 2020). Energy efficiency technologies, such as air-lubrication systems or installation of solar panels, may decisively decrease life cycle emissions of ships, since the operational phase is commonly the most burdensome life cycle phase. However, the installation of additional systems raises the lightship weight, increasing the emissions from production and maintenance phases, while reducing the vessel payload. Numerous scenarios have been developed by the authors, using CML-IA method to evaluate both fuels savings (0-20%) and LWT increment (0-20%) simultaneously, avoiding the introduction of any specific energy optimization technology. The functional unit is “the transport of one ton of bulk cargo over one km by sea over a 20-year service life”, whereas the system boundaries include raw material extraction and production, shipbuilding activities, operation and maintenance. The assessment's main conclusions are dual: a significant reduction of environmental impacts (except ADE) is gained by fuel savings, while several scenarios are more burdensome than the base case due to the increase in the lightship weight. A cradle-to-grave study published by the same research group concluded the series of group’s publications presenting a Korean bulk carrier LCA (Quang et al., 2020) from different perspectives. The vessel under study was the same as in Gratsos et al.’s work (Gratsos et al., 2010), where more detailed information about assumptions and data source can be retrieved. The focus of this study is on GHG emissions only, limiting the analysis on GWP impact category of CML-IA. Since the work lacks information for reproducibility of the results (e.g., supply chains of materials, electricity mix, detailed inventory), the GWP result is not free of criticism. In accordance with other works, the operational phase is revealed as the most burdensome activity.

Table 4: Cargo vessels’ features of the available LCA studies

Type	Panamax bulk carrier	Handymax bulk carrier	Panamax bulk carrier	RoRo Cargo ship		Container vessel	Freight ship	Bulk carrier	Panamax Bulk Carrier
Source	(Gratsos et al., 2010)		(Dong and Cai, 2020, 2019; Quang et al., 2020)	(Ling-Chin and Roskilly, 2016a, 2016c)	(Ling-Chin and Roskilly, 2016b, 2016c)	(Gilbert et al., 2017)	(Bicer and Dincer, 2018a, 2018b)	(Wang and Zhou, 2018)	(Tuan and Wei, 2019)
Production site	N.A.		Singapore	Denmark		N.A.	N.A.	N.A.	Japan
Production year	N.A.		2004	2004		N.A.	N.A.	N.A.	2004
Operation location	World		World	Europe		N.A.	World	World	World
Estimated lifetime [year]	20-30		20-30	10-30	30	2x26	25	30	25
Service speed [knots]	13.3		13.3	15-17		N.A.	18	N.A.	15.5
Mass Displacement [ton]	84,400	54,600	84,400	22,398		N.A.	N.A.	N.A.	88,248
Deadweight (DWT) [ton]	72,200-73,000	45,900 - 46,513	72,200-73,000	12,350		N.A.	51,500	157,500	76,300
Lightship weight (LWT) [ton]	11,400 - 12,200	8,087 - 8,700	11,400 - 12,200	10,048		55,000	N.A.	N.A.	11,948
Main engine power [kW]*	N.A.		8,830	4x5,760	2x5,000 1x4,000 1x3,000 1x2,000 1x1,000	N.A.	37,500	18,660	8,830
Auxiliary engine power [kW]*	N.A.		N.A.	2x1,563	N.A.	N.A.	8,300	N.A.	3x420
Fuel type	HFO		LSHFO	MDO, HFO	MDO	N.A.	HFO, H ₂ , NH ₃	HFO	HFO
Single Trips	1/yr	1/yr	1/yr	300/yr	300/yr	N.A.	1/lifetime	N.A.	N.A.
Average shipping distance [km]	145,248 - 148,558	146,075 - 148,972	145,248 - 148,558	209	209	N.A.	2,000,000	N.A.	N.A.

*If more than one engine was present, the number of engines was specified, along with the specific engines power

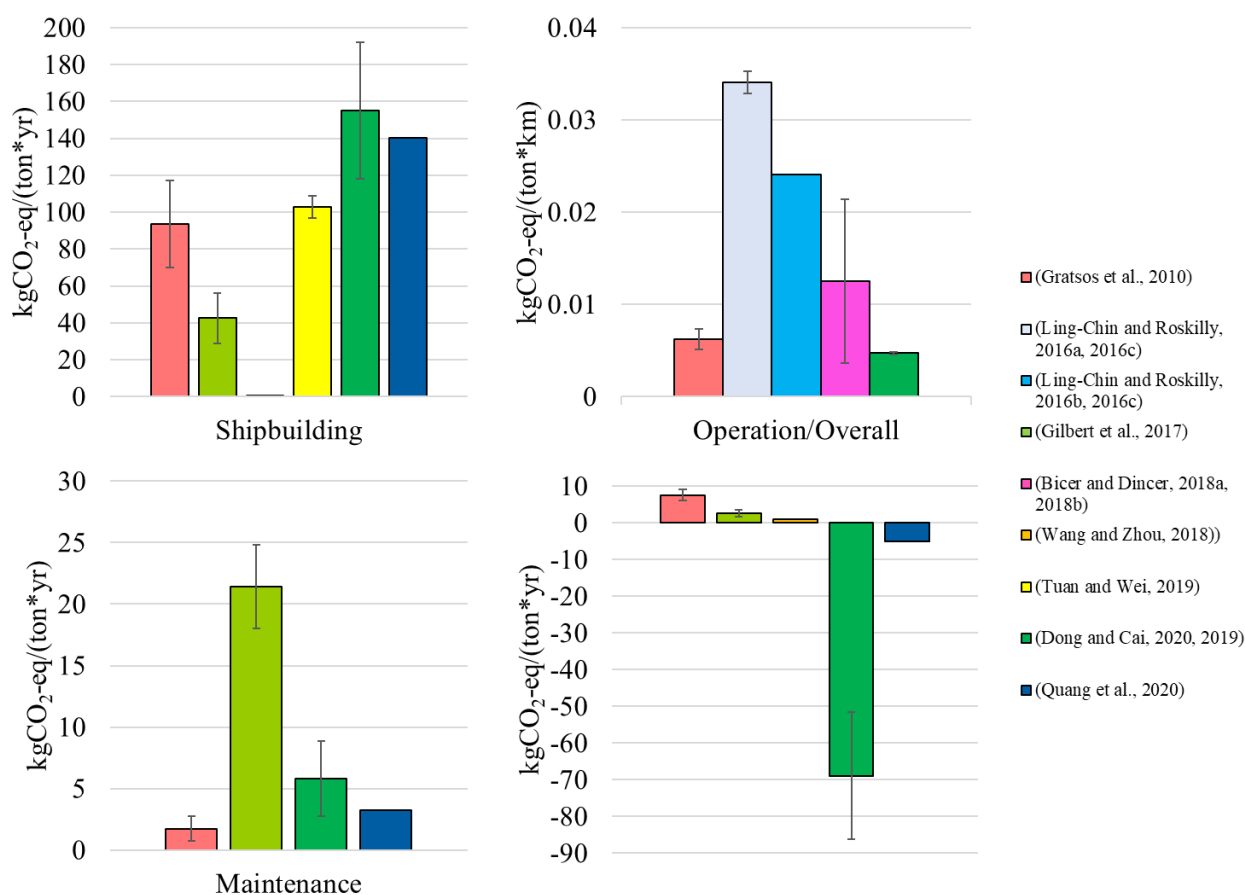


Figure 3: GHG-related normalized scores for Cargo Vessels. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports of life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. Shipbuilding activities that involve the construction of vessel structures produce GHG emissions in the range of 10^1 - 10^2 kgCO₂-eq, based on LWT and lifespan. For each ton of cargo moved for 1 km, operational activities produce 10^{-3} - 10^{-2} kgCO₂-eq, which is aligned withecoinvent documentation. The former is mostly driven by the material (steel) used in freight vessel construction, whereas the latter is primarily influenced by the large amount of transportable cargo and the ships' high utilization.

3.1.4. Fishing vessels

A fishing vessel is a boat or ship employed for catching fish and other seafood generally from wild fisheries for commercial profit. On an estimate, the number of total fishing vessels in the world in the year 2016 was about 4.6 million, mostly operating in Asiatic regions. Fishing boats are grouped under 49315 CPC code and are usually classified using the size of the vessel, expressed in Gross Tonnage (GT) or length. This strictly statistical subdivision is in practical applications often replaced by a simplified form in which "large", "medium sized" and "small" vessels are distinguished. This above subdivision corresponds approximately to the area of operation of the vessel: large fishing vessels operate principally in open seas, medium sized vessels in the Exclusive Economic Zone (EEZ) marine areas and small decked vessels are predominantly used in coastal and sheltered marine and brackish waters. Another categorization is based on the type of fishing activity and processing carried out by the vessel, including trawlers (the ones that pull trawler nets against

the ocean water) and non-trawling vessels (the ones that still use a net but the net is fixed and the fish swim to the net and get themselves caught).

In order to obtain a standard reference unit to normalize the environmental impacts of the operational phase for fishing vessels, three parameters are recommended for this purpose: the quantity of landing [ton], the covered distance expressed in kilometres [km] and the number of trips (unitless [#]) performed in the analysed timespan, as shown in Eq.(6) of Table 1. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary Materials.

Despite the large variety of sizes and types, the available literature refers to LCA studies of fishery activities in different geographical areas (*i.e.*, Mediterranean Sea, Baltic and North Sea). Among the five published documents related to fishing vessels, three of them take into account trawlers, while only two refers to a coastal purse-seining fleet. **In contrast to what was examined for other vessel types, the majority of LCA studies dealing with fishing operations do not consider a single vessel (*i.e.*, a specific case study), but rather a fleet of vessels.** Unlike other vessel categories, the majority of LCA studies dealing with fishing operations do not focus on a single vessel (*i.e.*, a specific case study), but rather a fleet of vessels. (Abdou et al., 2020, 2018; González-García et al., 2015; Ramos et al., 2011). This outcome reflects the fact that fishing vessels used in a geographical area are about the same size and use approximately the same level of technology. Thus, it is interesting to investigate the forecasting of more efficient solutions to allow a correct management and strategic planning of fishing activities.

All the papers adopted approximately the same functional unit, *i.e.*, “1 ton of landed round fish/landed seafood in one year of operation” (Abdou et al., 2020, 2018; González-García et al., 2015; Ramos et al., 2011; Ziegler et al., 2018). The operational phase is the most burdensome activity for this type of vessel due to the fuel combustion which is necessary to reach the fishing site, perform the fishing activities and then process the collected fishes, *i.e.*, making ice to preserve the catches. Most of these works dealt with the prospect of processing fishes at on-shore facilities, so reducing fuel consumption and utilizing more sustainable energy from the power grid. This sort of information may be used by producers to optimize production, and it can also be utilized by enterprises further downstream in the value chain to adapt their sourcing strategy. Increased knowledge of this variability might be utilized to enhance the fisheries management system by, for example, creating the most resource-efficient geographical and temporal limits for fisheries and the allocation of fishing rights. A common aspect among the analysed publications is related to the first step of the LCA methodology (goal and scope definition), *i.e.*, a cut-off mass allocation method with a cradle-to-gate perspective including shipbuilding activity, ship operations, and maintenance. End-of-life was neglected in all research works due to uncertainty and lack of available data. Shipbuilding activity included materials used for hull, fishing gear, engines, as well as paint and anti-fouling production which are also required during maintenance operations. Ship operations included diesel consumption, marine lubricant oil, net replacement, and ice consumption. Emissions to water, air and soil were also included within the system boundaries. Primary **life cycle inventory (LCI)** data from different sources were integrated with background data (*e.g.*, ecoinvent database) and LCIA results were reported mainly following CML-IA baseline and ReCiPe midpoints indicators. Concerning primary data, specific maritime registers/organizations were contacted as well as surveys were performed involving skippers and fishermen. Landings, vessel characteristics (beam, GT, etc.), fishing operations, and fishing areas were the most relevant data obtained from the register. Gathered data included vessels’ operational details (*e.g.*, fuel consumption, number of fishing trips, and number of days at sea) and information about vessel construction (*e.g.*, the material used for construction, paint and antifouling paint quantities, dimensions of vessels, life span). Fishing vessels’ features are provided in Table 5.

The results of LCA studies exhibit how the fishing vessel use phase is responsible of the highest impact along the overall life cycle. The two works of Abdou et al., (2020, 2018) show that more than 96% of the overall impacts for the majority of the environmental categories **impacts** (CML-ADE, CML-ODP, CML-GWP, CML-EP,

and Cumulative Energy Demand-CED) are mainly caused by (i) fuel and lubricating oil production, and (ii) seafood production. On the other hand, the trawler and trawling net manufacturing contributed most to terrestrial and human toxicity (84% and 57%, respectively), and also contributed to marine toxicity (31%). Paint and antifouling production generated lower impacts on marine and human toxicity and land occupation (14%, 13% and 13%, respectively), toxicity-related impact categories. The same trend is shown by Ziegler et al (2018), who found that fuel production and combustion dominated all conventional LCA impact categories, such as ILCD-CC, ILCD-AP, ILCD-Marine Eutrophication (MEU), ILCD-PM, ILCD-POCP, and ILCD-Terrestrial Eutrophication (TEU), with the exception of toxicity-related impacts dominated by the manufacture of materials for fishing vessels and gear. Again, in the work of Ramos et al (2011), vessel operations were the major sources of environmental impacts linked related to fishery, considering all the conventional impact categories assessed, except for ODP and ADE. Except for METP, where the greatest burden was due to antifouling emissions to the ocean, diesel consumption was found as the main contributor to environmental impact within vessel operations for all impact categories. Diesel consumption was discovered to be the primary contributor to environmental effect within vessel operations for all impact categories, with the exception of METP, where the greatest burden was brought on by antifouling emissions to the ocean. The net production and transportation subsystem also appeared as an important contributor in the abiotic depletion ADE and global warming potential GWP categories. Other relevant activities generating environmental impacts were the ice production system and, to a lesser extent, operations related to the construction and maintenance of the vessels (antifouling and steel production). Concerning the work of González-García et al (2015), results are reported in terms of [kgCO₂-eq/ton of landing] by using the ReCiPe midpoint LCIA method. Only a general overview of the LCA impact is reported, neglecting the splitting into shipbuilding, operations and end-of-life, even though the results are consistent with the findings of previous studies. on the same fish type in different scenarios. The final goal claimed by this work is to estimate the environmental burdens linked related to operational inefficiencies, as well as to define target performance values threshold for the optimization of optimizing vessel activities operations. Even if the sources of inefficiency are difficult to identify due to the unpredictable nature of the fishing activity, the main uncertainty seems related to behavioural and operational differences between skippers, while other important parameters, such as the characteristics of the vessels, did not show any correlation to the inefficiency values. Even though it can be challenging to pinpoint the causes of inefficiency because fishing activity is so unpredictable, the main source of uncertainty appears to be related to operational and behavioral variations among skippers, while other crucial factors like the characteristics of the vessels did not correlate with the inefficiency values.

A summary of features of the analysed vessels are reported in Table 5. It is worth noticing that, due to lack of information (e.g., average fishing trip distance), it is not possible to perform the normalization procedure, neither report GHG-related results specific for each life cycle phase. The employment of different materials in shipbuilding and the geographical areas where fishing activities are carried out require a normalizing process to compare different fleets, which would be beneficial in comparing single fishing vessels. Nonetheless, the original scores are reported in Table S.3 of Supplementary Material.

Table 5: Fishing vessels' features of the available LCA studies

Type	Basque coastal purse-seining fleet	Norwegian demersal trawler	Wooden trawlers	Portuguese purse-seining fleet
Source	(Ramos et al., 2011)	(Ziegler et al., 2018)	(Abdou et al., 2020, 2018)	(González-García et al., 2015)
Production site	N.A.	N.A.	N.A.	N.A.
Production year	N.A.	N.A.	N.A.	N.A.

Operation location	Gulf of Biscay (Atlantic Sea)	Norwegian and Barents Sea	Gulf of Gabes (Mediterranean Sea)	Spanish and Portuguese coast (Atlantic Ocean)
Estimated lifetime [year]	N.A.	30	40	40
Number of vessels (fleet)	226	Single vessel	184	20
Length [m]	N.A.	N.A.	22-25	20
Mass Displacement [ton]	N.A.	N.A.	N.A.	N.A.
Deadweight (DWT) [ton]	N.A.	N.A.	N.A.	N.A.
Lightship weight (LWT)[ton]	N.A.	N.A.	105-115	N.A.
Main engine power [kW]	N.A.	N.A.	N.A.	N.A.
Auxiliary engine power [kW]	N.A.	N.A.	N.A.	N.A.
Single trips	N.A.	20/year	13-25/year	N.A.
Fuel type	N.A.	N.A.	N.A.	N.A.
Average fishing trip distance [km]	N.A.	N.A.	N.A.	N.A.
Landing per year [ton/yr]	5000	6200	6300	1000

3.1.5. Pleasure and sporting boats

Pleasure and sporting boats (also known as recreational crafts) are **divided sorted** into numerous main categories and subcategories, depending on their intended use and their size. They are all identified under CPC code 494, which comprehends sailboats, inflatable boats, motor crafts under 6 m, motor yachts under 24 m and motor superyachts over 24 m. Their purpose is generally a recreational use for sport or pleasure, including vessel categories such as (i) paddlesports boats (canoes, kayaks, rowing shells) for sports and recreational activities; (ii) dinghies (usually under 16 ft, 5 m) used for transfers from larger boats, powered by sail, small engines, or muscle power; (iii) runabouts (15-25 ft, 5-8 m) powerboats with either outboard, sterndrive, or inboard engines commonly used for pleasure activities like fishing, racing, boating or as a transfer service from larger vessels; (iv) daysailers sailboats (14-25 ft, 4-8 m) sometimes equipped with sleeping accommodation and a small auxiliary engine; (v) cruisers (25-65 ft, 8-20 m), *i.e.*, powerboats with cabins for accommodation; (vi) cruising and racing sailboats (25-65 ft, 8-20 m) which are sailboats with auxiliary engines and suitable for longer journeys.

With the aim of providing a benchmark to future investigations in this vessel category, the usage of a normalization basis that requires the inclusion of two parameters is recommended: the number of passengers transported ([# unitless]) and the average time [hr] spent on the boat offshore, as shown in Eq.(8) of Table 1. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary Materials.

The rather small dimensions of these vessels allow various production materials using several manufacturing processes. Thus, most of the available literature deals with comparative LCA studies among suitable hull materials or hull manufacturing processes. Among the six published documents, three distinct papers focused on the hull production and disposal (Burman et al., 2014; Cucinotta et al., 2017; Önal and Neşer, 2018), while the other three from the same working group encompassed the entire vessel into the system boundaries (Favi et al., 2018b, 2018a, 2017).

The available studies on this vessel category focus specifically on examining several materials and techniques for hull production. The available research on this vessel category focuses mainly on studying various materials and hull fabrication procedures. The first investigation was published by Burman and colleagues (2014), who compared various materials for the hull production of a patrol craft, excluding from the system boundaries ~~all the elements that were shared among boat alternatives~~ the shared elements among boat alternatives. Although the vessel under examination is not a pleasure boat, its structural characteristics,

lifetime, and yearly fuel use are all typical of a motor yacht. The authors chose “one high-speed patrol craft (TTRB-2000) hull during 25 years of service” as a functional unit and employed CML-IA method for the life cycle impact assessment phase. As a shared outcome with other studies, the use-phase unveiled as the greatest source of environmental impact burden for the majority of impact categories. The features of the patrol craft are shown in Table 6. Normalization step has been performed on the mass of the hulls, i.e., between 4.4 and 8.7 ton, as reported in Table S.5 of Supplementary Material for GHG-related impacts and graphically in Figure , while the lack of information regarding the passenger capacity prevents the normalization of the use phase. While the lack of information regarding the passenger capacity hinders the normalization of the usage phase, the mass of the hulls, i.e., between 4.4 and 8.7 tons, has been normalized as reported in Table S.5 of the Supplementary Material for GHG-related impacts and graphically in Figure 4.

The study of Cucinotta et al. (2017) dealt with the comparison among different manufacturing processes for the production of the hull of a pleasure yacht, which is commonly made of a composite sandwich of glass fibre and polyester or epoxy resins. Two manufacturing processes were considered, i.e., hand lay-up and vacuum infusion, characterized by different amounts of wastes and different weight of the final structure. In fact, vacuum infusion allows a higher glass fibre content, meaning that a lighter infused sandwich provides the same mechanical properties as a heavier one produced by hand lay-up technique. The system boundary comprehended the hull production from cradle-to-grave, with different use-phase and disposal scenarios. The functional unit, despite not clearly stated by the authors, appeared to be “the hull manufacturing and usage for 25 years of service”. Raw materials, production processes and end-of-life activities were related to the hull only, while the operational phase and fuel consumption were calculated on the mass displacement of the boats. Being a comparative life cycle assessment between manufacturing processes for the hull, this study neglected common materials and structures of the two vessels, as their impacts on the final results were equivalent. This study, which was a comparative life cycle assessment of hull manufacturing methods, ignored common materials and structures of the two vessels, as their impacts on the final results were equal. The outcomes of the study demonstrated an overall improvement of environmental performances for vacuum infusion, particularly for low usage scenario. The vessel details are shown in Table 6, while the original and normalized results for GHG-related impacts (based on the LWT of the vessel, to allow comparability with other works in this vessels category) are reported in Table S.5 of Supplementary Material and graphically in Figure 4.

In the first paper of the group (Favi et al., 2017), Favi et al. (2017) employed CAD tool and shipyard information retrieved within lightship weight document, and CAD tool was used to obtain a detailed LCI for a pleasure yacht construction. In order to ease data acquisition by manufacturers, vessel materials were separated sorted by considering functional groups, providing a benchmark for future application. Both LCA and LCC were evaluated, focusing mostly on shipbuilding activities which have been detailed using primary data. System boundary endorsed a cradle-to-gate perspective with various use phase scenarios, exhibiting greater impacts from fuel (MDO) combustion during the operating phase, regardless of the scenarios. The authors adopted “the maritime operational activities and the transportation of persons and goods by sea for a period of 20 years” as a functional unit, claiming that could be elected as a benchmark for different types of vessel categories. Although a unique functional unit for the maritime sector would be practical, it would allow unfair comparison between vessels with different purposes, e.g., a comparison between a cargo vessel and a kayak for transportation. In fact, the horizontal normalization defined in section 3.2 only provides an overview of the design efficiency of the vessel compared to the actual one, failing to account for the unique function offered by each vessel category. Several operating phase scenarios have been studied, considering different annual usage of the superyacht (from 500 to 1,500 hr/year), which have been compared using ReCiPe midpoint indicators. The outcomes shed light on the great influence of the operating phase, as different operating scenarios strongly affect the final results, i.e., for the longest usage the GHG emissions almost doubles. In another paper dealing with the same vessel (Favi et al., 2018b), the authors investigated different shipbuilding techniques (laser cutting, Shielded Metal Arc Welding - SMAW, Gas Tungsten Arc

Welding - GTAW and infusion) and materials for hull and hatches, including carbon steel, aluminium and carbon fibre composite. The LCIA results showed that aluminium hulls had better environmental performance (particularly in terms of ecotoxicity and metal depletion), with marginal gains when carbon fiber composite hatches were used. The vessel details are reported in Table 6, while the normalized results are shown in Figure 4. The authors further extended their previous works through a collaboration with several Italian shipyards in order to provide an LCA/LCC tool for calculation of pleasure yachts' environmental footprint (Favi et al., 2018a). The proposed methodology recommended the utilization of a singular functional unit, similar to the previous one, which could be adapted to every vessel category: *"the construction and the disposal of a vessel for the transportation of persons and goods and/or operational activities by sea for a period of T years"*, where T represents the lifespan of the vessel (commonly 20-25 years). This definition broadens the system boundaries endorsing a cradle-to-grave perspective, where operational and end-of-life scenarios are employed to model the impact of the ship after the production phase. Although this functional unit looks practical and easy to implement, the development of a specific functional unit for each peculiar vessel type may prevent an unfair comparison between vessels belonging to different categories, as previously stressed. Nevertheless, the authors presented a detailed and valuable guideline for LCA practitioners in the maritime sector, splitting the vessel into its constitutive functional systems and specifying the data source for compiling a reliable life cycle inventory. This guideline is then validated through a comparative cradle-to-grave LCA study on three pleasure yachts (see Table 6), whose outcomes are consistent with the general trend of locating the major impacts during the operational phase. A comparative cradle-to-grave LCA on three pleasure boats is used to support this guideline, and the results are shown in Table 6. These results are consistent with the general pattern of locating the greatest impacts during the operational phase. The impact assessment has been performed using midpoint ReCiPe method in combination with Cumulative Energy Demand (CED), even though the authors report the results for Climate Change (tCO₂-eq) only. The results gained by Favi and colleagues (2018a) are reported in Table S.5 of Supplementary Material, along with the normalized scores obtained through the normalization procedure. The most burdensome operational phase is exhibited by the aluminium yacht (P140), followed by the steel/aluminium vessel (C136) and the glass-fibre one (CNR43). Apart from the operating phase, the shipbuilding operations achieve comparable produce equivalent outcomes. Considering the end-of-life of the vessels, CNR43 gets the lowest end-of-life benefit, being polymer-based materials mostly landfilled, while metal-based yachts improve their overall performances thanks to their high recycling rate. The normalized scores are shown in Figure 4. When comparing the end-of-life benefits of the different vessels, CNR43 has the lowest benefit since polymer-based materials are primarily landfilled, whereas metal-based yachts have higher benefits because of their high recycling rates (Figure 4).

Focusing on different shipbuilding techniques and various recycling practices, Önal and Neşer (2018) analysed the manufacturing and EoL phases of a glass-reinforced polyester vessel hull of a recreational boat. The functional unit was defined as *"the complete life cycle of 11 m long GRP boat hull; produced in Izmir (Turkey), excluding operation stage of the boat and recycled in a Turkish state-of-the-art recycling system"*. Primary data was collected from interviews and site visits at the shipyard, while secondary data was retrieved within ecoinvent database. The LCIA calculations have been performed on SimaPro using CML-IA baseline impact categories. The results for composite hulls show that vacuum infusion has a slightly larger environmental impact (approx. 2.5%) than hand lay-up due to its higher energy consumption, but it also has a reduced risk of occupational health since it uses less raw material in a closed mould. but there is also a lower chance of occupational health problems, thanks to the usage of a lower amount raw materials in a closed mould. This conclusion contradicts Cucinotta's findings (Cucinotta et al., 2017), which found that vacuum infusion performed better in every impact category. The findings of Cucinotta et al. (2017), which revealed that vacuum infusion performed better in every impact category, are in conflict with Onal's findings. Even though Cucinotta's study appears to be more accurate, thanks to a deeper analysis of the manufacturing practice, additional research is needed to fully understand this issue. Even though Cucinotta's study appears to be

more accurate as a result of a deeper analysis of the manufacturing processes, more investigation is still required to fully comprehend this topic. The comparison between the disposal alternatives reveals that mechanical recycling, followed by granule extruding process, shows better environmental impacts except TETP, POFP and AP. With the exception of TETP, Photochemical Oxidant Formation Potential (POFP), and AP, the comparison of the disposal scenarios suggests that mechanical recycling, followed by the granule extrusion method, has lower environmental burdens. Among the end-of-life alternatives, landfill has shows the highest environmental impacts, while composite recycling showed the best performance. However, even if the process of recycling for composites hull seems beneficial in terms of environmental impacts, its technological feasibility is still an unresolved issue.

Table 6: Pleasure vessels' features of the available LCA studies

Type	TTRB-2000 Patrol Craft	Motor Yacht	"Supercoronero" Yacht	Superyachts	Weekender Boat
Source	(Burman et al., 2014)	(Cucinotta et al., 2017)	(Favi et al., 2018b, 2017)	(Favi et al., 2018a)	(Önal and Neşer, 2018)
Production site	Sweden	Italy	Italy	Italy	Turkey
Production year	N.A.	2006	2016	N.A.	N.A.
Operation location	Sweden	Mediterranean Area	World	Mediterranean Area	Mediterranean Area
Estimated lifetime [year]	25	25	20	20	10
Maximum speed [knots]	33	33	15	15-38	N.A.
Mass Displacement [ton]	27.4-33.6	34.284	432	N.A.	N.A.
Deadweight (DWT) [ton]	N.A.	3	42	N.A.	N.A.
Lightship weight (LWT)[ton]	4.4-8.7 (Hull)	28.150-31.284	390	230-390	4
Main engine power [kW]*	N.A.	2x820	2x1,081	2x1,081 2x1,045 4x1,939	N.A.
Auxiliary engine power [kW]*	N.A.	16	2x125	2x125, 1x55 2x100 2x80	N.A.
Fuel type	MDO	MDO	MDO	MDO	N.A.
Passenger capacity	N.A.	6	10	10	N.A.
Average offshore period [hr/yr]	1,000	200-500	500-1,500	500	N.A.

*If more than one engine was present, the number of engines was specified, along with the specific engines power

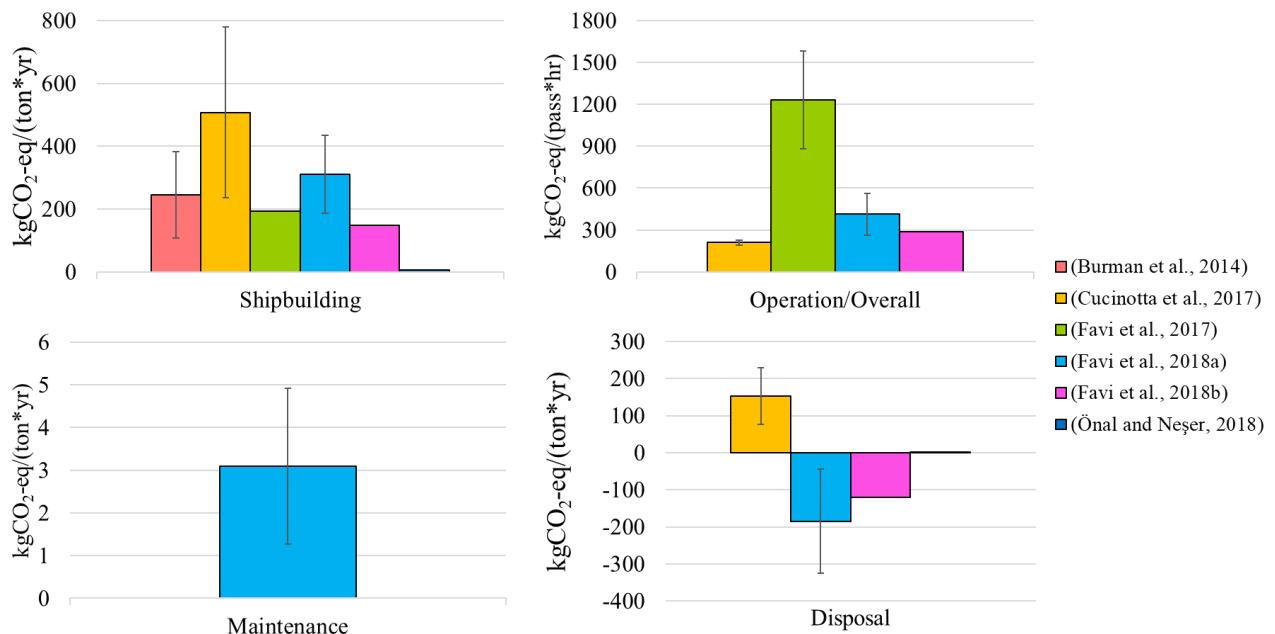


Figure 4: GHG-related normalized scores for Pleasure and Sporting Boats. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports of life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. Shipbuilding activities involving the construction of vessels' structures produce GHG emissions in the range of 10^2 kgCO₂-eq normalized on LWT and lifespan, which are coherent with the emissions related to the shipbuilding of other vessel types using the same construction material. For each passenger carried for one hour, 10^2 - 10^3 kgCO₂-eq are emitted by operating activities. These outcomes, averaged among various works and strongly dependent on estimated operational profiles, exhibit the impact of leisure activities of motor yachts, which usually have low passenger capacity and high fuel consumption.

3.1.6. Other vessels categories and naval systems

Other vessel categories, different from the ones reported in the previous sections were investigated following the LCA principles. However, these analyses are limited and isolated. Following the LCA principles, research was done on additional vessel classifications that weren't included in the earlier parts. These analyses, though, are constrained and isolated. For example, only two publications from the same research group dealt with tugboats' characteristics (Jeong et al., 2018; Wang et al., 2020), both focusing on optimising the power system and its application offshore. A tugboat, often known as a tug, is a nautical vehicle that pushes or pulls other vessels using direct contact or a tow line. Tugs usually tow ships that can't move on their own, including barges, damaged ships, log rafts, or oil platforms. Tugs are powerful and durable for their size, and they are designed based on the environment they operate in, such as ocean-going tugs, icebreakers or salvage tugs.

As previously reported, Jeong et al. (2018) developed a comprehensive tool for determining the optimum ship design among numerous options in terms of long-term cost and environmental implications. The characteristics of the tugboat under investigation are reported in Table 7. Two power system configurations as well as flexible engine operating scenarios were investigated, with one configuration resulting in less engine running hours, due to a more distributed workload among the engines. Two different power system designs and flexible engine operating scenarios were examined, with one of the setups resulting in less engine running hours since the burden was spread more evenly across the engines. Various speeds have been presumed, yielding useful findings for various operating practices and underlining that running at a slower

pace would be preferable in terms of cost-benefit and environmental consequences. A slower pace would be desirable in terms of cost-benefit analysis and environmental effects, according to various speeds that have been assumed. These conclusions are helpful for different operating procedures. The weights of the engines under examination, 102 and 36 ton for the base case and alternative option, respectively, were used to normalize the data using Eq.(7) of Table 1, as reported in Table e-7. Using Eq.(7) of Table 1, the data were normalized using the weights of the engines under investigation, 102 and 36 ton for the basic case and alternate option, respectively. The results are shown in Table 7.

Wang et al. (2020) investigated a tugboat's life cycle performance, specifically comparing different configurations of the propulsion system and selecting an optimal system with the lowest emissions release, costs and hazard impacts. The life cycle performance of a tugboat (Table 7) was evaluated by Wang et al. (2020), who carefully compared various propulsion system configurations and chose the best system with the lowest emissions release, costs, and hazard implications. The authors employed a self-developed software (ShipLCA) as a decision-making tool to help identifying the optimal setup while in terms of selecting engines, configuring systems or applying using different electricity sources. Results are expressed in terms of GWP and AP by adopting CML-IA as LCIA method, while Tugboat's features are provided in Table 7. In this case the functional unit was defined, as "the quantified ship performance during its service". This choice was done by the authors to allow the end-users to set up an assessment based on a different objective. Primary data related to engine consumption during operational activities and fuel supply chain scenarios were coupled with background data retrieved from the Gabi database. The findings are consistent with LCA studies conducted on other vessel categories, as types; indeed, the ship operation exhibits the highest share of environmental impacts, both in terms of GWP and AP. The use phase accounts for approximately 90% for the GWP and about 98% for the AP in relation to the total impact, regardless of the type of engine technology. It is worth highlighting that the shipbuilding and end-of-life phases were considered only for the engine module, and not for the entire ship. Although the operating phase emissions are well described by the developed tool, the results reported within the paper for the shipbuilding and decommissioning phases are not consistent between the two calculation methods. (GaBi tool and ShipLCA). In fact, the GWP score obtained by using GaBi tool is approx. $1.24E+04$ kgCO₂-eq for both construction and scrapping activities combined (other activities), while the GWP results obtained using ShipLCA are $3.32E+06$ and $2.82E+03$ kgCO₂-eq for the construction and scrapping phases, respectively. Since no further information was given to address this gap and no data was reported about shipbuilding and decommissioning, it is not possible to identify the reason behind this inconsistency. Because no additional information was provided to fill this gap, and no data about shipbuilding or decommissioning was provided, it is difficult to determine the cause of this mismatch.

Park et al. (2020) evaluated the environmental benefits of the LNG partial re-liquefaction system applied to LNG carriers by comparing five different combination/configuration of LNG re-liquefaction systems. An LNG carrier is a tank ship designed for transporting liquefied natural gas (LNG) and it can be seen as a special type of tanker, it might be thought of as a peculiar kind of tanker. Since the gas is transported in liquid phase, pressures much greater than atmospheric one and/or very low temperatures are required. Therefore, LNG carriers can be classified as (i) fully pressurized, (ii) semi-pressurized and refrigerated, and (iii) fully refrigerated. Looking at the work of Park et al. (2020), the authors performed LCA analysis to evaluate the environmental benefits of a LNG partial re-liquefaction system applied to LNG carriers by comparing five different combination/configuration of LNG re-liquefaction systems (Table 7). Since the analysis is focused at the operations on-board of the vessel, materials and manufacturing of the vessel itself were neglected, as well as the vessel decommissioning. Results are expressed in terms of GWP, AP, POCP and PM2.5 by adopting CML-IA as LCIA method. In this case the functional unit was set as "a system capable of re-liquefying 4000 kg of the BOG (Boil Off Gas) in an hour for 25 years" for a comparison purpose. Primary data related to re-liquefying systems were estimated on the basis of data from manufacturers and coupled with background data retrieved from the Gabi database. Results highlighted that the most burdensome phase is the use phase, accounting approximately. The results revealed that the use phase is the most burdensome, accounting for

around 98% for the GWP indicator (88% refers to the re-liquefaction process while 11% to the fuel production). It is worth to highlight that the manufacturing and scrapping phases are related exclusively to the re-liquefying system, neglecting the other components of the ship. It is worth noting that the manufacturing and scrapping phases are solely concerned with the re-liquefying system, ignoring the ship's other components. A gap among the five analysed system is noticed, again reflecting the differences in fuel consumption for the operational phase. There is a disparity between the five systems studied, which reflects variances in fuel use during the operational phase. The outcomes of the LCA study (only GWP) are reported in Table S.6 of Supplementary Material.

Table 7: Other vessels' features of the available LCA studies

Type	Tugboat	"Salvation 21" Tugboat	Re-liquefaction systems applied to LNG carrier
Source	(Jeong et al., 2018)	(Wang et al., 2020)	(Park et al., 2020)
Production site	N.A.	N.A.	China
Production year	N.A.	N.A.	N.A.
Operation location	South Korea	South Korea	USA and South Korea
Estimated lifetime [year]	30	30	25
Service speed [knots]	N.A.	N.A.	N.A.
Mass Displacement [ton]	2270	N.A.	N.A.
Deadweight (DWT) [ton]	N.A.	156	115,541
Lightship weight (LWT) [ton]	N.A.	N.A.	N.A.
Main engine power [kW]*	2x4,500 4x2,200	2x1,518 3x1,062 2x1,062 4x761 3x761	2x18,200
Auxiliary engine power [kW]	N.A.	N.A.	N.A.
Fuel type	MDO	HFO	HFO
Single Trips	N.A.	N.A.	155/lifetime
Average distance travelled by cargo [km]	N.A.	N.A.	27,000 (estimated)

*If more than one engine was present, the number of engines was specified, along with the specific engines power

Two works (Andersson and Winnes, 2011; Jang et al., 2020) focused on the operational profile of maritime vessels using an exhaust gas cleaning system (commonly called scrubber system) installed on-board of the vessel to remove SOx and particulate matter (PM) emitted by conventional engines. The two papers examined the trade-off between the benefits received from the deployment of a scrubber system throughout the course of a ship's entire life cycle and the drawbacks produced by its fabrication and installation. Several scrubber systems were assessed (i.e., open loop vs. closed loop) to prevent heavy fuel oil (HFO) emissions by using a LCA analysis. In the work of Andersson and Winnes (2011), the LCA performances of the installation and usage of different various scrubber systems on-board of a RoPax vessel (called Stena Britannica) was assessed. On the other hand, the research of Jang et al. (2020) dealt with scrubber systems employed by generic Ro-Ro vessels, providing a decision-making tool for the design of a scrubber system in the early phase of design (considering vessel size, engine power and service lifetime). On the other hand, the research of Jang et al. (2020) focused on scrubber systems used by generic Ro-Ro vessels and offered a decision-making tool for the design of a scrubber system in the early stages of design (considering vessel size, engine power and service lifetime). The results of these works are expressed using the most common LCIA indicators (i.e., GWP, EP, AP and HTP) following the CML-IA method. Despite the analysis was performed on the same system the results are significantly different: in the work of Andersson and Winnes (2011), an open loop scrubber system is preferred since less materials and components are required compared to a closed loop scrubber system. This result is in contrast with the outcome of Jang et al. (2020) study, where closed-loop scrubbers

show better performance than open-loop scrubbers in terms of GWP and AP, whereas the opposite trend is found for EP. However, two parameters result dominant on the holistic environmental impacts of SOx scrubber systems: the power and the year (age) of operation. As a common outcome, even if scrubber systems contributed to the AP reduction, they were shown to exacerbate other environmental impacts such as GWP and EP.

As a conclusion, for other types of vessels which have a peculiar operational profile and purpose, the focus of the LCA analysis was not the entire vessel, but rather the equipment and the emissions related to the activity that is taking place on-board. The LCA is performed considering the whole life cycle of the ship or the naval system under study and the use phase is the most impactful phase among the others (i.e., equipment manufacturing, installation and decommissioning). The usage phase is the most significant among the other phases in the LCA, which is carried out taking into consideration the whole life cycle of the ship or naval system under study (i.e., equipment manufacturing, installation and decommissioning). For these vessel categories, it is hard to find a functional unit to standardize the LCA analysis and thus allow a comparison between different works. Finding a functional unit to standardize the LCA analysis and enable comparisons between various works is challenging for these vessel categories. The entire vessel was rarely considered within the system boundary of the LCA study, with only the system of interest being taken into account, e.g., the re-liquefaction system or the scrubber system.

3.2. Horizontal normalization based on vessel features

The following findings are the result of a normalization of LCA outcomes based on the primary vessel characteristics (i.e., weight and power). The horizontal normalization, carried out independently from the vessel categories, allows for comparison of LCA outcomes, offering an overview of distinct ship category clusters and an associated index for assessing their efficiency. Due to a scarcity of data reported in the referenced papers, only a subset of vessels was examined in this horizontal normalization. Vessels features of the considered works are reported in Table 8 and the horizontal normalization was performed using the Eq.(9) previously defined. The comparison was done taking into account four vessel categories: (i) pleasure and sporting boats, (ii) ferries, (iii) tankers, and (iv) cargo. For other vessel's categories, data for the horizontal normalization were not available.

Table 8: Vessels' features of the available LCA studies for horizontal normalization

Category	Authors	LWT [ton]	Power [kW]	Power/LWT ratio [kW/ton]	GWP shipbuilding [kg CO ₂ -eq]	GWP operation [kg CO ₂ -eq]	LES [% kg CO ₂ -eq]	Efficiency Ratio [%kg CO ₂ -eq/kW/ton]
Pleasure - C136	(Favi et al., 2018a)	390	2,467	6.33	1.76E+06	2.97E+07	5.93E-02	9.37E-03
Pleasure - CNR 43		280	2,290	8.18	1.04E+06	2.65E+07	3.92E-02	4.80E-03
Pleasure - P140		230	7,916	34.42	2.00E+06	5.63E+07	3.55E-02	1.03E-03
Pleasure - Infusion	(Cucinotta et al., 2017)	28	1,640	58.26	1.66E+05	5.72E+06	2.91E-02	4.99E-04
Pleasure - Hand Lay-up		31	1,640	52.42	6.09E+05	1.71E+07	3.56E-02	6.78E-04
Ferry - Reference	(Blanco-Davis et al., 2014)	13,635	48,000	3.52	2.89E+07	1.83E+09	1.58E-02	4.49E-03
Ferry - with coating		13,635	48,000	3.52	2.89E+07	1.69E+09	1.71E-02	4.86E-03
Tanker 1	(Chatzinikolaou et al., 2015)	13,925	14,520	1.04	2.29E+07	1.07E+09	2.14E-02	2.05E-02
Tanker 2	(Quang et al., 2021)	13,925	14,520	1.04	3.62E+07	1.77E+09	2.05E-02	1.96E-02
Cargo 1	(Dong et al., 2019)	11,400	8,830	0.77	4.37E+07	6.08E+08	7.19E-02	9.28E-02
Cargo 2		12,200	8,830	0.72	4.39E+07	9.33E+08	4.70E-02	6.49E-02
Cargo 3		11,400	8,830	0.77	4.37E+07	5.77E+08	7.58E-02	9.79E-02
Cargo 4		12,200	8,830	0.72	4.39E+07	8.85E+08	4.96E-02	6.85E-02

Cargo 5	(Quang et al., 2020)	11,400	8,830	0.77	4.79E+07	9.60E+08	4.99E-02	6.44E-02
---------	----------------------	--------	-------	------	----------	----------	----------	----------

In the case of pleasure and sporting boats, the paper published by Favi et al. (2018a) assessed three motor yacht, whose Power/LWT ratio ranges from 6.33 to and 34.42 kW/ton, while Cucinotta et al. (2017), employed two different manufacturing processes for the construction of the same hull, leading to different lightship weights (28-31 ton). Considering that the yacht's installed engines were of equal power, the Power/LWT ratios are 58.26 kW/ton for the yacht manufactured with infusion process, and 52.42 kW/ton for the yacht manufactured with hand lay-up process. The research published by Blanco-Davis et al. (2014) deals with two ferry configurations: (i) one that serves as a benchmark, and (ii) one that has a fouling release coating applied, with an identical Power/LWT ratio of 3.52 kW/ton. In the case of tankers, Chatzinikolaou et al. (2015) and Quang et al. (2021) took into account the same vessel with a power/weight ratio of 1.04 kW/ton. Due to the fact that the same type of vessel was analysed with small differences in terms of GWP, the horizontal normalization shows very similar results. Two publications fell into the cargo vessel category. The work of Dong et al. (2019) takes into account four configurations of two vessels with identical engine power, one of which was also considered in the work of Quang et al. (2020). In the case of cargo vessels, the power/weight ratio is ranging from 0.72 and 0.77 kW/ton.

An overview of the results obtained for the horizontal normalization is presented in Figure 5. The size of the bubbles represents the vessel design efficiency (power/weight ratio) and it is calculated as the ratio between the main engine power [kW] over the lightship weight [ton]. The larger the bubble, the higher the ratio, indicating that the engines are oversized to increase navigation speed. In Figure 5, the Y-axis represents the Lifecycle Emission Share (LES), and the X-axis shows the Efficiency Ratio. The LES is calculated dividing the "Impacts of shipbuilding operations and construction materials" by the "Impacts of operational phase". This index indicates the share of environmental impacts generated during shipbuilding activities in comparison to the navigation/use phase, which is typically the most critical phase in terms of GHG emissions. The meaning of the LES reflects the efficiency of the vessel during the operational phase in terms of emissions, therefore, the increase of the LES is achieved by reducing the emissions during the operational phase, keeping the emissions during the shipbuilding operations constant. The higher LES, the lower the relevance of the operational phase in terms of environmental burden. The Efficiency Ratio, which expresses the normalization of the lifecycle emissions in relation to the vessel features, is derived by dividing the LES by the power/weight ratio. The bigger this index, the most efficient is the vessel (low power/weight ratio and low impacts related to the operational phase) meaning that the engineering design of the vessel was properly done.

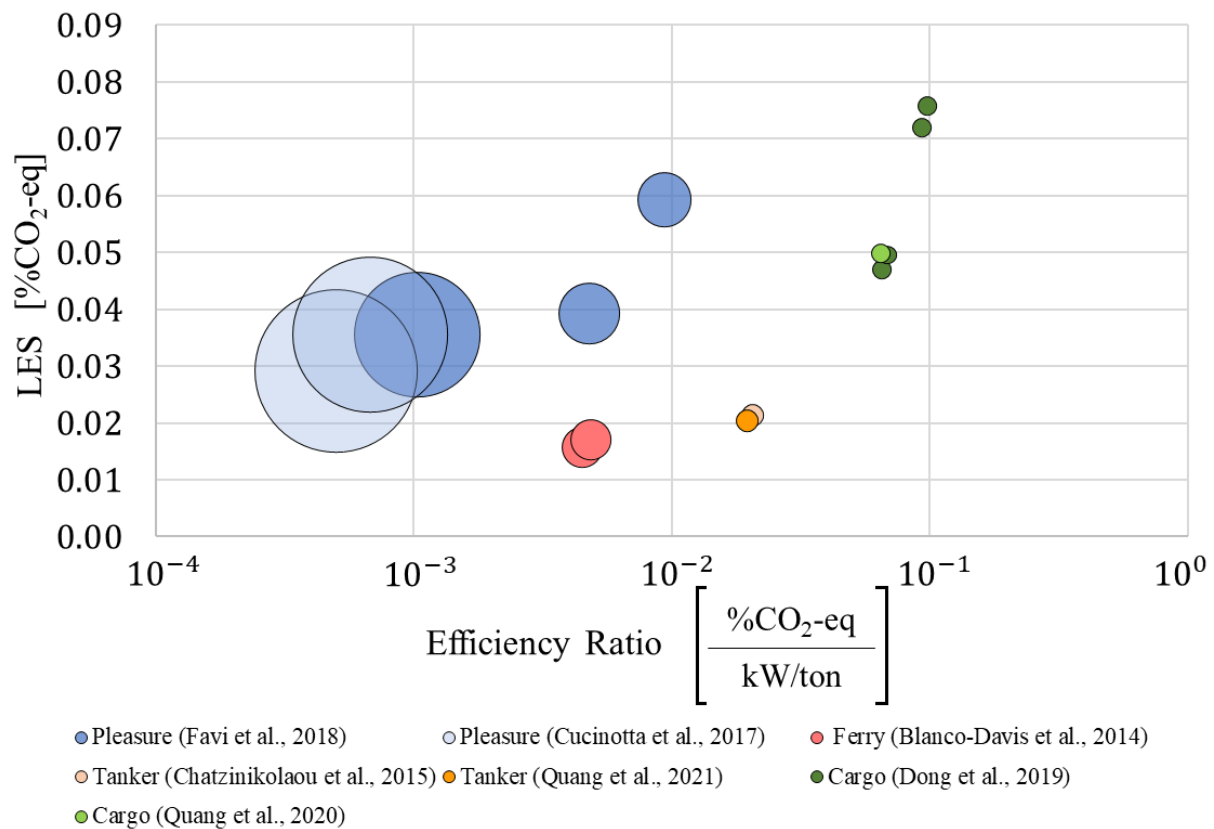


Figure 5: horizontal normalization and comparison among different vessel categories for GHG-related impact categories.

Based on the aforementioned parameters, it is possible to clearly identify four areas of the graph that characterize each analysed vessel category (Figure 5). The pleasure boats are located in the central-left area of the graph. They are characterized by a high power/weight ratio (big size of the bubbles) due to the fact that the engines are usually oversized in relation to the lightship weight. Indeed, the choice of installed power for this type of vessel is not based on the engineering optimization but rather on producing high performance vessels. Although their specific emissions are significant (due to oversized engines), their modest utilization counterbalance their poor environmental performances, narrowing the potential gap between their LES and that of more efficient vessels. For this type of vessel, the Efficiency Ratio ranges from 10^{-4} to 10^{-2} indicating unequivocally that it is the most critical category in terms of environmental impacts. Cargo vessels, on the other hand, are positioned in the upper-right corner of the graph due to their low power/weight ratio (small size of the bubbles), high LES, and high Efficiency Ratio. Commonly, their engines are sized to minimize fuel consumption throughout the operational period (for cost minimization), but the environmental impacts related to the use phase is significantly more relevant than the shipbuilding ones, owing to long navigation periods. Cargo vessels have one of the highest Efficiency Ratios among all vessel categories, with a magnitude of 10^{-1} ranking them among the most efficient in terms of environmental performance. Similar behaviour is noticed for the tankers, with a comparable value of the power/weight ratio (small size of the bubbles) but a lower value of the LES. In this case, they are mostly positioned in the central part of the graph, leading this vessel category close to the cargos for what concern the environmental performance (e.g., the Efficiency Ratio is between 10^{-2} and 10^{-1}). Ferries are characterized by a quite relevant power/weight ratio (the size of the bubbles is between the tankers and the pleasure boats) while the LES is the lowest among the vessel categories. This is likely caused by the use-phase emissions, which are more significant because of the large number of manoeuvring operations at the port and the higher speed required during navigation. Due to these factors, the environmental consequences associated with shipbuilding activities are less significant than those associated with the operation phase, placing this vessel category within the central-bottom portion of

the graph. For this vessel category, the Efficiency Ratio is between 10^{-3} and 10^{-2} , making ferries one of the most impactful categories after pleasure boats.

3.3. Publications on vessel-related activities

Several activities are associated with maritime vessels and they were analysed independently from the vessel categories. Based on the review of the literature, a possible classification of these activities is proposed: (i) shipyard manufacturing and maintenance activity, (ii) port activity, and (iii) ship breaking activity.

Concerning the shipyard manufacturing activity, two works of Favi et al. (2019b, 2019a), described an ISO-compliant procedure to perform an LCA analysis of complex welded structures (*i.e.*, the ship hull) by using engineering design documentation, reducing the uncertainty related to primary data. In both studies, ISO-compliant LCA methodology was adopted. The functional unit was defined as “*the manufacturing, use, and disposal of a welded structure able to guarantee the engineering requirements (according to a specific standard) in terms of strain, stress, and corrosion allowance over the expected lifetime of T-years*”. The functional unit refers to a specific lifetime, and T represents the lifespan of the product specified at the beginning of the project. Primary data was collected from engineering design documentation (*i.e.*, CAD model, welding procedure specifications, etc.), while secondary data was retrieved within ecoinvent database. ReCiPe impact assessment method (both midpoint and endpoint impact categories) was coupled with the CED method for the LCIA. The two works were focused at the data acquisition and management in case of large and complex welded products. The data collecting and management for large and complex welded structures were the two works' main objectives. The first one was mainly focused on the analysis of products/structures manufactured with metal arc welding technology (Favi et al., 2019a), while the second one provided also a tool for the welding technologies comparison (Favi et al., 2019b). The comparison of welding technologies shows how there is not an optimal solution for the development of welded structures, such as ship hulls. Indeed, the GMAW (Gas Metal Arc Welding) process exhibits the least environmental burden for most of the environmental indicators compared with other processes, but it performs quite badly in terms of human toxicity, which is directly connected with fume emissions. The LCA comparison of welding processes allowed the authors to define several design actions aiming at reducing the environmental impacts related to the manufacturing of welded structures, among which a possible measure to control the impact of filler material is the adoption of a different bevel geometry (*i.e.*, narrow bevels) that minimizes the amount of filler material. On the other hand, According to an analysis of the products/structures manufactured with metal arc welding technology, shows how carbon steel seems to be the most suitable metal material for the construction of ship hulls, being LCA results show that aluminium hull is more impactful for most of the environmental indicators compared with the carbon steel hull, except for ODP, Metal Depletion (MD), Ionizing Radiation (IR), and HTP. From the environmental perspective, the authors claimed that the adoption of carbon steel is a preferable solution if the analysis is limited to the shipbuilding activities.

Despite the fact that port operations are an integral part of a vessel's operating activities, they are rarely included within the life cycle of vessels. For this reason, port activities are commonly analysed using a different functional unit, which is not strictly related to the vessel itself. In terms of port activities, the work of Zuin et al. (2009) analysed the ship waste streams in a specific area location (the Port of Koper, Slovenia), attempting to quantify the impacts of cargo vessel-generated waste in order to identify the critical procedures. The functional unit was defined as “*the average annual amount of cargo-generated waste collected and managed in Luka Koper in 2007 (i.e., 2200 tonnes/year of cargo)*”. Both primary data collected directly from the port and secondary data retrieved by the ecoinvent database were used in the analysis. EI99 impact assessment method was used as LCIA method, including both midpoint and endpoint impact categories indicators. Environmental concerns due to ship waste management and disposal (*e.g.*, landfill, incineration, etc.) outside the port area were also evaluated by LCA methodology with the goal of increasing the awareness of decision makers (*i.e.*, port authorities). To increase the awareness of decision-makers, environmental concerns resulting from ship waste management and disposal beyond the port region (*e.g.*,

landfill, incinerator, etc.) were also assessed. The waste streams analysed in this work included mixed solid waste, biodegradable waste (*i.e.*, kitchen waste), wastewater (*i.e.*, oily bilge waters), and other residues. Based on LCA outcomes, sea ports produce large amounts of oily and solid waste, as well as chemical hazardous residues, that require a sustainable disposal practice. The regulatory framework developed in this context sets the minimum requirements for waste disposal in order to achieve a more sustainable management of port waste. To promote a more sustainable management of port waste, the legislative framework created in this context specifies the minimal standards for waste disposal. There is a need to encourage further actions aimed at improving reduction, recycling and reuse of ship-generated waste. Indeed, the assessment results indicate that the production of secondary fuels during the waste treatment phase allows to partially reduce the impacts by limiting the fossil resources depletion, *i.e.*, natural gas and coal, and air emissions (*e.g.*, CO₂). There is a need to stimulate more measures focused at increasing the reduction, recycling, and reuse of ship-generated waste. Indeed, the assessment results showed that producing secondary fuels during the waste treatment phase provides for a partial reduction in impacts by limiting the depletion of fossil resources, such as natural gas and coal, as well as air emissions. The analysis also indicates that 95.3% of all environmental impacts are caused by the final treatment of ship waste, and the landfill disposal of solid ship waste contributes the most to environmental burdens. The analysis also showed that the final treatment of ship garbage, specifically landfill disposal, was responsible for the majority of all environmental problems. Another work related to the port activity was performed by Dvarioniene et al. (2013) with a specific focus at the oil waste management from ship engine bilge entering in the Klaipeda Sea Port, Lithuania. A life cycle assessment was performed to evaluate identify and quantify the environmental impacts caused by the ship-generated waste management, focusing on oily waters. The functional unit was defined as “ship-generated waste, focusing on oily waters, of the port of Klaipeda in 2007 and 2008”. Oil water management for all stages of the life cycle was equalized to CO₂ gas effect expressed as kgCO₂-eq, according to IPCC indicator. The analysis estimated that oil waste constitutes about 74% the majority of the whole collected waste amount. The prospect of using engine bilge water as a source of thermal energy by combustion is a viable method for reducing greenhouse gas emissions connected to engine bilge water. A suitable improvement towards this direction is represented by the usage of the generated thermal energy to cover the engine bilge water treatment process, reducing the carbon footprint by 60%.

Shipbreaking (or dismantling) is a key activity that allows to modernize global shipping by replacing outdated ships and recycling or reusing up to 95 % of their materials. Shipbreaking (or dismantling) is a crucial process that enables the replacement of out-of-date ships and the recycling or reuse of up to 95% of their materials, modernizing global shipping commerce. Ocean-going ships are usually sent for dismantling after serving the global shipping fleet for 20–30 years. Bangladesh is dominating global shipbreaking processing with more than 2,300,000 LWT processed in 2009 (Sujauddin et al., 2015). Several works have been published in relation to the shipbreaking segment, utilizing an LCA approach to address the environmental issues associated with the shipbreaking activities (Choi et al., 2016; Ko and Gantner, 2016; Önal et al., 2020; Rahman et al., 2016). Choi et al. (2016) analysed the ship disposal management options with economic cost-benefit features and life cycle thinking approach, while Rahman et al. (2016) proposed an LCA analysis to compare rebar production in Bangladesh using secondary steel scraps recovered from ship recycling, reaching equivalent conclusions. The two works are aligned and bring equivalent conclusions. Focusing on the work of Choi et al. (2016), current scenarios for end-of-life ship management were addressed both in terms of economic feasibility and environmental impacts. Although recycling is the most frequent technique of end-of-life ship management, other options were studied, including (i) dry-dock ship breaking, (ii) beaching, and (iii) reefing. The functional unit was defined as “the lightship weight (LWT) of the recycled ship” considered for each disposal scenario. Primary data was were collected directly from the ship breaking yards and recycling facilities when available, while secondary data was were retrieved within the ecoinvent database. To assist the economic evaluation from a sustainability standpoint, a cost-benefit analysis was integrated into the life cycle study. Even though ship recycling appears to be the most ecologically beneficial choice according to the

TRACI midpoint impact assessment method, it only delivers a marginal economic gain. Standard ship breaking techniques prevent the release of harmful contaminants into the environment while also reducing the demand for numerous virgin materials. However, when compared to recovered materials from dry-dock ship breaking process, recovered materials from beaching did not show ~~much larger~~ significantly greater environmental impacts. This is primarily due to a lack of data and great uncertainty in estimating the environmental impact of ship recycling using beaching methods. Limited information prevented a numerical study of the reefing alternative, and only a review of the literature was conducted to address the key environmental problems of this process. ~~Focusing at the work of Rahman et al. (2016), the environmental impacts of rebar manufacturing from recovered metal, derived from ship recycled iron scraps, were investigated.~~ The environmental implications of rebar manufacturing from recovered metal, produced from ship recycled iron scraps, were investigated in the work of Rahman et al. (2016). The functional unit was defined as “one ton of rebar produced at a manufacturing facility”. ~~Primary data was collected directly from interviews done with local workers and managers at the ship breaking facilities, while secondary data was retrieved within ecoinvent database.~~ Primary data were gathered through direct interviews with local workers and managers at ship breaking sites, while secondary data were retrieved from the ecoinvent database. IPCC 2013 100a and IMPACT 2002 were employed as LCIA methods to include both midpoints and endpoints perspectives. ~~Even if the recycling of steel from ship waste is still polluting and harmful from a social viewpoint, the environmental advantages (up to one order of magnitude per indicator) are evident when compared to manufacturing methods using raw materials, according to the LCA results.~~ According to the LCA results, the environmental benefits (up to one order of magnitude per indicator) are evident when compared to manufacturing processes utilizing raw materials, even though the recycling of steel from ship waste is still hazardous and harmful from a social perspective. In summary, the most critical phase of the ship recycling process involves rerolling, followed by in-yard processing and ship cutting. The authors claimed that using rebar made from ship recycling scraps saved 16,492 MJ worth of resources and avoided 1,965 kgCO₂-eq emissions per ton of final product.

In their publication, Ko and Gantner (2016) used LCA for the quantification of the environmental impacts of a vessel, coupling this result with economic benefit of each phase of the vessel life cycle. The goal of this study was to determine the added value of ship operations (*i.e.*, shipbuilding, operations, and shipbreaking) in various geographical areas. ~~The authors underlined that ship owners benefit the most during their the vessel use phase, whereas Asian ship producers and dismantlers have to bear comparatively more environmental impacts per unit of added value.~~ environmental burdens per unit of added value are significantly higher for Asian ship builders and wreckers. The analysis was conducted using the functional unit of “one ship with a light displacement tonnage (LDT) of 4,108.4 over the lifetime of 25 years”. GaBi software was used for both computational analysis and background data. Two impact categories were chosen to display the environmental results, *i.e.*, CC base on ReCiPe and HTP-non cancer based on USEtox method. Unfortunately, the LCA results were not reported within the paper, but only aggregated results.

Following their first publication dealing with yachts, the second work of Önal et al. (2020) focused on the end of life of steel hull boats, using a functional unit of “a ship of its kind built in the Tuzla Shipyards Zone, Istanbul, Turkey, and recycled in the Aliğa Ship Recycling Zone, İzmir, Turkey during 2008–2018”. SimaPro software tool was used for the computational analysis and CML-IA method was adopted for LCIA. ~~On the other hand, analysing the results for the steel hull, the shipbuilding phase is prominent compared with material recycling in almost all impact categories.~~ The shipbuilding phase for the steel hull gained higher environmental impacts when compared to material recycling processes. It is worth noticing that the system boundaries of the ship recycling process do not include the benefits related to the recycled material. Moreover, boats with complex shapes (fishing boats, yachts and sailboats) generates a higher environmental impact than ships with more regular shapes such as barge, tanker, bulk carrier, passenger and service boats. Thus, designing an easy-to-dismantle ship in terms of energy (for all the shipbreaking activities) and materials results in eco-friendly shipbuilding and ship recycling. ~~In conclusion, shipbreaking is a critical part of the vessel life cycle and it needs~~

to be included within the vessel analysis. In conclusion, shipbreaking is a crucial stage in the life cycle of a vessel and must be taken into account for a cradle-to-grave approach. Even if the impacts related to this phase are not negligible, shipbreaking activities are critical to manage due to the long lifespan of a vessel and the uncertainty related to the vessel's end-of-life. Vessel typologies and materials to manufacture the vessel are also of interest in the assessment of EoL performances.

4. Conclusion

In this review, the scientific literature concerning LCA studies applied to the naval sector has been investigated using two approaches perspectives: a bibliometric analysis and the main trends of the studies have been examined in the first part (Mio et al., 2022), while a quantitative analysis of the outcomes of the assessments has been performed in the second part. In the first section, a bibliometric analysis and the main trends of the research were analysed (Mio et al., 2022), while in the second section, a quantitative analysis and normalization of the LCA outcomes were undertaken.

The second part of this review focused on the quantitative analysis of the outcomes of the scientific literature dealing with LCA studies applied to the naval sector. Before delving into the descriptions of the assessments, the introduction of the normalization stage outlined in the ISO standard has been carried out, and a list of suggestions for naval practitioners has been compiled. The first recommendation prescribed to disaggregate the overall life cycle impacts of the vessel into the impacts specific for each life cycle phase (i.e., shipbuilding, operation, maintenance and disposal). A peculiar normalization basis has been suggested for each life cycle phase, aiming at producing consistent results among different studies, allowing future comparisons. Shipbuilding, manufacturing and disposal impacts should be normalized on lightship weight and lifetime of the vessel, allowing for comparisons focused on construction materials and good manufacturing practices rather than ship size dimension. The results presented hereafter provide a comparison of LCA analysis.

Operational phase impacts (as well as overall life cycle ones) may be normalized using a vertical or a horizontal approach. The former is based on the function provided by each specific vessel group and allows to identify the emerging trend and some benchmark values for practitioners dealing with peculiar vessel categories. The latter provide the Efficiency Ratio, which enables a comparison between the operational activities of vessels belonging to any vessel category. should be normalized according to the specific purpose of each vessel type, as shown in the dedicated sections of this review. This enables the adoption of engineering eco-design actions to promote cleaner ship development and use.

The 47 articles, selected using the procedure reported in the first part of this review (Mio et al., 2022), have been classified according to vessel types (using CPC codes), reporting a description of the assessments and the results of GHG-related impact categories, which have been subjected to the proposed normalization procedures. Two types of normalization were proposed in this review: the first one (called vertical normalization) allows a comparison of ships within a specific group (e.g., ferries, cargos, tankers, etc.); the second one called (horizontal normalization) provides an index to investigate the environmental performances among the different vessel typologies.

It is possible to establish some benchmark values for each stage of the vessels lifecycle in relation to the vessel category by looking at the results of the vertical normalization. Indeed, without normalization, the identification of average scores for each lifecycle phase is quite challenging, as the outcomes are hardly comparable due to different functional units, system boundaries and allocation models. Taking into account the outcomes from the publications dealing with hulls or entire vessels, the shipbuilding GHG-related impacts can be compared in terms of shipbuilding materials (i.e., steel, aluminium, wood and composite material), as shown in Figure 6. It appears clear how steel-made vessels gained better average performance in comparison with vessels built using other materials. The assessments dealing with large ships (cruise, tanker, and cargo)

are driving this general trend, as there is a benefit associated to economies of scale, the use of diverse materials is impractical and more assumptions must be made during the life cycle inventory gathering process, which may lead to an underestimation of the emissions. When steel is used for smaller vessels (e.g., pleasure boats), the shipbuilding specific impact increases. The assessment of various shipbuilding materials within the same study was limited to smaller vessels, typically pleasure boats or small ferries. As expected, wooden boats generate the lowest GHG-emissions. They are usually followed by composite materials, depending on the materials used in their production and the shipbuilding technique (hand lay-up or vacuum infusion) adopted. Additional research is still needed to fully understand which manufacturing practice performed better, although vacuum infusion appears to be the most promising. When compared to other materials, aluminium performed the worst, making it the most burdensome material for shipbuilding. This is primarily owing to the carbon footprint of raw aluminium, which requires a significant amount of energy for extraction and purification. In this regard, the use of secondary aluminium would have significantly reduced the vessel's environmental impact, as documented in another publication (Mio et al., 2021).

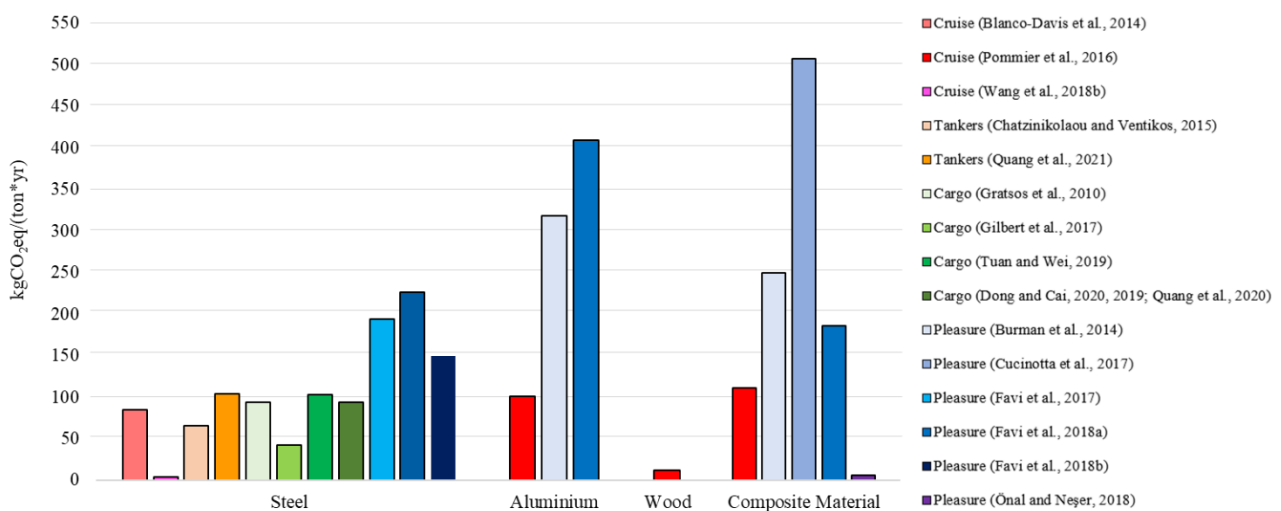


Figure 6: GHG-related normalized scores for several vessels' construction materials.

The benchmark values for the vertical normalization and the horizontal normalization of GHG-related impact categories are both presented in Table 9. Using vertical normalization, the operating phase impacts are not comparable across vessel classifications since they must be tailored to the purpose of each vessel. It is clear that a benchmark can be set for each vessel type when the user is considering the operational phase. For instance, a magnitude of 10^{-2} - $10^{-1} \frac{kgCO_2eq}{pass*km}$ is observed for cruise and ferry boats. On the other hand, a magnitude of 10^{-3} - $10^{-2} \frac{kgCO_2eq}{ton*km}$ is observed for tankers and cargo vessels, while a magnitude of 10^2 - $10^3 \frac{kgCO_2eq}{pass*hr}$ is observed for pleasure and sporting boats. These benchmark values can be adopted to investigate novel technologies and alternative fuels that allow reducing the environmental load of vessels based on their purpose.

Table 9: GHG-related emission ranges for the publications within each vessel category

Vessel type	CPC code	Operational phase GHG-related score (vertical normalization)	Unit	Efficiency Ratio (horizontal normalization)	Unit
Cruise and ferry boats	49311	$10^{-2} - 10^{-1}$	$\frac{kgCO_2eq}{pass * km}$	$10^{-3} - 10^{-2}$	$\frac{\% kgCO_2eq}{kW ton}$
Tankers	49312	$10^{-3} - 10^{-2}$	$\frac{kgCO_2eq}{ton * km}$	$10^{-2} - 10^{-1}$	

Cargo vessels	49314	$10^{-3} - 10^{-2}$	$\frac{kgCO_2eq}{ton * km}$	10^{-1}	
Pleasure and sporting boats	494	$10^2 - 10^3$	$\frac{kgCO_2eq}{pass * hr}$	$10^{-4} - 10^{-2}$	

The index developed for the horizontal normalization (Efficiency Ratio), clearly rates the cargo vessels as the most efficient ships in terms of environmental load for the operational phase providing a benchmark of $10^{-1} \frac{\% kgCO_2eq}{kW ton}$ which can serve as a reference to develop other type of vessels with significant improvements towards a higher environmental sustainability. The construction of recreational and sports boats demonstrates the necessity for greater care in their conception and design. In particular, the use of very powerful engines in comparison to the weight of the vessel leads to higher inefficiency during navigation, which, from a life cycle perspective, greatly increases the incidence of the operational phase.

To sum up, despite previous attempts, the scientific literature still lacks a normalization method for measuring the environmental performance of shipbuilding activities that covers all manufacturing and maintenance procedures aside from welding. In general, the environmental impacts related to raw materials used for hull and machinery constructions have been included within LCA studies, along with the related manufacturing processes (*i.e.*, cutting, bending, welding). This approach left the maintenance practices, which are quite relevant in shipyards activities, still affected by a higher degree of uncertainty. The maritime sector's vessel disposal processes are still fairly unknown or uncertain. The life cycle assessments utilizing a cradle-to-grave perspective lack homogeneity in allocation models, preventing a meaningful comparison of the outcomes.

This critical analysis contributes to the body of literature by collecting representative LCA publications in the naval industry for various vessel categories. This review identifies which naval vessels have been considered in previous LCA studies, reports the development and the assumptions of each work, collects the outcomes for GHG-related impacts, and offers some recommendations for future life cycle assessments in terms of functional unit selection, system boundaries, LCA approach, and results normalization and presentation.

5. References

- Abdou, K., Gascuel, D., Aubin, J., Romdhane, M.S., Ben Rais Lasram, F., Le Loc'h, F., 2018. Environmental life cycle assessment of seafood production: A case study of trawler catches in Tunisia. *Sci. Total Environ.* 610–611, 298–307. <https://doi.org/10.1016/j.scitotenv.2017.08.067>
- Abdou, K., Le Loc'h, F., Gascuel, D., Romdhane, M.S., Aubin, J., Ben Rais Lasram, F., 2020. Combining ecosystem indicators and life cycle assessment for environmental assessment of demersal trawling in Tunisia. *Int. J. Life Cycle Assess.* 25, 105–119. <https://doi.org/10.1007/s11367-019-01651-5>
- Andersson, K., Winnes, H., 2011. Environmental trade-offs in nitrogen oxide removal from ship engine exhausts. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 225, 33–42. <https://doi.org/10.1243/14750902JEME223>
- Barbera, E., Mio, A., Pavan, A.M., Bertucco, A., Fermeglia, M., 2022. Fuelling power plants by natural gas: An analysis of energy efficiency, economical aspects and environmental footprint based on detailed process simulation of the whole carbon capture and storage system. *Energy Convers. Manag.* 252. <https://doi.org/10.1016/j.enconman.2021.115072>
- Bicer, Y., Dincer, I., 2018a. Environmental impact categories of hydrogen and ammonia driven transoceanic maritime vehicles: A comparative evaluation. *Int. J. Hydrogen Energy* 43, 4583–4596. <https://doi.org/10.1016/j.ijhydene.2017.07.110>

- Bicer, Y., Dincer, I., 2018b. Clean fuel options with hydrogen for sea transportation: A life cycle approach. *Int. J. Hydrogen Energy* 43, 1179–1193. <https://doi.org/10.1016/j.ijhydene.2017.10.157>
- Blanco-Davis, E., del Castillo, F., Zhou, P., 2014. Fouling release coating application as an environmentally efficient retrofit: a case study of a ferry-type ship. *Int. J. Life Cycle Assess.* 19, 1705–1715. <https://doi.org/10.1007/s11367-014-0780-8>
- Burman, M., Kutteneuler, J., Stenius, I., Garme, K., Rosén, A., 2014. Comparative Life Cycle Assessment of the hull of a high-speed craft. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 230, 378–387. <https://doi.org/10.1177/1475090215580050>
- Chatzinikolaou, S.D., Ventikos, N.P., 2015. Holistic framework for studying ship air emissions in a life cycle perspective. *Ocean Eng.* 110, 113–122. <https://doi.org/10.1016/j.oceaneng.2015.05.042>
- Choi, J.K., Kelley, D., Murphy, S., Thangamani, D., 2016. Economic and environmental perspectives of end-of-life ship management. *Resour. Conserv. Recycl.* 107, 82–91. <https://doi.org/10.1016/j.resconrec.2015.12.007>
- Cucinotta, F., Guglielmino, E., Sfravara, F., 2017. Life cycle assessment in yacht industry: A case study of comparison between hand lay-up and vacuum infusion. *J. Clean. Prod.* 142, 3822–3833. <https://doi.org/10.1016/j.jclepro.2016.10.080>
- Cucinotta, F., Raffaele, M., Salmeri, F., Sfravara, F., 2021. A comparative Life Cycle Assessment of two sister cruise ferries with Diesel and Liquefied Natural Gas machinery systems. *Appl. Ocean Res.* 112, 102705. <https://doi.org/10.1016/j.apor.2021.102705>
- Department of Economic and Social Affairs, U.N., 2015. Central Product Classification (CPC) Version 2.1. New York.
- Dong, D.T., Cai, W., 2020. Life-cycle assessment of ships: The effects of fuel consumption reduction and light displacement tonnage. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 234, 143–153. <https://doi.org/10.1177/1475090219858810>
- Dong, D.T., Cai, W., 2019. A comparative study of life cycle assessment of a Panamax bulk carrier in consideration of lightship weight. *Ocean Eng.* 172, 583–598. <https://doi.org/10.1016/j.oceaneng.2018.12.015>
- Dvarioniene, J., Zobelaitė-Noreikiene, G., Kruopiene, J., Stasiškiene, Ž., 2013. Application of the life-cycle assessment method for pollution prevention in Klaipėda Sea Port, Lithuania. *J. Coast. Res.* 29, 1083–1091. <https://doi.org/10.2112/JCOASTRES-D-11-00167.1>
- Favi, C., Campi, F., Germani, M., Mandolini, M., 2019a. A data framework for environmental assessment of metal arc welding processes and welded structures during the design phase. *Int. J. Adv. Manuf. Technol.* 105, 967–993. <https://doi.org/10.1007/s00170-019-04278-w>
- Favi, C., Campi, F., Germani, M., Manieri, S., 2018a. Using design information to create a data framework and tool for life cycle analysis of complex maritime vessels. *J. Clean. Prod.* 192, 887–905. <https://doi.org/10.1016/j.jclepro.2018.04.263>
- Favi, C., Campi, F., Mandolini, M., Germani, M., 2019b. Using engineering documentation to create a data framework for life cycle inventory of welded structures, in: *Procedia CIRP*. Elsevier B.V., pp. 358–363. <https://doi.org/10.1016/j.procir.2019.01.006>
- Favi, C., Germani, M., Campi, F., Mandolini, M., Manieri, S., Marconi, M., Vita, A., 2018b. Life Cycle Model and Metrics in Shipbuilding: How to Use them in the Preliminary Design Phases. *Procedia CIRP* 69, 523–528. <https://doi.org/10.1016/j.procir.2017.11.071>
- Favi, C., Raffaeli, R., Germani, M., Gregori, F., Manieri, S., Vita, A., 2017. A Life Cycle Model to assess costs and environmental impacts of different maritime vessel typologies. *Proc. ASME 2017 Int. Des. Eng.*

Tech. Conf. Comput. Inf. Eng. Conf. 1–12.

- Gilbert, P., Wilson, P., Walsh, C., Hodgson, P., 2017. The role of material efficiency to reduce CO2 emissions during ship manufacture: A life cycle approach. *Mar. Policy* 75, 227–237. <https://doi.org/10.1016/j.marpol.2016.04.003>
- González-García, S., Villanueva-Rey, P., Belo, S., Vázquez-Rowe, I., Moreira, M.T., Feijoo, G., Arroja, L., 2015. Cross-vessel eco-efficiency analysis. A case study for purse seining fishing from North Portugal targeting European pilchard. *Int. J. Life Cycle Assess.* 20, 1019–1032. <https://doi.org/10.1007/s11367-015-0887-6>
- Gratsos, G.A., Psaraftis, H.N., Zachariadis, P., 2010. Life-cycle co2 emissions of bulk carriers: A comparative study. *Trans. R. Inst. Nav. Archit. Part A Int. J. Marit. Eng.* 152. <https://doi.org/10.3940/rins.ijme.2010.a3.176>
- Gratsos, G.A., Zachariadis, P., 2005. Life cycle cost of maintaining the effectiveness of a ship's structure and environmental impact of ship design parameters, in: RINA, Royal Institution of Naval Architects International Conference - Design and Operation of Bulk Carriers. pp. 95–122.
- Jang, H., Jeong, B., Zhou, P., Ha, S., Nam, D., Kim, J., Lee, J. ung, 2020. Development of Parametric Trend Life Cycle Assessment for marine SOx reduction scrubber systems. *J. Clean. Prod.* 272, 122821. <https://doi.org/10.1016/j.jclepro.2020.122821>
- Jeong, B., Wang, H., Oguz, E., Zhou, P., 2018. An effective framework for life cycle and cost assessment for marine vessels aiming to select optimal propulsion systems. *J. Clean. Prod.* 187, 111–130. <https://doi.org/10.1016/j.jclepro.2018.03.184>
- Kjær, L.L., Pagoropoulos, A., Hauschild, M., Birkved, M., Schmidt, J.H., McAloone, T.C., 2015. From LCC to LCA using a hybrid Input Output model - A maritime case study, in: *Procedia CIRP*. Elsevier, pp. 474–479. <https://doi.org/10.1016/j.procir.2015.02.004>
- Ko, N., Gantner, J., 2016. Local added value and environmental impacts of ship scrapping in the context of a ship's life cycle. *Ocean Eng.* 122, 317–321. <https://doi.org/10.1016/j.oceaneng.2016.05.026>
- Ling-Chin, J., Roskilly, A.P., 2016a. Investigating a conventional and retrofit power plant on-board a Roll-on/Roll-off cargo ship from a sustainability perspective - A life cycle assessment case study. *Energy Convers. Manag.* 117, 305–318. <https://doi.org/10.1016/j.enconman.2016.03.032>
- Ling-Chin, J., Roskilly, A.P., 2016b. Investigating the implications of a new-build hybrid power system for Roll-on/Roll-off cargo ships from a sustainability perspective – A life cycle assessment case study. *Appl. Energy* 181, 416–434. <https://doi.org/10.1016/j.apenergy.2016.08.065>
- Ling-Chin, J., Roskilly, A.P., 2016c. A comparative life cycle assessment of marine power systems. *Energy Convers. Manag.* 127, 477–493. <https://doi.org/10.1016/j.enconman.2016.09.012>
- Mio, A., Bertagna, S., Cozzarini, L., Laurini, E., Bucci, V., Marinò, A., Fermeglia, M., 2021. Multiscale modelling techniques in life cycle assessment: Application to nanostructured polymer systems in the maritime industry. *Sustain. Mater. Technol.* 29, e00327. <https://doi.org/10.1016/J.SUSMAT.2021.E00327>
- Nian, V., Yuan, J., 2017. A method for analysis of maritime transportation systems in the life cycle approach – The oil tanker example. *Appl. Energy* 206, 1579–1589. <https://doi.org/10.1016/j.apenergy.2017.09.105>
- Önal, M., Neşer, G., 2018. End-of-life alternatives of glass reinforced polyester boat hulls compared by LCA. *Adv. Compos. Lett.* 27, 134–141. <https://doi.org/10.1177/096369351802700402>
- Önal, M., Neşer, G., Gürsel, K.T., 2020. Environmental impacts of steel ship hulls building and recycling by life cycle assessment (LCA). *Ships Offshore Struct.* <https://doi.org/10.1080/17445302.2020.1816706>

- Park, T., So, S., Jeong, B., Zhou, P., Lee, J. ung, 2020. Life cycle assessment for enhanced Re-liquefaction systems applied to LNG carriers; effectiveness of partial Re-liquefaction system. *J. Clean. Prod.* <https://doi.org/10.1016/j.jclepro.2020.124832>
- Pommier, R., Grimaud, G., Prinçaud, M., Perry, N., Sonnemann, G., 2016. Comparative environmental life cycle assessment of materials in wooden boat ecodesign. *Int. J. Life Cycle Assess.* 21, 265–275. <https://doi.org/10.1007/s11367-015-1009-1>
- Quang, P.K., Dong, D.T., Hai, P.T.T., 2021. Evaluating environmental impacts of an oil tanker using life cycle assessment method. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 235, 705–717. <https://doi.org/10.1177/1475090221989195>
- Quang, P.K., Dong, D.T., Van, T.V., Hai, P.T.T., 2020. Greenhouse gas emissions of a cargo ship from a life cycle perspective. *Int. J. Environ. Sci. Dev.* 11, 347–351. <https://doi.org/10.18178/IJESD.2020.11.7.1274>
- Rahman, S.M.M., Handler, R.M., Mayer, A.L., 2016. Life cycle assessment of steel in the ship recycling industry in Bangladesh. *J. Clean. Prod.* 135, 963–971. <https://doi.org/10.1016/j.jclepro.2016.07.014>
- Ramos, S., Vázquez-Rowe, I., Artetxe, I., Moreira, M.T., Feijoo, G., Zufía, J., 2011. Environmental assessment of the Atlantic mackerel (*Scomber scombrus*) season in the Basque Country. Increasing the timeline delimitation in fishery LCA studies. *Int. J. Life Cycle Assess.* 16, 599–610. <https://doi.org/10.1007/s11367-011-0304-8>
- Sujauddin, M., Koide, R., Komatsu, T., Hossain, M.M., Tokoro, C., Murakami, S., 2015. Characterization of ship breaking industry in Bangladesh. *J. Mater. Cycles Waste Manag.* 17, 72–83. <https://doi.org/10.1007/s10163-013-0224-8>
- Tchertchian, N., Millet, D., Yvars, P.A., 2016. The influence of the level of definition of functional specifications on the environmental performances of a complex system. EcoCSP approach. *Int. J. Sustain. Eng.* 9, 277–290. <https://doi.org/10.1080/19397038.2015.1085110>
- Tchertchian, N., Yvars, P.A., Millet, D., 2013. Benefits and limits of a Constraint Satisfaction Problem/Life Cycle Assessment approach for the ecodesign of complex systems: A case applied to a hybrid passenger ferry. *J. Clean. Prod.* 42, 1–18. <https://doi.org/10.1016/j.jclepro.2012.10.048>
- The International Standards Organisation, 2021. ISO 14044 Environmental management - Life cycle assessment - Requirements and guidelines.
- Tuan, D.D., Wei, C., 2019. Cradle-to-gate life cycle assessment of ships: A case study of Panamax bulk carrier. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 233, 670–683. <https://doi.org/10.1177/1475090218813731>
- Villeneuve, J., 2007. <http://forwast.brgm.fr/>.
- Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018a. Optimisation of operational modes of short-route hybrid ferry: A life cycle assessment case study. *Marit. Transp. Harvest. Sea Resour.* 2, 961–970.
- Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018b. Life cycle cost and environmental impact analysis of ship hull maintenance strategies for a short route hybrid ferry. *Ocean Eng.* 161, 20–28. <https://doi.org/10.1016/j.oceaneng.2018.04.084>
- Wang, H., Zhou, P., 2018. Systematic evaluation approach for carbon reduction method assessment – A life cycle assessment case study on carbon solidification method. *Ocean Eng.* 165, 480–487. <https://doi.org/10.1016/j.oceaneng.2018.07.050>
- Wang, H., Zhou, P., Liang, Y., Jeong, B., Mesbahi, A., 2020. Optimization of tugboat propulsion system configurations: A holistic life cycle assessment case study. *J. Clean. Prod.* 259, 120903. <https://doi.org/10.1016/j.jclepro.2020.120903>

Ziegler, F., Groen, E.A., Hornborg, S., Bokkers, E.A.M., Karlsen, K.M., de Boer, I.J.M., 2018. Assessing broad life cycle impacts of daily onboard decision-making, annual strategic planning, and fisheries management in a northeast Atlantic trawl fishery. *Int. J. Life Cycle Assess.* 23, 1357–1367. <https://doi.org/10.1007/s11367-015-0898-3>

Zuin, S., Belac, E., Marzi, B., 2009. Life cycle assessment of ship-generated waste management of Luka Koper. *Waste Manag.* 29, 3036–3046. <https://doi.org/10.1016/j.wasman.2009.06.025>

Wordcount: 8167

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Bibliometric analysis and characteristics of the studies

Andrea Mio^{a*}, Maurizio Fermeglia^a, Claudio Favi^b

a. MolBNL@UniTS, Department of Engineering and Architecture, University of Trieste, Italy

b. Department of Engineering and Architecture, University of Parma, Italy

* Corresponding author e-mail: amio@units.it

Abstract

Most of the actual industrial research efforts are aimed at reducing environmental burdens associated with human activities in the context of sustainable development. This trend has become increasingly prevalent in the naval transportation sector shown by a growing number of scientific publications dealing with life cycle assessments of maritime-related activities. However, the life cycle assessment framework provides practitioners with a variety of alternatives for conducting the analyses, giving room for defining key factors, such as functional units, system boundaries, and impact assessment methods, among others. This lack of standardization resulted in a wide range of assumptions and findings that are seldom comparable. The goal of this review is providing a systematic literature analysis, focusing on the characteristics of life cycle assessments dealing with the environmental impacts of various maritime vessel categories. In the first part, a qualitative analysis of the available scientific literature has been performed, providing a bibliometric analysis and a general overview of the characteristics of the studies (*i.e.*, life cycle impact assessment methodologies, background data, and software tools used). The outcomes of the bibliometric analysis are then summarized and discussed to understand current practices and future trends in this field, providing the basis for the normalization phase of the results. The second section of the paper offers advice for naval practitioners on how to perform results normalization to produce comparable analyses. Two approaches for normalization have been proposed in the frame of this study: an “horizontal” one, which is based on vessel features and allows a comparison among different vessel typologies, and a “vertical” one that enables to fairly compare vessels of the same category to one another. In addition, each section reports the outcomes of greenhouse gas-related impact categories, which have been subjected to the proposed normalization procedure, along with the order of magnitude of the results for each life cycle phase. The overall work provides an overview of LCA impact results as well as a collection of procedures and recommendations for future life cycle assessments based on specific vessel types, in terms of functional unit selection, system boundary definition, impact assessment approach, presentation of the outcomes, and normalization basis.

Keywords: LCA, Life Cycle Assessment, Life Cycle Analysis, Naval, Ship, Maritime

Glossary

ADE: Abiotic Depletion of Elements

1 ADF: Abiotic Depletion of Fossil fuels
2 AP: Acidification Potential
3 CC: Climate Change
4
5 CCS: Carbon Capture and Storage
6
7 CED: Cumulative Energy Demand
8
9 CFC: ChloroFluoroCarbon
10
11 CPC: Central Product Classification
12
13 CTUe: Comparative Toxic Units ecotoxicity
14
15 CTUh: Comparative Toxic Units for human
16
17 DCB: DiChloroBenzene
18
19 ECA: Emission Control Area
20
21 EI99: EcoIndicator 99
22
23 EoL: End of Life
24
25 EP: Eutrophication Potential
26
27 ETP: EcoToxicity Potential
28
29 FD: Fossil Depletion
30
31 FETP: Freshwater EcoToxicity Potential
32
33 FEU: Freshwater EUtrophication
34
35 FU: Functional Unit
36
37 GHG: GreenHouse Gas
38
39 GWP: Global Warming Potential
40
41 HCE: Human Carcinogenic Effects
42
43 HCFC: HydroChloroFluoroCarbon
44
45 HNCE: Human Non-Carcinogenic Effects
46
47 HTP: Human Toxicity Potential
48
49 ILCD: International reference Life Cycle Data system
50
51 IMO: International Maritime Organization
52
53 IPCC: Intergovernmental Panel on Climate Change
54
55 IR: Ionising Radiation
56
57 ISO: International Organization for Standardization
58
59 LCA: Life Cycle Assessment
60
61 LCC: Life Cycle Costing
62
63 LCI: Life Cycle Inventory
64
65 LCIA: Life Cycle Impact Assessment
66
67 LNG: Liquefied Natural Gas

1 LOP: Land Occupation Potential
2 LU: Land Use
3 MD: Metal Depletion
4 METP: Marine EcoToxicity Potential
5 MEU: Marine EUtrophication
6 MSETP: Marine Sediment EcoToxicity Potential
7 N.A.: Not Applicable – Not Available
8 NMVOC: Non-Methane Volatile Organic Compounds
9 NLT: Natural Land Transformation
10 ODP: Ozone Depletion Potential
11 PM: Particulate Matter
12 PMFP: Particulate Matter Formation Potential
13 POCP: Photochemical Ozone Creation Potential
14 POFP: Photochemical Oxidant Formation Potential
15 RDE: Resource Depletion of Elements
16 RDF: Resource Depletion of Fossil fuels
17 RE: Respiratory Effect
18 RoRo: Roll-on/roll-off
19 S: Smog
20 SLCA: Social Life Cycle Assessments
21 TETP: Terrestrial EcoToxicity Potential
22 TEU: Terrestrial EUtrophication
23 TRACI: Tool for Reduction and Assessment of Chemicals and other environmental Impacts
24 TTW: Tank-To-Wake
25 ULCC: Ultra Large Crude Carrier
26 VLCC: Very Large Crude Carrier
27 VOC: Volatile Organic Compound
28 WTT: Well-To-Tank
29 WTW: Well-To-Wake
30 WUD: Water Use Depletion
31
32 **Locations**
33
34 CAN: Canada
35
36 CHN: China
37
38 DEU: Germany
39
40 DNK: Denmark
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 ESP: Spain
2 EU: Europe/European
3
4 FRA: France
5
6 GBR: Great Britain
7
8 GRC: Greece
9
10 ITA: Italy
11
12 KOR: South Korea
13
14 LTU: Lithuania
15
16 NLD: Netherlands
17
18 NOW: Norway
19
20 QAT: Qatar
21
22 PER: Perù
23
24 PRT: Portugal
25
26 SLO: Slovenia
27
28 SWE: Sweden
29
30 TUN: Tunisia
31
32 TUR: Turkey
33
34 USA: United States of America
35
36 VNM: Vietnam
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1. Introduction

The maritime transportation industry is undergoing a transformation to become more economically, socially, and ecologically sustainable. It is common knowledge that marine vessels' activities have significant environmental consequences such as greenhouse gas emissions, air pollution, underwater noise, oil contamination, etc. The International Maritime Organization (IMO) is responsible for the safety and security of global shipping, promoting several measures to protect the marine environment from the ecological impacts of shipping activities, *e.g.*, preventing emissions of GreenHouse Gas (GHG) (IMO - Marine Environment Protection Committee, 2020) or NOx (IMO - International Maritime Organization, 2019). As a result, in recent years, researchers, practitioners, and maritime firms have all employed a life cycle approach to examine the environmental risks related to goods transported by sea. Indeed, it is critical to examine both the shipping and shipbuilding characteristics in order to achieve a greener marine sector. The life cycle assessment (LCA) approach is consistent with the key concepts of green shipbuilding, which are represented by the so-called "triple R's": (i) reducing materials, energy consumption, and pollutant emissions during ship manufacturing, (ii) recycling almost all ship maintenance components, and (iii) reusing the majority of ship's materials during its disposal. The primary goal of green manufacturing is to reduce material waste while also picking new and more sustainable materials that can bring benefits, such as nano-engineered thermoplastic polymers (Mio et al., 2021) or greener processing methods and improved life cycle assessment outcomes.

Since the growing interest of the international community in environmental pollution and the rise of the LCA methodology in the last two decades, several works have been developed with the goal of understanding, characterizing, and implementing corrective actions to offshore operations performed by marine vessels. LCA is a technique for assessing the possible environmental implications and resources required throughout a product's life cycle, beginning with raw material acquisition and continuing with manufacturing and consumption phases to waste disposal (The International Standards Organisation, 2021a). The results of life cycle analyses are reported in a variety of impact categories, with the goal of evaluating the whole range of ecological consequences associated with the life cycle of the product under investigation. The LCA framework entails four phases of implementation, which are briefly described underneath. The first is the "Goal and Scope," which allows describing the study's goal, target readers, functional unit, system boundary, data source quality, and approach assumptions and limitations. The second phase, called "Life Cycle Inventory" (LCI), involves gathering the mass and energy balances of the product system under investigation (Rebitzer et al., 2004). Following that, the inventory data are used in the "Life Cycle Impact Assessment" (LCIA) stage, which links them to specific environmental impacts using well-established emission factors. Finally, the "Interpretation" phase uses discretionary sensitivity and uncertainty analyses to interpret the data produced in the previous phases (Pennington et al., 2004). In the maritime sector, LCA-based studies have been conducted for a variety of shipping operations, including passenger transportation (ferries), commodities and fuels transportation (tankers and cargo vessels), pleasure and recreational activities (yachts), and fishing, among others. LCA has grown in maturity and methodological robustness over time, resulting in the development of an international standard (The International Standards Organisation, 2021b). However, the overarching framework for performing an LCA research provides practitioners with a variety of options for conducting the analysis. As noticed in the current literature, the lack of restrictions in constructing the LCA for the system of interest resulted in varied assumptions and outcomes. The disparity is caused primarily by the functional unit's definition, assumptions about the product's life cycle, differences in system boundaries, environmental indicators selection, and outcomes reporting. Inconsistencies persist even for the same product, making it difficult to compare findings and identify patterns in the shipbuilding industry. For instance, before the ship is delivered, the shipbuilding process includes multiple operations (raw materials acquisition and refining, component fabrication, vessel assembly, sea trials, etc.), and the available studies do not always declare what is included or not. Some attempts at sectoral standardization have been made, although they have mostly focused on specific tasks, such as developing a holistic strategy (Fet et al., 2013),

1 data retrieval and organization (Favi et al., 2019b), the development of a dedicated tool (Prinçaud et al.,
2 2010) or the definition of new impact eco-financial indicators (Ytreberg et al., 2021). As a result, there is room
3 for improvement in the application of the LCA framework in shipbuilding and vessel operations.

4 Based on a scientific literature investigation of the works already published, this critical review aims to
5 provide assistance to naval practitioners willing to perform an LCA in the naval sector. The objective of the
6 first part is presenting a bibliometric analysis of the research works in the context of LCA for different
7 maritime vessel categories. The review outcomes provide a general overview of the main trends in this sector
8 concerning LCIA methodologies, background data, and software tools that were adopted so far. Outcomes
9 are then summarised with the aim to provide specific benchmarks for the development of two normalization
10 procedures. The second part (Mio et al., 2022) includes a set of recommendations for LCA methodological
11 choices in order to promote the alignment of existing and future studies in this field on a common ground.
12 The results of greenhouse gas-related effect categories are then shown, together with the order of
13 magnitude of the results for each life cycle phase, after they have been subjected to the proposed
14 normalizing procedure. As a result, future studies will be able to determine some benchmark values to
15 compare against.

2. Methodology for the selection of contributing assessments

22 The approach used to reach the review's goal is based on a systematic literature review based on a Scopus
23 database search, which was conducted on June 29th, 2021. Scopus database was selected due to its
24 comprehensive collection of journals belonging to the naval field. The search was restricted to English-
25 language publications available in peer-reviewed journals. The keywords chosen to query the database can
26 be seen in Figure 1.

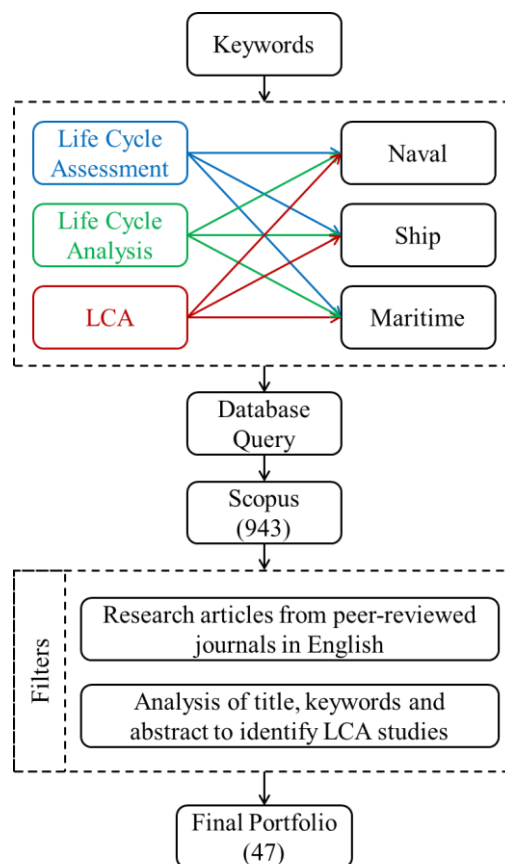


Figure 1: Decision procedure flowchart

1 To select the relevant articles, the search was conducted using the following keywords in combination with
2 Boolean operators: (“Life Cycle Assessment” OR “Life Cycle Analysis” OR “LCA”) AND (“Naval” OR “Ship” OR
3 “Maritime”). A total of 943 articles were found in Scopus. The results have been thoroughly refined using a
4 series of filters, as presented hereafter:

- 5 ● only documents from research and review articles from peer-reviewed journals in English were
6 included. Duplicated documents, book chapters, and grey literature (*i.e.*, reports, dissertation, and
7 theses) were excluded;
- 8 ● conference proceedings published on special issues of peer-review journals were included;
- 9 ● the articles not related to the topic and scope of this review were ruled out through the analysis of
10 titles, keywords, and abstracts.

11 As a result, only full articles and conference proceedings from peer-reviewed journals were examined,
12 resulting in a total of 47 publications.

13 A further refinement based on the boundaries of the product systems has been performed, discerning
14 between two major trends: (i) system boundary comprehending at least one component of the vessel (*e.g.*,
15 hull, power system, coating, naval systems, etc.); (ii) system boundary including exclusively the supply chain
16 of fuels adopted in the naval sectors, *i.e.*, Well To Wake (WTW) approach. The former studies implemented
17 a cradle-to-gate or cradle-to-grave perspective including the entire vessel or some of its components within
18 the system boundary, while the latter disregarded any part of the vessel in focusing on the fuel life cycle,
19 considering its supply chain (Well To Tank – WTT) and its consumption during the operational phase of the
20 vessel (Tank To Wake – TTW). Even though both product systems are of interest to the naval sector, they
21 deal with different perspectives, making any comparison of the two groups' results unfeasible. Therefore, a
22 review of the available literature for each separate scope appears to be more practical, with the purpose of
23 offering an overview of prior authors' benchmark values in each domain. Hence, this review focuses on the
24 products whose system boundaries comprehend at least one component of the vessel under study.
25 Additionally, the assessments focused exclusively on Life Cycle Costing (LCC) or Social Life Cycle Assessment
26 (SLCA) have been excluded, as they are outside the scope of this review.

27 The following sections deal with the qualitative analysis of the literature available, exhibiting the main
28 features characterizing the LCA publications in the maritime field. The features examined in the papers'
29 portfolio (47 articles) comprehend the number of documents per year, the authorship, the publication
30 source, the geographic location (country) where the research was conducted, the number of citations per
31 article, the LCIA methods and impact categories, the inventory database, and the software tool for
32 calculation.

33 Despite the authors do not claim this study to be free of limitations nor exhaustive, this review brings a useful
34 contribution to the addressed literature body. To the best of the authors' knowledge, no studies investigating
35 the features of LCA in the naval sector have been published yet. In the present research work, several
36 contributions will be provided:

- 37 ● a qualitative analysis of the main features of the scientific literature dealing with LCA in the naval
38 sector;
- 39 ● a quantitative indication of the environmental impact results (*e.g.*, global warming potential) for each
40 vessel type among available studies, as presented in the second part (Mio et al., 2022);
- 41 ● some recommendations towards a standardization of the future life cycle assessments, in terms of
42 the choice of functional unit, system boundaries, LCA approach, and presentation of the results.

3. Bibliometric analysis

3.1. Number of publications per year

Following the outcomes of the literature selection process (final portfolio), it is noteworthy to remark that the relevant literature covers a limited timeframe beginning in 2009. Figure 2 reports the distribution of papers considering the publication years and the number of cumulative citations during this period.

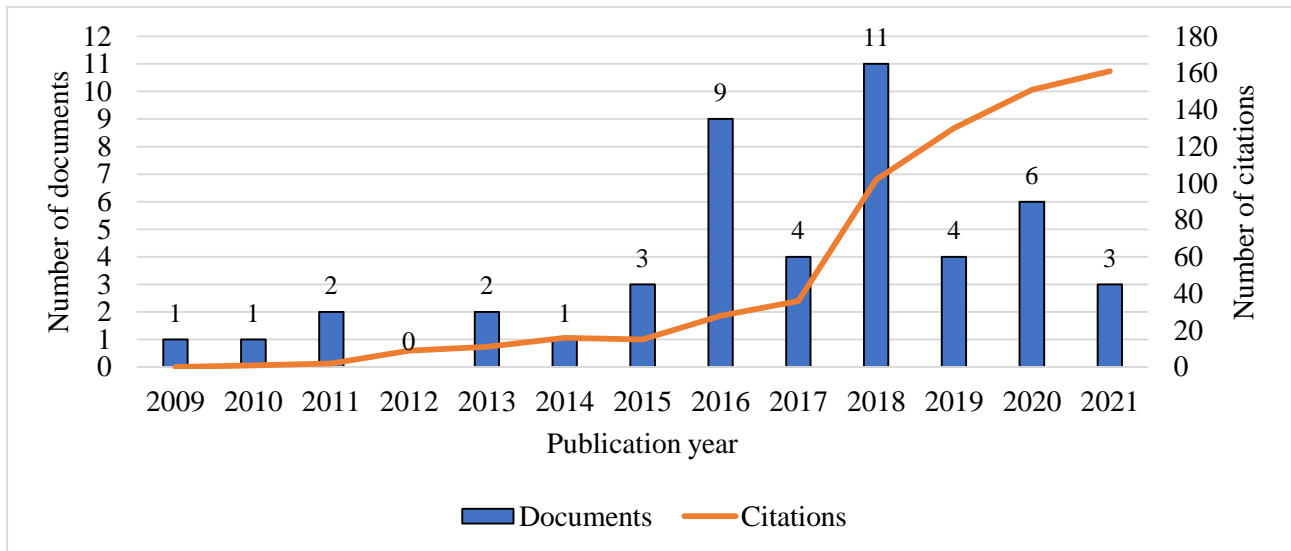


Figure 2: Overview of the number of documents and cumulative citations through the years

The overall trend increased in the last years and more than 80% of the retrieved papers were issued in the last six years. Although the graph shows a scattered distribution of papers, ranging from 0 to 11 for each year, the mean value for the overall period (2009-2021) is approx. 3.5 papers per year. Focusing on the earlier period (2009-2014) the mean value is slightly higher than 1 paper per year, while during last the six years the mean value rises to approx. 5.5 papers per year. The result of this analysis highlights that there is a growing interest in the development of LCA studies for marine vessels, which is confirmed by the increasing trend of citations in the last five years. This finding is in line with the industrial demands to develop more sustainable systems, capable of meeting new industry requirements and tackling the issue related to marine pollution and the emissions from this sector. Furthermore, the increasing use and acceptance of LCA approach contribute significantly to this goal.

3.2. Publication source

The current study considers 47 papers, published in 22 different scientific journals or peer-reviewed conference proceedings. The top 4 journals, which cover approx. 50% of the overall number of papers (24 papers out of 47), are characterized by having at least five articles each (Table 1). "Journal of Cleaner Production" is the journal with the highest number of papers, followed by "International Journal of Life Cycle Assessment", "Ocean Engineering" and "Proceedings of the Institution of Mechanical Engineers Part M: Journal of Engineering for the Maritime Environment". It is interesting to highlight the different topics covered by the above-mentioned journals. Indeed, papers published by the "International Journal of Life Cycle Assessment" are mostly related to fishery and LCA analysis of vessels belonging to fishing activities. On the other hand, works published in the other three journals belong to different types of vessels (*i.e.*, yacht, tugboat) and several vessel operations (*e.g.*, unconventional propulsion systems, alternative shipping fuels, use of scrubber systems, etc.).

Table 1: Most significant journals, with at least five papers (sorted according to the number of documents considered in the review)

Journals	Subject category	Papers	Number of citations
Journal of Cleaner Production	Business, Management and Accounting	8	138
	Environmental Science		
	Engineering		
	Energy		
Ocean Engineering	Engineering	6	92
	Environmental Science		
International Journal of Life Cycle Assessment	Environmental Science	5	102
Proceedings of the Institution of Mechanical Engineers Part M: Journal of Engineering for the Maritime Environment	Engineering	5	20
Others	Various	23	328

The most relevant subject areas of the four journals are summarized in Table 1. Except for “Proceedings of the Institution of Mechanical Engineers Part M: Journal of Engineering for the Maritime Environment”, which is Q2 for the Engineering topic, the rest of the journals are Q1 for all subject areas.

3.3. Authorship and country co-occurrence

The most productive authors are Zhou, P. (8 papers), Jeong, B. (6 papers), Wang, H. (5 papers), Favi, C. (5 papers), Germani, M. (5 papers), Campi, F. (4 papers), and Dong, D.T. (4 papers). The most active countries on LCA analysis of maritime vessels and systems are located in Europe and Asia, while American and African countries present only a few works on this topic. Among the EU countries, the most productive ones are Great Britain (13 papers), followed by Italy (8 papers), France (5 papers), and Sweden (3 papers). China (10 papers), Vietnam (5 papers), and Turkey (4 papers) are the most productive Asian countries, as shown in Figure 3.

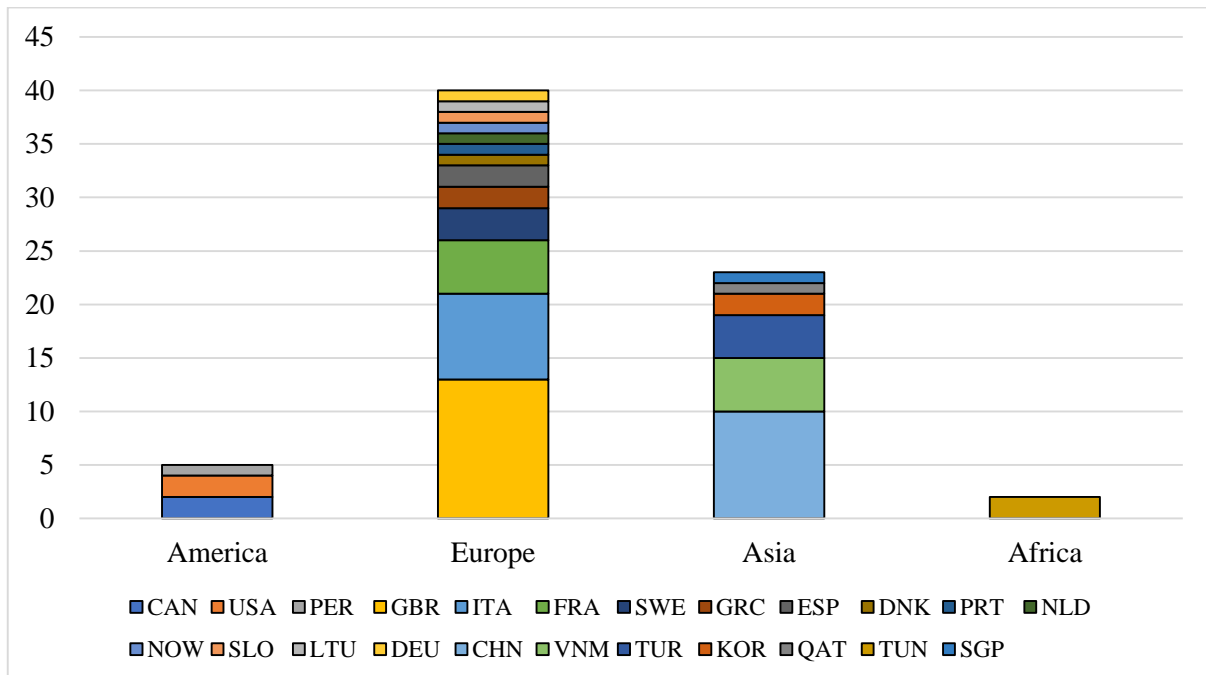


Figure 3: Number of publications per continent

Taking into consideration first authors only, researchers from European universities cover approx. 78% of the published articles on this topic, researchers from Asian universities cover approx. 14%, while researchers from American universities cover approx. 8%. It is worth to highlight that the quantity of cooperation among universities belonging to different countries is high and they account for approx. 32% (16 papers have been jointly written by two or more researchers from different countries and universities). The most active university on this topic is the University of Strathclyde (GBR) with 8 issued papers, followed by Parma University/Polytechnic University of Marche (ITA) and Vietnam Maritime University (VNM) with 5 issued papers, and Harbin Institute of Technology (CHN) with 4 issued papers. Figure 4 depicts the geographical distribution of the publications, with the true physical location of each country. The size of each nation is determined by the number of documents containing at least one affiliation inside the country, and they are coloured according to the continent to which they belong. The arrows represent documents with shared authorship between countries, and the thickness of the arrows increases as the number of shared publications increases.

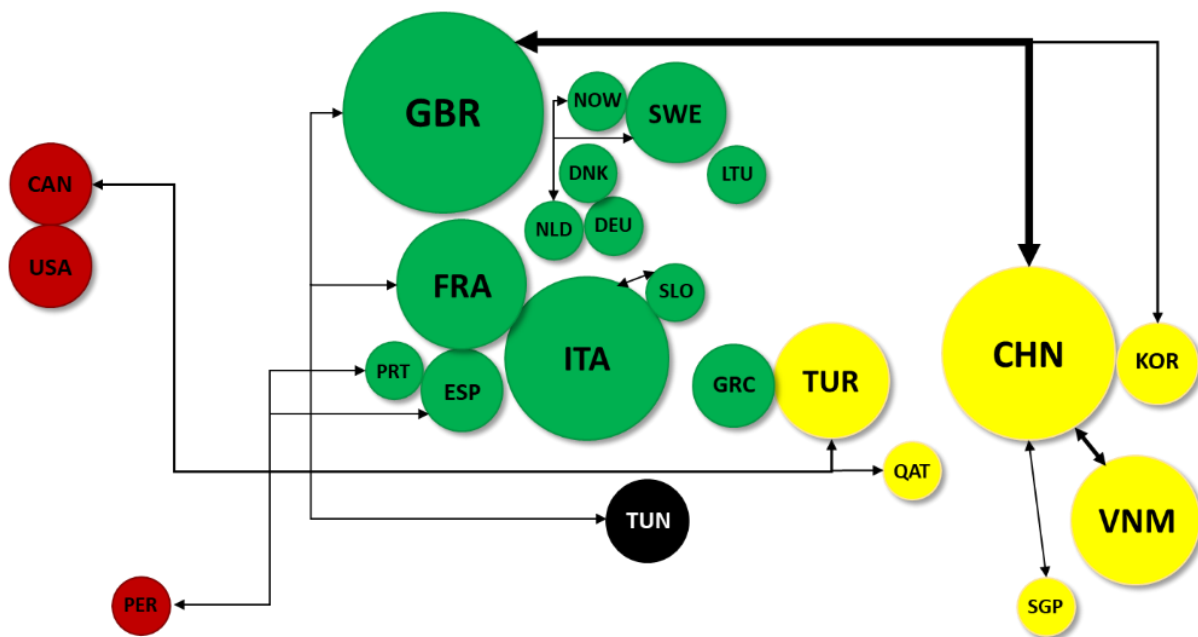


Figure 4: Geographical distribution of the issued papers

4. Main publication trends

The first part of this literature review focuses on identifying the main features and publication trends towards a normalization process of life cycle analysis in the maritime sector. section 4.1 investigates the functional units, system boundaries, and allocation methods used in the analysed works. section 4.2 reports life cycle impact assessment methods and indicators used in this field, while section 4.3 analysed background data e software tools adopted to carry out the analyses.

4.1. Functional unit, system boundaries, and allocation method

Several assumptions were introduced to conduct LCA analyses in a complex sector such as the naval one, starting from the definition of the functional units (FUs), as reported in Table 2. There is a notable lack of a comprehensive study that categorizes and prioritizes the various functional units and systems used in the maritime industry for LCA assessments. This review addresses this need, offering a starting point for future LCA research in the maritime industry to the scientific community. Beyond the type of vessel and its peculiarities, the functional units mostly differ in terms of the service lifetime and the lifecycle phases considered in the analysis. For instance, the vessel lifetime may take a wide range of values due to different manufacturing materials or different vessel applications, and consequently, the LCA outcomes may be hardly

comparable. The life cycle phases considered in the analyses face an analogous issue. Despite the fact that the bulk of study publications attempted to conduct cradle-to-grave investigations, some life cycle phases, such as maintenance or end-of-life (EoL), are usually overlooked. Detailed information about the system boundaries considered in the works analysed in this review is reported in Supplementary Materials.

Table 2: Main FUs defined per vessel category.

Vessel type	CPC code	Number of publications	FUs
Cruise and Ferry Boats	49311	8	<p>2400 passengers transported a day (Tchertchian et al., 2016, 2013)</p> <p>The vessel construction, maintenance, operation and disposal over the lifetime of 25 years (Blanco-Davis and Zhou, 2014)</p> <p>Transportation of 60 passengers and 20 bikes for 30 years (Pommier et al., 2016)</p> <p>The construction, operation, maintenance, and scrapping of alternative propulsion systems for ferry in a life span of 30 years (Jeong et al., 2018; Wang et al., 2018a)*</p> <p>The construction, operation, maintenance, and scrapping of a short route ferry in a life span of 30 years (Wang et al., 2018b)</p> <p>One ship during its lifetime (Cucinotta et al., 2021)</p>
Tankers	49312	6	<p>One average year of ship transport service (Kjær et al., 2015)</p> <p>The construction, maintenance, operation and the disposal of a tanker for a period of 25 years (Chatzinikolaou and Ventikos, 2015)</p> <p>moving one tonne of crude oil over a 1 km distance (mg-CO₂/t-km) (Nian and Yuan, 2017)</p> <p>The transportation of 1 tonne of cargo for 1 km (Bicer and Dincer, 2018a, 2018b)**</p> <p>One oil tanker with a deadweight of 74,296 tons for the transportation of crude oil by sea over its 25-year lifetime (Quang et al., 2021)</p>
LNG carriers	49313	1	<p>a system capable of re-liquefying 4000 kg of the BOG (Boil Off Gas) in an hour for 25 years (Park et al., 2020)</p>
Cargo vessel	49314	12	<p>The transport of one ton of bulk cargo over a distance of one km by sea during T years of service (20 or 30 years) (Gratsos et al., 2010)</p> <p>The operation of the hybrid power system implemented on-board a RoRo cargo ship travelling on regular routes within ECAs over a lifespan of 30 years (Ling-Chin and Roskilly, 2016a, 2016b)</p> <p>Operation of the power system for the same RoRo cargo ship travelling on regular routes over 30 years (Ling-Chin and Roskilly, 2016c)</p> <p>Two hulls used for a duration of 26 years each (Gilbert et al., 2017)</p> <p>The transportation of 1 tonne of cargo for 1 km (Bicer and Dincer, 2018a, 2018b)**</p> <p>The manufacturing, 30-year operation and disposal of a ship engine coupled with a CCS system on a bulk carrier (Wang and Zhou, 2018)</p> <p>The construction of one Panamax bulk carrier for the transportation of coal from Australia to Japan over a 25-year life cycle (Tuan and Wei, 2019)</p> <p>The transport of one ton of bulk cargo over one km by sea over a 20-year service life (Dong and Cai, 2020, 2019; Quang et al., 2020)</p>

Fishing vessels	49315	5	1 ton of landed round fish/landed seafood in one year of operation (Abdou et al., 2020, 2018; González-García et al., 2015; Ramos et al., 2011; Ziegler et al., 2018)
Tug boats	49316	2	Engine construction, operation, maintenance and scrapping (Jeong et al., 2018)* Tugboat ship performance during its service (Wang et al., 2020)
Pleasure and sporting boats	494	6	One high-speed patrol craft (TTRB-2000) hull during 25 years of service (Burman et al., 2014) The hull manufacturing and usage for 25 years of service (Cucinotta et al., 2017) The maritime operational activities and the transportation of persons and goods by sea for a period of 20 years (Favi et al., 2017) The construction and the disposal of a vessel for the transportation of persons and goods and/or operational activities by sea for a period of T years (Favi et al., 2018a, 2018b) the complete life cycle of 11 m long GRP boat hull; produced in Izmir (Turkey), excluding operation stage of the boat and recycled in a Turkish state-of-the-art recycling system (Önal and Neşer, 2018)
Others		10	FUs not provided or not clearly defined within the paper

* The publication of Jeong et al. (2018) developed two case studies (a ferry and a tugboat)

** The publications of Bicer and Dincer (2018b, 2018a) deal with several vessel categories (tankers and cargo vessels)

Another key element of articles in this field is the authors' choice of the allocation system model, which should match the declared assessment's goal. As a result of the use of various allocation models among the published assessments, the outcomes are inconsistent and incomparable, particularly when dealing with the EoL phase. Most of the works analysed in this review did not clearly report the allocation model adopted to conduct the LCA analysis. Following a thorough examination of each publication, the "Allocation Cut-off" model was the most widely used strategy, with only a few adopting the "Allocation at the Point of Substitution" model and none using the "Consequential" one. Based on this first analysis, as a general guideline, the selection of a coherent allocation model is essential to standardize the results of LCA analyses in the naval field, with the "Allocation Cut-off" as the most suitable model for this product category. The FU definition should be lifetime-independent, which implies that the operational phase outcomes shall be reported on a yearly basis to allow for future comparisons. Furthermore, the adoption of a cradle-to-grave approach is required to normalize the results across the many investigations, with the outcomes organized to highlight the impacts of the various stages of the vessel's lifecycle (*i.e.*, materials & manufacturing, operation, maintenance, and EoL).

Additionally, the vessel category is crucial for establishing a suitable and consistent FU. When the function and performance of the product system under consideration are both consistent, the normalizing procedure stands to reason. It is evident from the lifecycle assessments examined for this study that the majority of the FUs were defined with the intention of analysing a specific vessel, or at the very least a certain vessel with alternative systems (see Table 2). For cargo, ferry and fishing vessels, whose range of operations is more readily discernible, a normalization basis has already been proposed (*i.e.*, one ton of bulk cargo over one km transported by sea for the cargo vessel, one passenger over one km transported by sea for the ferry or 1 ton of landed fish for the fishing vessel). Based on the function provided by each vessel category, a normalization basis for the life cycle assessment outcomes is essential to enable a clear comparison among alternative solutions and to identify the main cause of criticalities. This topic has been discussed in detail in the second part of this review (Mio et al., 2022).

4.2. Life Cycle Impact Assessment methods

The adoption of well-established impact categories allows for the quantification of the environmental impacts caused by shipping activities. Numerous impact categories are available in the literature, each one related to specific environmental compartments and harms. Every substance known to have a harmful effect on the compartment addressed by a specific impact category is assigned a characterisation factor that is proportional to the substance's impact. The impact categories have been embedded into several LCIA methods, which include a variety of impacts, in order to present a comprehensive picture. The most used methods in the naval sector are CML-IA (de Bruijn et al., 2002), EcoIndicator 99 (EI99) (Goedkoop and Spriensma, 2000), ILCD (EC-JRC, 2012), Impact 2002+ (Jolliet et al., 2003), ReCiPe (Huijbregts et al., 2017) both midpoint and endpoint, and TRACI (Bare, 2011). Figure 5 shows the occurrence of each method along with direct emissions, *i.e.*, where the authors did not use any LCIA methods, but rather present the direct emissions of the life cycle.

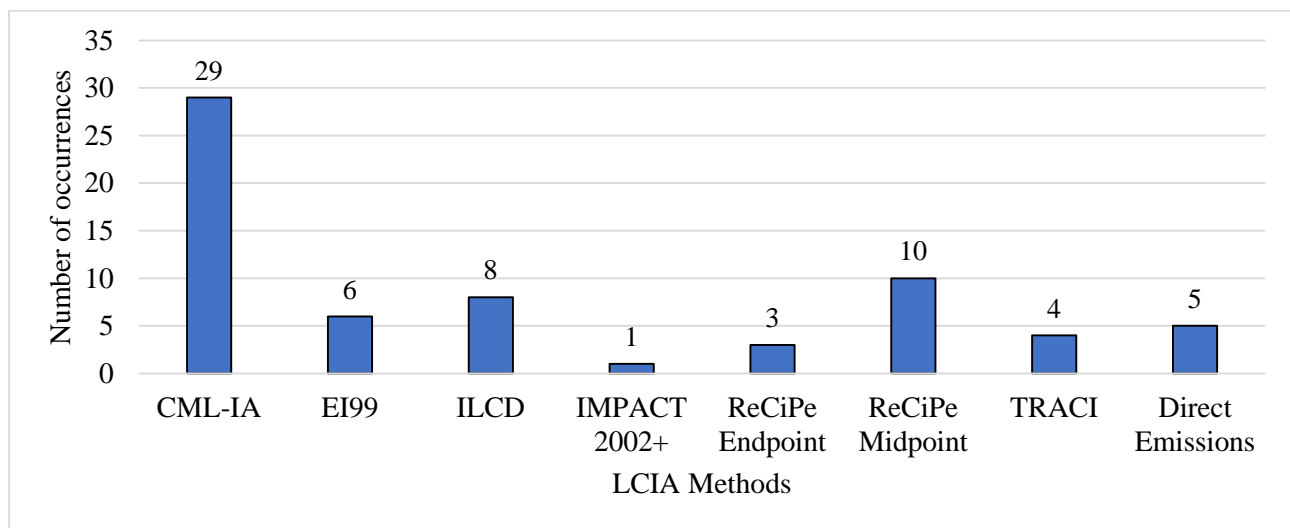


Figure 5: LCIA methods used in the papers under investigation

Even if some of the impact categories are similar or address the same issue, each LCIA method has its own list of impact categories. The ones included within the LCIA methods considered are briefly presented:

- Abiotic (or Resource) Depletion of Elements (ADE, RDE) and Metal Depletion (MD): reflects a decline in the amount of non-renewable and renewable abiotic resources accessible for human use. It is quantified by CML-IA (CML-ADE) and ILCD (ILCD-ADE) using [kg Sb-eq], while ReCiPe (Re-MD) focuses on the depletion of metals only, using [kg Fe-eq].
- Abiotic (or Resource) Depletion of Fossil Fuels (ADF, RDF) and Fossil Depletion (FD): represents a decrease in the amount of fossil fuels available for human use. It is used by CML-IA (CML-ADF measured in MJ), ReCiPe (Re-FD in [kg oil-eq]) and ILCD (ILCD-RDF in [MJ]).
- Acidification Potential (AP): reflects the detrimental acidic consequences of the life cycle emissions on atmosphere, water or soil. It is comprehended within CML-IA (CML-AP) and ReCiPe (Re-AP), where is measured in [kg SO₂-eq], and within ILCD (IL-AP) and TRACI (TR-AP), where is expressed in [mol H⁺-eq].
- Climate Change (CC)/Global Warming Potential (GWP): represents the effects of greenhouse gas (GHG) emissions on heat absorption, leading in higher temperatures in the lower atmosphere and climate change, which is a severe danger to world ecosystems. It is commonly calculated based on the GWP over a 100-year time horizon (IPCC-GWP100) according to the UN Intergovernmental Panel on Climate Change (Stocker et al., 2013). It is expressed in [kgCO₂-eq] and calculated by CML-IA (CML-GWP), ILCD (ILCD-CC), ReCiPe (Re-CC) and TRACI (TR-GWP).

- 1 Cumulative Energy Demand (CED): represents the amount of energy (*e.g.*, fossil fuels, electricity)
2 required during the life cycle of the product and is expressed in MegaJoules [MJ].
- 3 Ecotoxicity Potential (ETP): depicts hazardous chemicals' detrimental impact on various natural
4 compartments, including marine (METP), freshwater (FETP) and terrestrial (TETP) ecosystems and
5 marine sediments (MSETP). CML-IA and ReCiPe adopts USES-LCA method (Van Zelm et al., 2009),
6 which defines the fate, exposure and effects of toxic emissions related to each substance involved in
7 the life cycle. They express the indicators CML-METP, CML-MSEPT, CML-FETP, CML-TETP, Re-METP,
8 Re-FETP, Re-TETP using [kg_{1,4-DCB}-eq], where DCB stands for dichlorobenzene. TR-ETP and ILCD-
9 FETP adopt [CTU_e], instead.
- 10 Eutrophication Potential (EP): shows the detrimental consequences of nitrogen and phosphorus
11 discharge into the ecosystem, in terms of overstimulating algal and aquatic plant growth. It is
12 accounted by CML-IA (CML-EP, measured using [kg PO₄-eq]); ReCiPe, that splits the contributions to
13 freshwater (Re-FEU in [kg P-eq]) and marine (Re-MEU in [kg N-eq]) compartments; TRACI, which
14 accounts for nitrogen only (TR-EU in [kg N-eq]); and ILCD, which shows three separate contributions
15 towards freshwater (ILCD-FEU in [kg P-eq]), marine water (ILCD-MEU in [kg N-eq]) and land (ILCD-
16 TEU in [kg N-eq]).
- 17 Human Toxicity Potential (HTP): covers a pollutant's intrinsic toxicity as well as its dosage when it is
18 discharged into water, air, or soil. It is measured in kilograms of 1,4-dichlorobenzene equivalents
19 [kg_{1,4-DCB}-eq] for CML-IA (CML-HTP) and ReCiPe (Re-HTP), while ILCD and TRACI split the toxicity
20 contribution between carcinogenic effects (ILCD-HCE in CTU_h and TR-HCE in [kg benzene-eq]) and
21 non-carcinogenic effects (ILCD-HNCE in [CTU_h] and TR-HNCE in [kg toluene-eq]).
- 22 Ionising Radiation (IR): is concerned with the harm to human health and ecosystems caused by
23 radioactive emissions throughout a product. It is comprised within ReCiPe (Re-IR in [kBqU235-eq])
24 and ILCD (ILCD-IR in [kg U235-eq]).
- 25 Land Occupation Potential (LOP) / Natural Land Transformation (NLT) / Land Use (LU): deals with the
26 land area required during the life cycle of the product. CML-IA measures CML-LOP in [m²yr], ReCiPe
27 (Re-NLT) in [m²], ILCD (ILCD-LU) in [points].
- 28 Ozone Depletion Potential (ODP): indicates the potential for chlorinated and brominated substances
29 to damage the stratospheric ozone layer, increasing the quantity of damaging UV radiation impacting
30 the earth's surface. ODP is expressed in [kg CFC-11-eq] by CML-IA (CML-ODP), ReCiPe (Re-ODP),
31 TRACI (TR-ODP) and ILCD (ILCD-ODP).
- 32 Particulate Matter Formation Potential (PMFP) / Particulate Matter (PM) / Respiratory Effect (RE):
33 particulate matter is a complex combination of minuscule particles. Acids (such as nitrates and
34 sulphates), organic compounds, metals, and soil or dust particles are all possible components of
35 particle pollution. Particle pollution is connected to plenty of health issues, including respiratory
36 issues. It is measured in [PM₁₀-eq], *i.e.*, particles with a size of 10 μm, by ReCiPe (Re-PMFP), in [PM_{2.5}-
37 eq], *i.e.*, particles with a size of 2.5 μm, by TRACI (TR-RE) and ILCD (ILCD-PM). ILCD also employs ILCD-
38 RE, which is measured in [disease incidence].
- 39 Photochemical Oxidant Formation Potential (POFP) / Photochemical Ozone Creation Potential
40 (POCP) / Smog (S): highlights the detrimental effects of chemicals generated in the troposphere as a
41 result of sunlight reacting with particular reactive substances derived from fossil fuel emissions.
42 Photochemical oxidants are especially hazardous to human health and the environment. CML-IA
43 expresses CML-POCP in [kg ethylene (C₂H₄)-eq], ReCiPe and ILCD make use of [kg NMVOC-eq], *i.e.*,
44 Non-Methane Volatile Organic Compounds, for measuring Re-POFP and ILCD-POCP, respectively, and
45 TRACI employs [g NO_x-eq] for TR-S.
- 46 Water Use Depletion (WUD): represents the usage of water resources and it is expressed in [kg H₂O]
47 by ILCD (ILCD-WUD).

The number of occurrences of each impact category among the documents under investigation is shown in Figure 6.

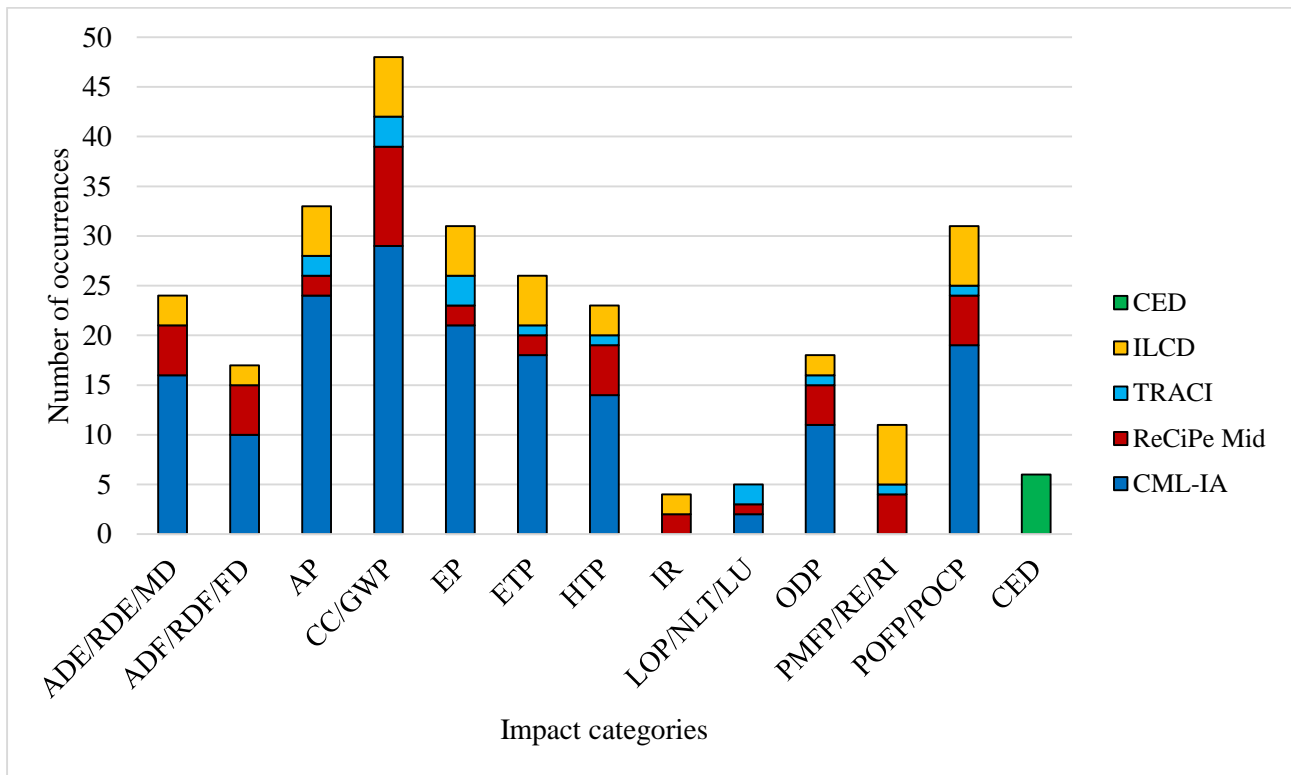


Figure 6: Number of occurrences of the impact categories used in the documents under study

As shown in Figure 6, identifying a suitable set of indicators that are more representative for this field is quite challenging, especially given the complexity of the system (product and processes) under analysis. The main LCIA methods used in this sector are not focused on a single-issue. In some cases, when single-issue LCIA methods were adopted (*e.g.*, CED), they were not the only LCIA method used in the analysis. Indeed, other indicators from other LCIA methods were also employed to gain a wider overview of the environmental burdens. CML-IA and ReCiPe were the most adopted midpoint LCIA methods, even though in some cases, for the sake of brevity, only a few indicators were presented in the analysis, and among them, the most used were CC/GWP, AP, EP, POFP/POCP, ETP, HTP, and ADE/RDE/MD. The CC/GWP indicator was the most commonly used since the use phase was recognized as the most impactful activity within the lifecycle of the vessel, and the combustion of fossil fuels during the operational phase has a strong correlation with the CO₂ emissions and CC/GWP indicator. Nevertheless, researchers always mentioned the need of evaluating various indicators, which are equally important and necessary to have a clear overview of the product system under investigation. The selection of a specific LCIA method is critical for standardizing LCA outcomes depending on vessel categories, bearing in mind that some specific environmental impacts can be assessed with different LCIA methods and final results may be comparable even when the calculation has been performed using a different methodology. This is the case, for instance, of CC/GWP indicators.

4.3. Background data e software tools

The data required to generate the life cycle inventories of the product systems under study have been retrieved from various sources and can be classified as specific (or primary) data and background (or secondary) data. The former are data gathered from the manufacturing facilities (*e.g.*, shipyards) where product-specific procedures are carried out, or from other life cycle activities that may be traced back to the unique system under examination (*e.g.*, peculiar operational profile, measured fuel consumption, maritime-specific operations, etc.). The latter are often generic data from widely available data sources (*e.g.*,

commercial or free databases). Among the available sources, ecoinvent is the most commonly used (24 documents), followed by GaBi (14), as shown in Figure 7. In several publications, more than one database has been adopted.

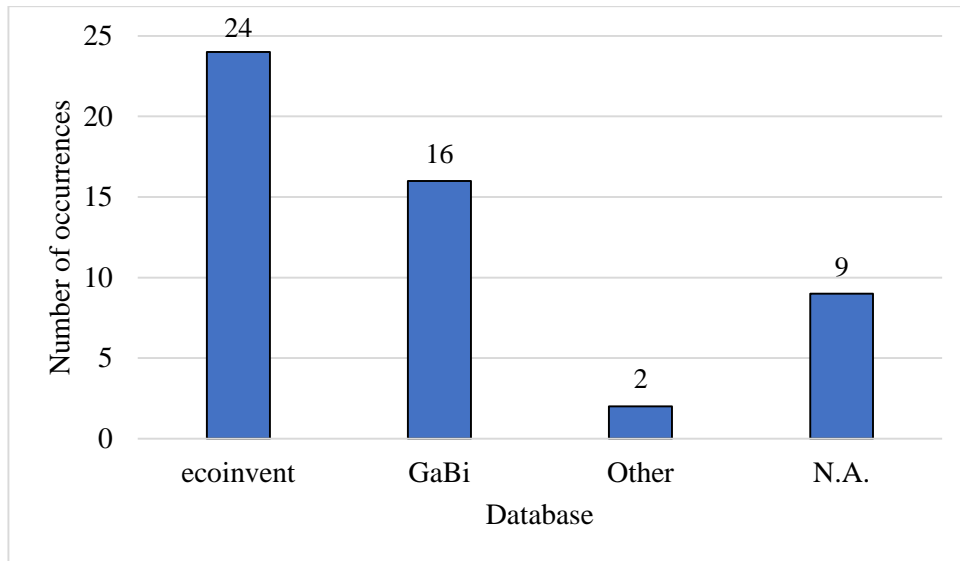


Figure 7: Background Data sources

According to the review analysis, commercial databases (such as ecoinvent and GaBi) offer a good way to speed up the collection of secondary data inventories in this complex field. LCI step is very time-consuming and the adoption of commercial databases for secondary data is extremely helpful for life cycle vessel analyses. On the other hand, primary data from shipbuilding are necessary to reduce the variability and the uncertainty related to the construction phase (*e.g.*, the kind and quantity of raw materials employed, manufacturing processes alternatives, etc.) and to enhance the comparability of analyses performed by different researchers. The fact that the shipbuilding phase of a vessel may involve a variety of shipbuilding activities and systems (such as hulls, superstructure, power systems, equipment, fittings, etc.), each of which may vary in size depending on the specific vessel, is another essential factor to emphasize when working with primary data. These inequalities prevent a fair comparison among various studies and vessels and it would be complex to identify good manufacturing practices, as long as a normalization of the result on a common ground is not pursued.

Typically, well-established databases are provided along with commercial tools, allowing for the quick implementation of life cycle inventory and the easy retrieval of characterisation factors for a wide range of impact categories. SimaPro is the most often utilized commercial tool (20 occurrences), followed by GaBi (16 contributions). Some specific tools have been developed, accounting for 6 occurrences, while the others have not disclosed the tool used. Figure 8 shows the software usage among the documents, where several publications employed more than one software.

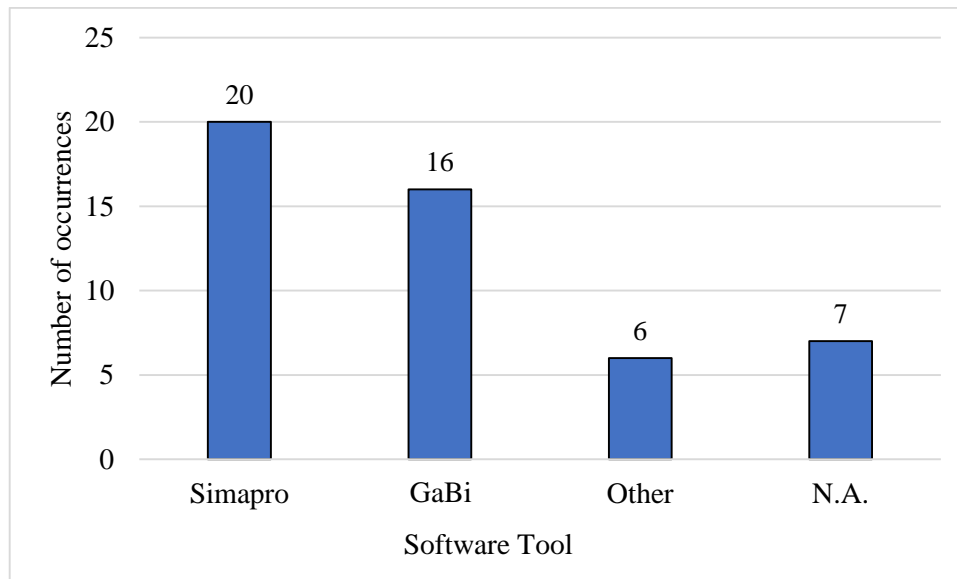


Figure 8: Software tools used for LCA calculations in the documents under investigation

Concerning the software tools used for the LCIA calculation, there are no significant differences related to the usage of a specific tool. This outcome is important in the spirit of the LCA normalization process and it suggests focusing on the type of data (both primary and secondary) and the data quality rather than the tool used for the analysis.

5. Conclusion

In this review, the authors have reported an analysis of the literature dealing with LCA studies applied to the naval sector. A number of keywords were selected and used in the Scopus literature search. The authors further refined the research findings based on the system boundary of the product system investigated by each paper, distinguishing between two major trends: (i) a system boundary that encompasses at least one vessel component, and (ii) a system boundary that only includes the fuel supply chain used in the naval sectors. Only full articles and conference proceedings from peer-reviewed journals were evaluated, resulting in 47 publications covering various categories of naval production, limited to product systems whose system boundaries include at least one component of the vessel. The main features of the bibliographic analysis outcomes have been analysed first, identifying the number of publications per year and per source, the authorships, and the country co-occurrence to better understand the trends and localization of LCA research in the maritime sector. The main trends in the published articles were then also presented, aiming to determine whether any LCIA methodology, background database, or software tool was more frequently used in the publications under investigation.

By following this approach, a set of guidelines were defined with the aim to create an LCA normalization framework in the naval field. The establishment of a suitable allocation model is the first recommendation, as a result of the literature review the adoption of the "Allocation Cut-off" model is suggested. Another relevant aspect to consider is the definition of the FU, which should be vessel lifetime-independent to allow for a fair comparison between vessels with different lifetimes. Moreover, in the definition of the FU, the vessel category plays an important role in defining the purpose of the operational activities. Thus, the FU shall be defined following the scope/purpose of the vessel (*e.g.*, 1 ton of bulk cargo over one km transported by sea for cargo vessels). This classification is a key feature for ensuring a fair comparison among alternative solutions within the same vessel category, allowing for the identification of the main sources of environmental burdens based on the intrinsic function of the analysed vessel. Furthermore, system boundaries need to be precisely defined, indicating which life cycle phases are taken into account and which ones are ignored. The outcomes of the literature review support the splitting of the life cycle impacts of

1 maritime vessels into specific contributions, such as “raw materials and shipbuilding”, “operation”,
2 “maintenance”, and “end-of-life”. It is essential to report both the life cycle inventory and the outcomes of
3 life cycle impact assessment for each life cycle phase included within the system boundary. For instance,
4 considering the materials and manufacturing phase, practitioners shall define the modules and components
5 included in the assessment (*e.g.*, hull, propulsion system, superstructure, etc.), preferably indicating the
6 specific mass of each material within every component. The literature review did not clearly identify the LCIA
7 method that is most appropriate for the naval field in terms of impact categories. In order to avoid the
8 burden-shifting effect, a set of indicators showing potential damages in different ecosystems rather than the
9 single-issue LCIA methods shall be used. This is the case of CML-IA or ReCiPe methods, which are the most
10 commonly used LCIA methods in the analysed publications. On the other hand, the use of secondary data
11 from commercial LCA database is necessary due to the large amount of data to collect and manage during
12 the LCI phase. Commercial databases, such as ecoinvent or GaBi, are frequently used in this context. Finally,
13 despite the occasional use of self-developed tools, the last recommendation involves the use of well-
14 established software tools, which is a standard practice when performing LCA analyses. Nonetheless, there
15 is no evidence that the calculation tool has any effect on the final LCA result.
16
17
18

19 These general guidelines allow for the establishment of a suitable normalization framework for the outcomes
20 of LCA analyses in the naval field, which is described in details in the second part of this review (Mio et al.,
21 2022). The normalization procedure enables LCA practitioners to generate consistent outcomes when
22 assessing the environmental impact of maritime vessels. More specifically, it enables fair comparisons of
23 ships among various vessel categories (“horizontal” normalization) and within particular groups of vessels
24 (“vertical” normalization), supporting the decision-making process towards more sustainable engineering
25 and design solutions.
26
27
28

29 6. References

- 30
31 Abdou, K., Gascuel, D., Aubin, J., Romdhane, M.S., Ben Rais Lasram, F., Le Loc’h, F., 2018. Environmental life
32 cycle assessment of seafood production: A case study of trawler catches in Tunisia. *Sci. Total Environ.*
33 610–611, 298–307. <https://doi.org/10.1016/j.scitotenv.2017.08.067>
34
35
36 Abdou, K., Le Loc’h, F., Gascuel, D., Romdhane, M.S., Aubin, J., Ben Rais Lasram, F., 2020. Combining
37 ecosystem indicators and life cycle assessment for environmental assessment of demersal trawling in
38 Tunisia. *Int. J. Life Cycle Assess.* 25, 105–119. <https://doi.org/10.1007/s11367-019-01651-5>
39
40
41 Bare, J., 2011. TRACI 2.0: The tool for the reduction and assessment of chemical and other environmental
42 impacts 2.0. *Clean Technol. Environ. Policy* 13, 687–696. <https://doi.org/10.1007/s10098-010-0338-9>
43
44 Bicer, Y., Dincer, I., 2018a. Environmental impact categories of hydrogen and ammonia driven transoceanic
45 maritime vehicles: A comparative evaluation. *Int. J. Hydrogen Energy* 43, 4583–4596.
46 <https://doi.org/10.1016/j.ijhydene.2017.07.110>
47
48 Bicer, Y., Dincer, I., 2018b. Clean fuel options with hydrogen for sea transportation: A life cycle approach.
49 *Int. J. Hydrogen Energy* 43, 1179–1193. <https://doi.org/10.1016/j.ijhydene.2017.10.157>
50
51 Blanco-Davis, E., Zhou, P., 2014. LCA as a tool to aid in the selection of retrofitting alternatives. *Ocean Eng.*
52 77, 33–41. <https://doi.org/10.1016/j.oceaneng.2013.12.010>
53
54 Burman, M., Kutteneuler, J., Stenius, I., Garme, K., Rosén, A., 2014. Comparative Life Cycle Assessment of
55 the hull of a high-speed craft. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 230, 378–387.
56 <https://doi.org/10.1177/1475090215580050>
57
58 Chatzinikolaou, S.D., Ventikos, N.P., 2015. Holistic framework for studying ship air emissions in a life cycle
59 perspective. *Ocean Eng.* 110, 113–122. <https://doi.org/10.1016/j.oceaneng.2015.05.042>
60
61 Cucinotta, F., Guglielmino, E., Sfravara, F., 2017. Life cycle assessment in yacht industry: A case study of
62
63
64
65

comparison between hand lay-up and vacuum infusion. *J. Clean. Prod.* 142, 3822–3833.
<https://doi.org/10.1016/j.jclepro.2016.10.080>

Cucinotta, F., Raffaele, M., Salmeri, F., Sfravara, F., 2021. A comparative Life Cycle Assessment of two sister cruise ferries with Diesel and Liquefied Natural Gas machinery systems. *Appl. Ocean Res.* 112, 102705.
<https://doi.org/10.1016/j.apor.2021.102705>

de Bruijn, H., van Duin, R., Huijbregts, M.A.J., Guinee, J.B., Gorree, M., Heijungs, R., Huppes, G., Kleijn, R., de Koning, A., van Oers, L., Wegener Sleeswijk, A., Suh, S., Udo de Haes, H.A. (Eds.), 2002. Handbook on Life Cycle Assessment. *Eco-Efficiency in Industry and Science* 7. <https://doi.org/10.1007/0-306-48055-7>

Dong, D.T., Cai, W., 2020. Life-cycle assessment of ships: The effects of fuel consumption reduction and light displacement tonnage. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 234, 143–153.
<https://doi.org/10.1177/1475090219858810>

Dong, D.T., Cai, W., 2019. A comparative study of life cycle assessment of a Panamax bulk carrier in consideration of lightship weight. *Ocean Eng.* 172, 583–598.
<https://doi.org/10.1016/j.oceaneng.2018.12.015>

EC-JRC, 2012. Characterisation factors of the ILCD Recommended Life Cycle Impact Assessment methods: database and supporting information, European Commission. <https://doi.org/10.2788/60825>

Favi, C., Campi, F., Germani, M., Manieri, S., 2018a. Using design information to create a data framework and tool for life cycle analysis of complex maritime vessels. *J. Clean. Prod.* 192, 887–905.
<https://doi.org/10.1016/j.jclepro.2018.04.263>

Favi, C., Campi, F., Mandolini, M., Germani, M., 2019. Using engineering documentation to create a data framework for life cycle inventory of welded structures, in: *Procedia CIRP*. Elsevier B.V., pp. 358–363.
<https://doi.org/10.1016/j.procir.2019.01.006>

Favi, C., Germani, M., Campi, F., Mandolini, M., Manieri, S., Marconi, M., Vita, A., 2018b. Life Cycle Model and Metrics in Shipbuilding: How to Use them in the Preliminary Design Phases, in: *Procedia CIRP*. Elsevier B.V., pp. 523–528. <https://doi.org/10.1016/j.procir.2017.11.071>

Favi, C., Raffaelli, R., Germani, M., Gregori, F., Manieri, S., Vita, A., 2017. A Life Cycle Model to assess costs and environmental impacts of different maritime vessel typologies. *Proc. ASME 2017 Int. Des. Eng. Tech. Conf. Comput. Inf. Eng. Conf.* 1–12.

Fet, A.M., Margrethe Aspen, D., Ellingsen, H., 2013. Systems engineering as a holistic approach to life cycledesigns. *Ocean Eng.* 62, 1–9. <https://doi.org/10.1016/j.oceaneng.2013.01.003>

Gilbert, P., Wilson, P., Walsh, C., Hodgson, P., 2017. The role of material efficiency to reduce CO2 emissions during ship manufacture: A life cycle approach. *Mar. Policy* 75, 227–237.
<https://doi.org/10.1016/j.marpol.2016.04.003>

Goedkoop, M., Spriensma, R., 2000. The Eco-indicator 99 A damage oriented method for Life Cycle Impact Assessment Methodology Report.

González-García, S., Villanueva-Rey, P., Belo, S., Vázquez-Rowe, I., Moreira, M.T., Feijoo, G., Arroja, L., 2015. Cross-vessel eco-efficiency analysis. A case study for purse seining fishing from North Portugal targeting European pilchard. *Int. J. Life Cycle Assess.* 20, 1019–1032. <https://doi.org/10.1007/s11367-015-0887-6>

Gratsos, G.A., Psaraftis, H.N., Zachariadis, P., 2010. Life-cycle co2 emissions of bulk carriers: A comparative study. *Trans. R. Inst. Nav. Archit. Part A Int. J. Marit. Eng.* 152.
<https://doi.org/10.3940/rins.ijme.2010.a3.176>

Huijbregts, M.A.J., Steinmann, Z.J.N., Elshout, P.M.F., Stam, G., Verones, F., Vieira, M., Zijp, M., Hollander,

- 1 A., van Zelm, R., 2017. ReCiPe2016: a harmonised life cycle impact assessment method at midpoint
2 and endpoint level. *Int. J. Life Cycle Assess.* 22, 138–147. <https://doi.org/10.1007/s11367-016-1246-y>
- 3 IMO - International Maritime Organization, 2019. IMO 2020 Consistent Implementation of MARPOL ANNEX
4 VI.
- 5
6 IMO - Marine Environment Protection Committee, 2020. MEPC 75/7/15 - Reduction of GHG emissions from
7 ships. Fourth IMO GHG Study 2020, International Maritime Organization.
- 8
9 Jeong, B., Wang, H., Oguz, E., Zhou, P., 2018. An effective framework for life cycle and cost assessment for
10 marine vessels aiming to select optimal propulsion systems. *J. Clean. Prod.* 187, 111–130.
11 <https://doi.org/10.1016/j.jclepro.2018.03.184>
- 12
13 Jolliet, O., Margni, M., Charles, R., Humbert, S., Payet, J., Rebitzer, G., Rosenbaum, R., 2003. IMPACT 2002+:
14 A New Life Cycle Impact Assessment Methodology. *Int. J. Life Cycle Assess.*
15 <https://doi.org/10.1007/BF02978505>
- 16
17 Kjær, L.L., Pagoropoulos, A., Hauschild, M., Birkved, M., Schmidt, J.H., McAloone, T.C., 2015. From LCC to
18 LCA using a hybrid Input Output model - A maritime case study, in: *Procedia CIRP*. Elsevier, pp. 474–
19 479. <https://doi.org/10.1016/j.procir.2015.02.004>
- 20
21
22 Ling-Chin, J., Roskilly, A.P., 2016a. Investigating a conventional and retrofit power plant on-board a Roll-
23 on/Roll-off cargo ship from a sustainability perspective - A life cycle assessment case study. *Energy*
24 *Convers. Manag.* 117, 305–318. <https://doi.org/10.1016/j.enconman.2016.03.032>
- 25
26 Ling-Chin, J., Roskilly, A.P., 2016b. Investigating the implications of a new-build hybrid power system for
27 Roll-on/Roll-off cargo ships from a sustainability perspective – A life cycle assessment case study.
28 *Appl. Energy* 181, 416–434. <https://doi.org/10.1016/j.apenergy.2016.08.065>
- 29
30 Ling-Chin, J., Roskilly, A.P., 2016c. A comparative life cycle assessment of marine power systems. *Energy*
31 *Convers. Manag.* 127, 477–493. <https://doi.org/10.1016/j.enconman.2016.09.012>
- 32
33 Mio, A., Bertagna, S., Cozzarini, L., Laurini, E., Bucci, V., Marinò, A., Fermeglia, M., 2021. Multiscale
34 modelling techniques in life cycle assessment: Application to nanostructured polymer systems in the
35 maritime industry. *Sustain. Mater. Technol.* 29. <https://doi.org/10.1016/j.susmat.2021.e00327>
- 36
37 Mio, A., Fermeglia, M., Favi, C., 2022, A critical review and normalization of the life cycle assessment
38 outcomes in the naval sector - Articles description. In press
- 39
40
41 Nam, S., Lee, D.K., Jeong, Y.K., Lee, P., Shin, J.G., 2016. Environmental impact assessment of composite
42 small craft manufacturing using the generic work breakdown structure. *Int. J. Precis. Eng. Manuf. -*
43 *Green Technol.* 3, 261–272. <https://doi.org/10.1007/s40684-016-0034-2>
- 44
45 Nian, V., Yuan, J., 2017. A method for analysis of maritime transportation systems in the life cycle approach
46 – The oil tanker example. *Appl. Energy* 206, 1579–1589.
47 <https://doi.org/10.1016/j.apenergy.2017.09.105>
- 48
49 Önal, M., Neşer, G., 2018. End-of-life alternatives of glass reinforced polyester boat hulls compared by LCA.
50 *Adv. Compos. Lett.* 27, 134–141. <https://doi.org/10.1177/096369351802700402>
- 51
52 Park, T., So, S., Jeong, B., Zhou, P., Lee, J. ung, 2020. Life cycle assessment for enhanced Re-liquefaction
53 systems applied to LNG carriers; effectiveness of partial Re-liquefaction system. *J. Clean. Prod.*
54 <https://doi.org/10.1016/j.jclepro.2020.124832>
- 55
56 Pennington, D.W., Potting, J., Finnveden, G., Lindeijer, E., Jolliet, O., Rydberg, T., Rebitzer, G., 2004. Life
57 cycle assessment Part 2: Current impact assessment practice. *Environ. Int.*
58 <https://doi.org/10.1016/j.envint.2003.12.009>
- 59
60 Pommier, R., Grimaud, G., Prinçaud, M., Perry, N., Sonnemann, G., 2016. Comparative environmental life
61
62
63
64
65

1 cycle assessment of materials in wooden boat ecodesign. *Int. J. Life Cycle Assess.* 21, 265–275.
2 <https://doi.org/10.1007/s11367-015-1009-1>

3 Prinçaud, M., Cornier, A., Froëlich, D., 2010. Developing a tool for environmental impact assessment and
4 eco-design for ships. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 224, 207–224.
5 <https://doi.org/10.1243/14750902JEME185>

6
7 Quang, P.K., Dong, D.T., Hai, P.T.T., 2021. Evaluating environmental impacts of an oil tanker using life cycle
8 assessment method. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 235, 705–717.
9 <https://doi.org/10.1177/1475090221989195>

10
11 Quang, P.K., Dong, D.T., Van, T.V., Hai, P.T.T., 2020. Greenhouse gas emissions of a cargo ship from a life
12 cycle perspective. *Int. J. Environ. Sci. Dev.* 11, 347–351.
13 <https://doi.org/10.18178/IJESD.2020.11.7.1274>

14
15 Ramos, S., Vázquez-Rowe, I., Artetxe, I., Moreira, M.T., Feijoo, G., Zufía, J., 2011. Environmental assessment
16 of the Atlantic mackerel (*Scomber scombrus*) season in the Basque Country. Increasing the timeline
17 delimitation in fishery LCA studies. *Int. J. Life Cycle Assess.* 16, 599–610.
18 <https://doi.org/10.1007/s11367-011-0304-8>

19
20
21 Rebitzer, G., Ekvall, T., Frischknecht, R., Hunkeler, D., Norris, G., Rydberg, T., Schmidt, W.P., Suh, S.,
22 Weidema, B.P., Pennington, D.W., 2004. Life cycle assessment Part 1: Framework, goal and scope
23 definition, inventory analysis, and applications. *Environ. Int.*
24 <https://doi.org/10.1016/j.envint.2003.11.005>

25
26
27 Stocker, T.F., Qin, D., Plattner, G.-K., Tignor, M., Allen, S.K., Boschung, J., Nauels, A., Xia, Y., Bex, V., Midgley,
28 P.M., 2013. IPCC, 2013: Climate Change 2013: The Physical Science Basis. Contribution of Working
29 Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change.

30
31 Tchertchian, N., Millet, D., Yvars, P.A., 2016. The influence of the level of definition of functional
32 specifications on the environmental performances of a complex system. *EcoCSP approach. Int. J.*
33 *Sustain. Eng.* 9, 277–290. <https://doi.org/10.1080/19397038.2015.1085110>

34
35 Tchertchian, N., Yvars, P.A., Millet, D., 2013. Benefits and limits of a Constraint Satisfaction Problem/Life
36 Cycle Assessment approach for the ecodesign of complex systems: A case applied to a hybrid
37 passenger ferry. *J. Clean. Prod.* 42, 1–18. <https://doi.org/10.1016/j.jclepro.2012.10.048>

38
39 The International Standards Organisation, 2021a. ISO 14040 Environmental management - Life cycle
40 assessment - Principles and framework.

41
42 The International Standards Organisation, 2021b. ISO 14044 Environmental management - Life cycle
43 assessment - Requirements and guidelines.

44
45 Tuan, D.D., Wei, C., 2019. Cradle-to-gate life cycle assessment of ships: A case study of Panamax bulk
46 carrier. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 233, 670–683.
47 <https://doi.org/10.1177/1475090218813731>

48
49
50 Van Zelm, R., Huijbregts, M.A.J., Van De Meent, D., 2009. USES-LCA 2.0-a global nested multi-media fate,
51 exposure, and effects model. *Int. J. Life Cycle Assess.* 14, 282–284. <https://doi.org/10.1007/s11367-009-0066-8>

52
53
54 Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018a. Optimisation of operational modes of short-route hybrid
55 ferry: A life cycle assessment case study. *Marit. Transp. Harvest. Sea Resour.* 2, 961–970.

56
57 Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018b. Life cycle cost and environmental impact analysis of ship hull
58 maintenance strategies for a short route hybrid ferry. *Ocean Eng.* 161, 20–28.
59 <https://doi.org/10.1016/j.oceaneng.2018.04.084>

60
61 Wang, H., Zhou, P., 2018. Systematic evaluation approach for carbon reduction method assessment – A life
62
63
64
65

1 cycle assessment case study on carbon solidification method. *Ocean Eng.* 165, 480–487.
2 <https://doi.org/10.1016/j.oceaneng.2018.07.050>

3 Wang, H., Zhou, P., Liang, Y., Jeong, B., Mesbahi, A., 2020. Optimization of tugboat propulsion system
4 configurations: A holistic life cycle assessment case study. *J. Clean. Prod.* 259, 120903.
5 <https://doi.org/10.1016/j.jclepro.2020.120903>
6

7 Ytreberg, E., Åström, S., Fridell, E., 2021. Valuating environmental impacts from ship emissions – The
8 marine perspective. *J. Environ. Manage.* 282. <https://doi.org/10.1016/j.jenvman.2021.111958>
9

10 Ziegler, F., Groen, E.A., Hornborg, S., Bokkers, E.A.M., Karlsen, K.M., de Boer, I.J.M., 2018. Assessing broad
11 life cycle impacts of daily onboard decision-making, annual strategic planning, and fisheries
12 management in a northeast Atlantic trawl fishery. *Int. J. Life Cycle Assess.* 23, 1357–1367.
13 <https://doi.org/10.1007/s11367-015-0898-3>
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Wordcount: 20944

A critical review and normalization of the life cycle assessment outcomes in the naval sector. Articles description

Andrea Mio^{a*}, Maurizio Fermeglia^a, Claudio Favi^b

a. MolBNL@UniTS, Department of Engineering and Architecture, University of Trieste, Italy

b. Department of Engineering and Architecture, University of Parma, Italy

* Corresponding author e-mail: amio@units.it

Abstract

Most of the actual industrial research efforts are aimed at reducing environmental burdens associated with human activities in the context of sustainable development. This trend has become increasingly prevalent in the naval transportation sector shown by a growing number of scientific publications dealing with life cycle assessments of maritime-related activities. However, the life cycle assessment framework provides practitioners with a variety of alternatives for conducting the analyses, giving room for defining key factors, such as functional units, system boundaries, and impact assessment methods, among others. This lack of standardization resulted in a wide range of assumptions and findings that are seldom comparable. The goal of this review is providing a systematic literature analysis, focusing on the characteristics of life cycle assessments dealing with the environmental impacts of various maritime vessel categories. In the first part, a qualitative analysis of the available scientific literature has been performed, providing a bibliometric analysis and a general overview of the characteristics of the studies (*i.e.*, life cycle impact assessment methodologies, background data, and software tools used). The outcomes of the bibliometric analysis are then summarized and discussed to understand current practices and future trends in this field, providing the basis for the normalization phase of the results. The second section of the paper offers advice for naval practitioners on how to perform results normalization to produce comparable analyses. Two approaches for normalization have been proposed in the frame of this study: an “horizontal” one, which is based on vessel features and allows a comparison among different vessel typologies, and a “vertical” one that enables to fairly compare vessels of the same category to one another. In addition, each section reports the outcomes of greenhouse gas-related impact categories, which have been subjected to the proposed normalization procedure, along with the order of magnitude of the results for each life cycle phase. The overall work provides an overview of LCA impact results as well as a collection of procedures and recommendations for future life cycle assessments based on specific vessel types, in terms of functional unit selection, system boundary definition, impact assessment approach, presentation of the outcomes, and normalization basis.

Keywords: LCA, Life Cycle Assessment, Life Cycle Analysis, Naval, Ship, Maritime

Glossary

ADE: Abiotic Depletion of Elements

AP: Acidification Potential

1 BAU: Business As Usual
2 CAD: Computer-Aided Design
3 CC: Climate Change
4 CCS: Carbon Capture and Storage
5 CED: Cumulative Energy Demand
6 CPC: Central Product Classification
7 DE: Diesel Electrical
8 DM: Diesel Mechanical
9 DWT: DeadWeight Tonnage
10 EcoCSP: Ecological Constraint Satisfaction Problem
11 EI99: EcoIndicator 99
12 EIO: Economic Input-Output
13 EEZ: Exclusive Economic Zone
14 EoL: End of Life
15 EP: Eutrophication Potential
16 EPD: Environmental Product Declaration
17 ETP: EcoToxicity Potential
18 FRC: Fouling Release Coating
19 GHG: GreenHouse Gas
20 GMAW: Gas Metal Arc Welding
21 GT: Gross Tonnage
22 GTAW: Gas Tungsten Arc Welding
23 GWP: Global Warming Potential
24 HCFC: HydroChloroFluoroCarbon
25 HFO: Heavy Fuel Oil
26 HTP: Human Toxicity Potential
27 ILCD: International reference Life Cycle Data system
28 IPCC: Intergovernmental Panel on Climate Change
29 IR: Ionising Radiation
30 ISO: International Organization for Standardization
31 LCA: Life Cycle Assessment
32 LCC: Life Cycle Costing
33 LCI: Life Cycle Inventory
34 LCIA: Life Cycle Impact Assessment
35 LES: Lifecycle Emission Share
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 LNG: Liquefied Natural Gas
2 LWT: Lightship WeighT
3 MD: Metal Depletion
4 MDO: Marine Diesel Oil
5 METP: Marine EcoToxicity Potential
6 MEU: Marine EUtrophication
7 MSETP: Marine Sediment EcoToxicity Potential
8 N.A.: Not Applicable – Not Available
9 ODP: Ozone Depletion Potential
10 PM: Particulate Matter
11 POCP: Photochemical Ozone Creation Potential
12 POFP: Photochemical Oxidant Formation Potential
13 RoPax: Roll-on/roll-off Passenger
14 RoRo: Roll-on/roll-off
15 SMAW: Shielded Metal Arc Welding
16 TETP: Terrestrial EcoToxicity Potential
17 TEU: Terrestrial EUtrophication
18 TRACI: Tool for Reduction and Assessment of Chemicals and other environmental Impacts
19 ULCC: Ultra Large Crude Carrier
20 VLCC: Very Large Crude Carrier
21 VOC: Volatile Organic Compound
22 WTW: Well-To-Wake

41 1. Introduction

43 This review examines the scientific literature dealing with specific vessel categories, in order to serve as a
44 reference for practitioners investigating the environmental performance of peculiar vessels. The analysed
45 publications have been gathered by vessel categories, allowing the reader to focus on past research dealing
46 with specific vessel groups, with the goal of providing some benchmark values against which future
47 investigations may be compared. As reported by Mio et al. (2022), numerous environmental categories have
48 been employed among the investigated documents, posing a critical issue for a full collection of the outcomes
49 in a single review. In order to improve readability, this review solely reports the results of GreenHouse Gas
50 (GHG)-related impact categories, although the proposed normalization approach may be applied to any
51 impact category. The vessels have been categorized using the Central Product Classification (CPC) codes
52 (Department of Economic and Social Affairs, 2015), which represent specific industrial products within a
53 larger product categorization system that encompasses all commodities and services.

54 The following sections discuss the common characteristics of life cycle assessment (LCA) works developed for
55 distinct vessel categories, with the goal of addressing the primary issue with life cycle assessments in the
56 naval field, namely, the inconsistent presentation of the outcomes. Additionally, a ranking system to identify

the vessel categories with the lowest environmental impact was suggested. To the best of authors' knowledge, a systematic review of the applications of LCA in the wide range of maritime vessels and ships has not been published yet.

2. Methods

The most ambitious aim of this review is to provide a guideline for future publications related to LCA of ships and maritime systems towards a standard presentation of results, enhancing the repeatability and robustness of the studies. Based on the outcomes of the first part of this review (Mio et al., 2022) and following the recommendations prescribed by ISO 14044 (The International Standards Organisation, 2021), information such as functional unit, system boundary, allocation approach and Life Cycle Impact Assessment (LCIA) methods, among others, needs to be clearly stated. These results are reported and summarized in the first part of the literature review (Mio et al., 2022) and provide the framework for the normalization process. Furthermore, the outcomes should be presented in such a way that the contribution from each stage of the life cycle is explicitly outlined and standardized, to allow for comparison with other studies. In this context, practitioners in the naval sector should perform the normalization step described by the ISO standards (The International Standards Organisation, 2021), using the following approach and reference flows:

- A cradle-to-gate analysis of the vessel itself, until the vessel delivery. System boundary should comprehend extraction, refinement, and transportation of materials and shipbuilding activities. This information provides a deeper insight into the construction materials and shipbuilding practices, whose impacts are usually hidden by the burdensome operation activities. Vessels may involve comparable shipbuilding activities but may require a different amount of materials for construction, *i.e.*, they may display a different lightship weight (LWT). These inequalities prevent a fair comparison among various studies and vessels and it would be complex to highlight the good manufacturing practice, as long as a normalization of the result on a common ground is not pursued. Furthermore, the reference service life may be different between vessels, restraining again the comparability between studies.

In this scenario, practitioners should present the outcomes of this life cycle phase normalized on the lightship weight (LWT) of the vessel on a year-basis, as presented in Eq.(1):

$$\text{Shipbuilding} = \frac{\text{Impacts of shipbuilding operations and construction materials}}{\text{LWT [ton]} * \text{lifetime [yr]}} \quad (1)$$

Benefits and drawbacks of this approach can be summarized as follows:

- it allows comparing vessels of various categories and sizes. Since this approach exhibits the impacts of shipbuilding activities and construction materials, its application is not restricted to a comparison among vessels of the same category, but can be extended to any generic vessel, allowing a comparison between a massive wooden vessel and a lighter aluminium motor yacht;
- a mass-based functional unit exhibits the intrinsic impacts of construction materials, promoting the employment of novel greener material alternatives;
- it enables the comparison of literature data with any future study under identical system boundaries for any vessels' lightship weight;
- a fair comparison between vessels with different service lifetime can be performed;
- the main disadvantage is the lack of clarity of the impacts of the vessel construction to the reader. It is common practice to show the impacts related to the overall shipbuilding phase using the entire vessel as normalization basis, which is rather simple to understand. It is desirable to report both the results normalized on the vessel itself and on the lightship weight and lifetime;

- shipyards are usually able to supply specific documents such as lightship weight document, engines datasheets and Computer-Aided Design (CAD) models, where information for compiling life cycle inventory can be retrieved (Favi et al., 2018a);
 - when only the majority of the vessel's mass, at least the hull and superstructures, is included within the system boundary, the LWT and lifetime normalization may still be valid. However, when the system boundary excludes the heaviest structures of the vessel, this normalization basis appears inadequate and the weight of the product system under investigation should be used. For instance, the weight of the engines (in [ton]) should be utilized as the normalization basis when the power system is the only part of the vessel included within the system boundary.
- Two methods can be used to normalize the operational phase's impact indicators separately from those of the other life cycle phases: (i) a “vertical” normalization carried out by following the vessel function and allowing a comparison of vessels belonging to the same category, and (ii) a “horizontal” normalization carried out by following the vessel features, allowing a comparison of different vessels regardless of their functions. Knowing that the operational phase is the most burdensome life cycle phase of a vessel, many authors focused their studies on identifying the best alternatives in terms of fuel choice, engine technology, fuels supply chain, and so on. Thus, the assessment of life cycle impacts using the normalization basis adopted for the operational phase, can be generally used as the most representative of the life cycle's overall impacts, at least for climate change-related issues. Concerning the vertical normalization, the different purposes of marine vessels (transportation of a person, shipping of cargo, fishing, provision of services to other vessels, leisure, etc.) require a specific definition of the function of the product system, determining the normalization of the results on different bases. The recommended vertical normalization bases for the operational activities of each vessel category are reported in Table 1. The descriptions of the rationale behind each normalization basis can be found in the sections dedicated to peculiar vessel categories.

Table 1: CPC codes of the vessel types analysed in this review along with the proposed operational phase normalization

Vessel type	CPC code	Operational phase*	Equation
Cruise and ferry boats	49311	$Operation = \frac{Impacts\ of\ operational\ phase}{passengers[\#] * distance[km] * trips[\#]}$	(2)
Tankers	49312	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(3)
LNG carriers	49313	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(4)
Cargo vessel	49314	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(5)
Fishing vessels	49315	$Operation = \frac{Impacts\ of\ operational\ phase}{landing[ton] * distance[km] * trips[\#]}$	(6)
Tug boats	49316	$Operation = \frac{Impacts\ of\ operational\ phase}{cargo[ton] * distance[km] * trips[\#]}$	(7)
Pleasure and sporting boats	494	$Operation = \frac{Impacts\ of\ operational\ phase}{passengers[\#] * time[hr]}$	(8)

*[#] stands for dimensionless quantities

The development of a given normalization basis for each vessel type brings the following consequences:

- each normalized indicator depicts the environmental performance of the product system for each unique vessel function, making it easy to comprehend;
- within the specific vessel category, comparability on the vessel peculiar function is guaranteed;
- the usage of the normalized indicator is suitable for LCA studies where only the operational phase is considered within the system boundary, *e.g.*, life cycle analysis of a product transported by cargo vessel;
- a comparison between the operational activities of vessels belonging to the same category is allowed.

Concerning the horizontal normalization, the different features/parameters of a vessel (size, weight, dimensions, power, etc.) can be used to overcome the rigid ship-type scheme. The recommended horizontal normalization basis for the operational activities based on vessel features/parameters is reported in Eq.(9).

$$Efficiency\ Ratio = \frac{\frac{Impacts\ of\ shipbuilding\ activities\ and\ construction\ materials}{Impacts\ of\ operational\ phase}}{\frac{Engine\ Power\ [kW]}{LWT\ [ton]}} \quad (9)$$

The engine power [kW] to lightship weight (LWT in [ton]) ratio is used as an indicator of vessel design efficiency, and it can be used to normalize the ratio of emissions throughout shipbuilding and navigation, regardless of ship category. The Efficiency Ratio enables a comparison between the operational activities of vessels belonging to any vessel category.

- An indicator focused on maintenance routine should be added when these activities are within the system boundary. Maintenance procedure usually includes activities such as equipment substitution or repainting, which are usually proportional to the vessel's dimension. Therefore, the presentation of the impact scores based on the lightship weight (LWT) and service lifetime is suggested, as reported in Eq.(10):

$$Maintenance = \frac{Impacts\ of\ maintenance\ activities\ and\ materials}{LWT\ [ton] * lifetime[yr]} \quad (10)$$

The introduction of this normalization basis guarantees several benefits:

- it allows the comparison of similar maintenance activities, even if they have been performed on different size vessel, *e.g.*, the usage of diverse paints and coatings from distinct LCAs;
- a mass-based functional unit exhibits the intrinsic impacts of maintenance materials and operations, promoting the employment of less burdensome alternatives;
- it enables the comparison of literature data with any future study under identical system boundaries for any vessels' lightship weight;
- a fair comparison between maintenance activities of vessels with different service lifetime can be performed;
- since this method shows the effects of maintenance operations and materials, it may be applied to any vessel, not only those in the same category;
- the main disadvantage is the lack of clarity of the impacts of the vessel maintenance to the reader. It is common practice to show the impacts of the maintenance activities over the entire lifetime, which is rather simple to understand. It is desirable to report both the results normalized on the vessel itself and on the lightship weight and lifetime;
- An analogous normalization procedure should be used for the end-of-life impact scores. Compiling life cycle inventories for the end-of-life scenarios is challenging, since the disposal of vessels is usually

1 uncertain. When this life cycle phase is within the system boundary of the vessel under study (cradle-
2 to-grave approach), the end-of-life treatment impacts should be normalized on a lightship weight
3 and lifetime bases, as shown in Eq.(11):
4

$$5 \quad EoL = \frac{\text{Impacts of disposal treatments}}{LWT [\text{ton}] * \text{lifetime}[\text{yr}]} \quad (11)$$

6
7
8 The advantages and drawbacks of this approach are equivalent to the ones reported for the
9 maintenance normalization basis.
10

11 3. Normalized LCA outcomes from the literature review

12 This section aims at presenting the LCA outcomes of the studies dealing with maritime vessels available in
13 the scientific literature by applying the normalization procedures previously defined. The normalized results
14 can serve as benchmarks for each vessel group (vertical normalization, presented in section 3.1.), as well as
15 for the comparison of vessels regardless of the function/purpose (horizontal normalization, presented in
16 section 3.2). Finally, section 3.3 refers to the LCA results of studies carried out to investigate vessel-related
17 activities.
18
19
20
21

22 3.1. Vertical normalization based on vessel function

23 The results presented hereafter provide a comparison of LCA analysis based on the function provided by the
24 specific vessel category. The vertical normalization, performed at vessel type, leads to two crucial outcomes:
25 (i) identify the emerging trend and sustainable design solutions developed for specific vessel group, and (ii)
26 provide some benchmark values for practitioners in this field.
27
28
29

30 3.1.1. Cruise and Ferry Boats

31 Cruise ships and ferry boats have been grouped together due to their common purpose of transporting
32 passengers from one location to another. The cruise ships are designed to carry passengers traveling
33 roundtrip for pleasure and stopping at different ports, while ferry boats are used for the transport of both
34 persons and vehicles from point A to point B. They are both classified under CPC code 49311: "*Cruise ships,*
35 *excursion boats and similar vessels, principally designed for the transport of persons; ferry boats of all kinds*".
36
37
38

39 Since the main purpose of this critical review is providing a standardization basis on a reference unit to
40 normalize the environmental impacts of the operational phase for different vessel types, the normalization
41 basis needs to involve the inclusion of three factors: the number of passengers transported each trip (which
42 is unitless and represented using symbol [#]), the weighted average trip distance expressed in kilometres
43 [km] and the number of trips [#] performed during the timespan under investigation, as shown in Eq.(2) of
44 Table 1. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary
45 Materials.
46
47

48 The eight peer-reviewed publications available for this vessel category were examined, following a temporal
49 sequence. The publications dealing with Well-To-Wake (WTW) analysis, *i.e.*, including exclusively the life cycle
50 of the fuel within the system boundary, based on the operational profiles of ferry boats were excluded.
51 Tchertchian et al. (2013) employed optimization techniques such as Pareto, Design of Experiment and
52 Constraint Satisfaction Problems in combination with LCA. Their aim was to identify the environmentally
53 optimized configuration during the conceptual design phase of an aluminium ferry boat in terms of both
54 structural and propulsion systems. In this paper, the minimization of the CML-IA and EI99 impact categories
55 was the designed target of the optimization algorithms used to define the product system with the lowest
56 overall environmental burdens. Unfortunately, the presented results provide qualitative information only,
57 preventing the comparison with other literature values. As a general trend, the operational phase exhibits
58 the worst environmental footprint. The authors further extend their work on a following publication
59
60
61
62
63
64
65

(Tchertchian et al., 2016) where they deepened the definition of the functions provided by product systems, discerning between the essential functions and the negotiable services. Each alternative design simultaneously affects various vessel functions, leading to an unavoidable trade-off among optimum performances within each non-essential function constraints, which was bounded between minimum and maximum limits. The proposed Ecological Constraint Satisfaction Problem (EcoCSP) allows defining both suitable combinations of available technologies and the functional mix that significantly reduces the environmental impacts related to vessel construction and operation. Indeed, LCA is not only employed as a comparison tool, but also as an eco-design technique, using “2400 passengers transported a day” as a functional unit. Furthermore, the scores of environmental impact categories belonging to CML-IA method and EI99 are presented for the entire life cycle, excluding the end-of-life. Average values among the alternative designs have been taken as benchmarks and normalization has been applied on total transported passengers during the boat daily routine (2300-2400) and distance travelled by each person (13.89 km), using the information provided on both papers of the research group (Tchertchian et al., 2016, 2013). The features of the analysed vessels are reported in Table 2, while the CML-GWP impact category score is reported in Figure 1 and Table S.1 of the Supplementary Materials.

Blanco-Davis et al. (2014) assessed the retrofit potential environmental impacts of a ferry using the LCA methodology, as shown in Table 2. Their scope was to highlight the benefits of the switch from conventional antifouling coating to a Fouling Release Coating (FRC) system based on a silicone elastomer technology. The functional unit inferred from the interpretation of the paper is “the vessel construction, maintenance, operation and disposal over the lifetime of 25 years”. Two case studies have been developed, distinguished by a regular maintenance of the conventional antifouling coating or a switch to the FRC system after half of vessel lifespan, which leads to a lower fuel consumption for the remaining operational activities. Due to the comparative purpose of this study, shipbuilding materials and activities encompass only the essential elements of the vessel, *i.e.*, hull, accommodation and main machinery. Fuel consumption is modelled considering an average speed of 25 knots, as the vessel's operational profile follows a regular sailing schedule on long trips. The assessment makes use of the GWP impact category within CML-IA method, splitting the overall environmental burden into the contributions from shipbuilding, maintenance, operation and disposal. The environmental impacts for shipbuilding, maintenance and end-of-life phases have been normalized using Eq.(1) for a comparison with other works in the same field, as reported in Figure 1 and Table S.1 of Supplementary Material. However, since the passenger capacity is not defined, the results of the operational phase are unsuitable for normalization over the total number of passengers transported and the distance travelled by each one. From an environmental and economic standpoint, antifouling coating replacement outperforms the standard antifouling technology.

A comparative life cycle study among several boat construction materials has been carried out by Pommier et al. (2016), whose assessment analysed the usage of aluminium, composite material, local (French) or African wood for the hull of a small passenger ferry travelling within Archachon Bay, as reported in Table 2. Data have been retrieved within ecoinvent database and completed with information obtained from a local boatyard, Environmental Product Declarations (EPDs) and a private database, using a cradle-to-grave approach. Even though the authors chose the function of the ferry as functional unit (“transportation of 60 passengers and 20 bikes for 30 years”), they removed the contribution of the fuel consumption from the presented results, aiming at better highlighting the impacts of each construction material life cycle. A more suitable simplified functional unit would have been “the construction, maintenance and disposal of the hull of a ferry boat transferring 60 passengers and 20 bikes for 30 years”. This is a typical case when the usage of the impacts normalization on the lightship weight and expected lifetime is beneficial in order to standardize the results and perform a fair comparison. In fact, a normalization of the outcomes based on the varied lifespan and lightship weight of the boats would have changed the results, boosting the performances of aluminium hulls over composite hulls for all impact categories and even reducing the impacts for wood hulls. These results are mainly driven by the different lifetime of the vessels, which should be accounted for an

1 equal comparison, as a longer vessel lifespan distributes the shipbuilding impacts over a longer timespan). In
2 the original paper the maintenance activities have been accounted for 30 years only, therefore this
3 comparison still needs to be improved, although the impacts generated by maintenance activities are usually
4 negligible in comparison with shipbuilding ones. The authors incorporated the lifetimes into the solutions;
5 nevertheless, it is unclear how the various lifetimes affected the outcomes. The normalized results confirmed
6 and reinforced the authors' conclusions, suggesting a higher employment of wood for boat hull construction
7 from an environmental viewpoint, particularly for impacts related to Climate Change (CC). The original and
8 normalized scores for CC impact category are reported in Table S.1 of Supplementary Materials and
9 graphically in Figure 1.
10

11 Wang et al. (2018a) used GaBi database in combination with four impact categories, *i.e.*, GWP, Acidification
12 Potential (AP), Eutrophication Potential (EP), and Photochemical Ozone Creation Potential (POCP), to assess
13 the environmental and economic impacts of installing and operating a short-route hybrid ferry power system,
14 applying a life cycle approach to optimize the operational activities. Furthermore, the authors developed
15 three built-in models for fuels (Marine Diesel Oil - MDO and Heavy Fuel Oil - HFO), transportation (fuel
16 consumption and emission released due to specific transportation distance by 3.3-ton payload lorry) and
17 scrapping (energy required by scrapping processes of different materials). Several operational profiles,
18 maintenance without materials, scrapping phase, and the production and installation of the main engines
19 and batteries all fell inside the system boundary, ensuring a cradle-to-grave approach. Different propulsion
20 systems were studied, covering a wide variety of potential configurations. The same research group
21 published a more extensive analysis on the same product system in another paper (Jeong et al., 2018). In this
22 work, the authors developed a modular framework for identifying the best ship design among various choices
23 regarding cost and environmental impacts in the long-run. Each module dealt with a specific ship structure
24 on a single life cycle stage. The composition of various models gave rise to several product systems, which
25 have been compared to identify the optimal solution using a dedicated tool (LabVIEW). In this paper, the
26 presentation of the authors' methodology was followed by two case studies, one of which focused on the
27 cradle-to-grave LCA of different engines construction, installation and operation on a Ro-Pax ferry, as
28 reported in Table 2. The propulsion alternatives comprehended diesel mechanical (DM), diesel electrical (DE)
29 and hybrid installations, which have been investigated through sensitivity analyses using various LCIA
30 methods (CML-IA and 2010, TRACI and ReCiPe) and electricity sources for battery charging. The system
31 boundaries were restricted to the engines only, therefore the results are not suitable for a comparison with
32 other LCA studies on ferry vessels. In general, the hybrid system was the most environmentally friendly on
33 the impact categories calculated (GWP, AP, EP, POCP) and the operational phase revealed as the most
34 burdensome life cycle phase. Moreover, sensitivity analyses displayed lower emissions and costs when the
35 battery usage was maximum, showing a fruitful relationship between the adoption of the hybrid solution and
36 the reduction in cost and emissions. The results of the paper along with normalized values are reported in
37 Table S.1 of Supplementary Material and graphically in Figure 1. Since the system boundary includes the
38 power system only, the normalization is based on the weight of the engines, *i.e.*, 3.2 ton for a diesel electrical
39 and 4 ton for a diesel mechanical, and the weight of the batteries (3.5 ton). The last paper of this research
40 group (Wang et al., 2018b) extended the application of the LCA to investigate the economic and
41 environmental assessment of the ship hull maintenance, providing a useful tool to determine an optimal
42 maintenance strategy for ship operators. According to the authors, a poorly maintained hull surface could
43 increase hull resistance and hence fuel consumption. Based on the ship's lifespan, their LCA model included
44 four stages: shipbuilding (hull construction and machinery installation), operation (service activity and fuel
45 consumption), five ship hull-specific maintenance plans, and scrapping through steel recycling and disposal.
46 The results showed that, although the operators adopted a five-year re-coating interval, the re-coating time
47 should be reduced to once a year, resulting in decreased fuel use and emissions. Among the available impact
48 categories, the carbon footprint (assessed using different LCIA methods such as CML-IA, ReCiPe, TRACI and
49 ILCD), was chosen to represent the environmental burdens. Although the functional unit was not clearly
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

defined, a short-distance ferry that frequently travels across Scotland was chosen as the subject of the case study. Thus, it is possible to consider as a functional unit, “the construction, operation, maintenance, and scrapping of a short route ferry with a lifespan of 30 years”. For the estimation of the steel weight required for the ship hull construction and the wet surface area for the quantity of anti-fouling coating, primary data were calculated using ad-hoc equations, using Gabi as secondary data source. The LCA analysis was coupled with life cycle cost assessment to support the decision-making process of the ship owner. Since the scores calculated using the different LCIA methods are mostly equivalent and the results for each life cycle phase are not appreciable due to their different order of magnitude, the outcomes of the assessment have been reported in terms of inventory data (CO₂ emissions) in Table S.1 of the Supplementary Material and graphically in Figure 1.

In their study, Cucinotta et al. (2021) performed a comparative LCA of two propulsion systems on a cruise ferry, *i.e.*, a standard Diesel machinery system and Liquefied Natural Gas (LNG) one, as shown in Table 2. The two configurations have been analysed using the impact categories belonging to ILCD 2018 method in a cradle-to-grave perspective, including shipbuilding materials and activities (in terms of hull, outfitting and machinery), operational phase for 25 years on a regular route and dismantling of the vessels. During end-of-life activities, all the recyclable materials are partially or entirely reused or refurbished, while non-recyclable materials are landfilled. The maintenance phase has not been considered as it is generally less burdensome in comparison to the other phases and it does not vary between vessel configurations. The ecoinvent European market data has been used to describe the fuels supply chain. Both ecoinvent data uncertainty and final result sensitivity have been performed. The former exploited the ecoinvent data quality system, while the latter dealt with variations in fuel consumptions and steel loss during the shipbuilding activities. Since the variation of propulsion has not significant influence on the overall vessel configuration, the functional unit chosen is “one ship during its lifetime”. As a general result, the LNG propulsion achieved better performance among the majority of impact categories. In particular, LNG-fuelled ship exhibits better results on resource depletion and, generally, on human health, which is strongly influenced by HFO extraction, refining and combustion. However, climate change score is strongly influenced by the processes of natural gas liquefaction, transport and evaporation (due to compression, refrigeration, emission of Volatile Organic Compounds - VOC and methane leakage) as well as by the phenomenon of methane slip, which increase the CO₂-equivalent effect. Moreover, the authors identified a critical activity releasing massive methane emission, *i.e.*, the five-year dry-docking operations when the LNG fuel tanks must be completely emptied, gas freed and filled with air. The most burdensome life cycle phase is the operational one, while the contribution from shipbuilding is more relevant for the LNG ship than for the diesel one, particularly for human health issues. The LNG Otto cycle engines revealed as a valid alternative in terms of emission reduction, as long as methane leakage and liquefaction energy consumption are below a certain limit. As a consequence, LNG-fuelled ship shifts the impact generation on the methane supply chain, delocalizing the emission that used to be mostly produced during fuel combustion. Moreover, a relevant reduction of the emission of SO_x, NO_x and Particulate Matter (PM) can be achieved, allowing the navigation within the Emission Control Areas set up by the International Maritime Organization. The original and normalized results of the assessment are shown in Table S.1 of Supplementary Material and graphically in Figure 1 for GHG-related impact categories.

Table 2: Cruise and Ferry Boats’ features of the available LCA studies.

Type	Passenger ferry	Passenger ferry	RoPax Ship	Ferry boat	MV Hallaig RoPax Ferry	Cruise ferry
Source	(Tchertchian et al., 2013)	(Tchertchian et al., 2016)	(Blanco-Davis et al., 2014)	(Pommier et al., 2016)	(Jeong et al., 2018; Wang et al., 2018a, 2018b)	(Cucinotta et al., 2021)

1	Production site	N.A.	N.A.	N.A.	France	UK	Denmark
2	Production year	N.A.	N.A.	2001	2012	2012	2012
3	Operation location	France	France	Atlantic Ocean	France	UK	Norway
4	Estimated lifetime [year]	20	20	25	30-100	30	25
5	Service speed [knots]	12	12	25	N.A.	9	20.5
6	Mass Displacement [ton]	N.A.	25.5-27.8	20,150	20.5-23.4	235	15,199-15,309
7	Deadweight (DWT) [ton]	N.A.	9.4-11.5	6,515	1.6-4.5	135	3,551
8	Lightship weight (LWT) [ton]	20-40	16.1-16.7	13,635	16-21.7	100	11,648-11,758
9	Main engine power [kW]**	2x(150-350)DM* 2x(20-150)DE*	2x(70-80)DM* 2x(22-24)DE*	4x12,000 DM*	N.A.	2x450 DM* 3x360 DE*	4x5,600 DM* 4x5,250 LNG*
10	Auxiliary engine power [kW]	40-250	10	N.A.	N.A.	N.A.	N.A.
11	Fuel type	Diesel/Elec	Diesel/Elec	HFO	Diesel/Elec	MDO/Elec	HFO or LNG
12	Passenger capacity	96	100	N.A.	60	150	1,500
13	Single trips	24/day	23-24/day	150/yr	N.A.	6,260/yr	175/yr
14	Average distance travelled by passenger [km]	13.89	13.89	1,037.12	N.A.	5.1	1,426

*DM= Diesel Mechanical, DE=Diesel Electrical, LNG= Liquefied Natural Gas

**If more than one engine was present, the number of engines was specified, along with the specific engines power

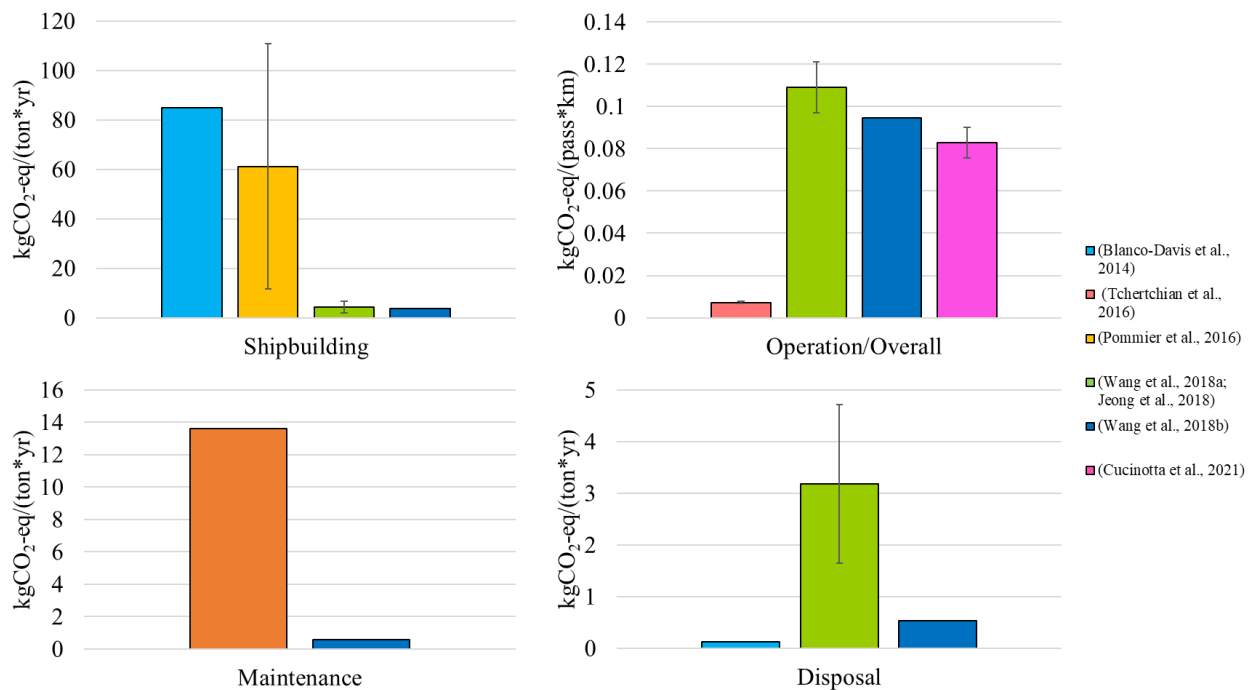


Figure 1: GHG-related normalized scores for Cruise and Ferry Boats. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports between life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. In general, shipbuilding activities related to vessels' structures manufacturing generate GHG emission in the order of 10^1 - 10^2 kgCO₂-eq normalized on LWT and lifetime, while operational activities emit 10^{-2} - 10^{-1} kgCO₂-eq for each passenger transported for 1 km. The former is mostly influenced

1 by the materials used in hull construction, whilst the latter is highly variable owing to the length of trips and
2 the vessel's passenger capacity.

3 3.1.2. Tankers

4 Tanker vessels are mainly used in the oil industry to carry either crude oil from oil fields to refineries or
5 petroleum products such as gasoline, diesel fuel, fuel oil, or petrochemical feedstock from refineries to
6 distribution centres. Major types of tankships include the oil tanker, the chemical tanker, and gas carrier,
7 which are gathered under 49312 CPC code. Tankers vary in size from small coastal vessels about 60 metres
8 (200 feet) long, carrying from 1,500 to 2,000 DWT, up to huge vessels that reach lengths of more than 400
9 metres (1,300 feet), carrying as much as 550,000 DWT. In addition to tankers that navigate on the ocean or
10 the sea, there are also specialized inland-waterway tankers that travel on rivers and canals and have an
11 average cargo capacity of up to a few thousand tons.
12
13
14

15 In order to obtain a standard reference unit to normalize the environmental impacts of the operational phase
16 for different vessel types, three parameters are recommended for this purpose: the cargo capacity [ton], the
17 covered distance of single trips expressed in kilometres [km] and the number of full trips (unitless [#])
18 performed during the timespan under investigation, as shown in Eq.(3) of Table 1. It is worth noticing that
19 cargo capacity is commonly expressed using the deadweight tonnage (DWT), even though the payload
20 capacity is a more accurate parameter than DWT. However, payload capacity is not always available and it
21 does not differ too much from the DWT, which is then recommended. The procedure to be followed to obtain
22 a correct normalization is detailed in the Supplementary Materials.
23
24
25

26 The main focus of the available scientific literature dealing with LCA studies on tankers refers to the air
27 emission (*i.e.*, GHG) of the extraction, processing and combustion of traditional or alternative marine fuels.
28 The operating phase of tanker vessels, which is covered in six published publications about tanker vessels
29 themselves (Bicer and Dincer, 2018b, 2018a; Chatzinikolaou and Ventikos, 2015; Kjær et al., 2015; Nian and
30 Yuan, 2017; Quang et al., 2021), shows the greatest impact because it involves burning engine fuel to move
31 cargo from one location to another. As a frequent result, using alternative fuels to MDO and HFO (such as
32 LNG) appears to be helpful in lowering GHG emissions, leading to a more sustainable approach in this field.
33 So far, no comparison of different tankships has been published, nor has a benchmark for this CPC category
34 been established for further research and decision-making strategies.
35
36
37

38 The study published by Kjær et al. (2015) adopted the environmental input-output model to investigate how
39 LCA and life cycle costing (LCC) can be integrated by using the same financial-inventory data for medium
40 range tankers operating worldwide. Tanker's features are provided in Table 3. System boundaries were
41 defined with a cradle-to-grave perspective, including shipbuilding activities, ship operations, maintenance,
42 and ship scrapping. The functional unit was defined as "*one average year of ship transport service*" and the
43 reference flow was set as "*the total amount of t-km per average year*", expressing the results per t-km. The
44 overall impacts across the whole life cycle can be obtained considering the tanker lifetime of 20 years. The
45 Economic Input-Output (EIO) database from the FORWAST project (Villeneuve, 2007) was combined with
46 primary data from various sources (such as shipyards, literature, and shipping routes) as background
47 information. The results were given in terms of CO₂-eq for the environmental standpoint and USD for the life
48 cycle costing. As shown in Figure 2 and Table S.2 of the Supplementary Material, the results were calculated
49 using the total number of t-km yearly (2.87 billion t-km) and the annual GHG emissions (32 million tonCO₂-
50 eq). The normalization procedure described in this study is not-applicable to the assessment outcomes since
51 no further information about the trips or the distance travelled in a single trip is supplied.
52
53
54
55
56

57 The work proposed by Chatzinikolaou and Ventikos (2015) aims to model the air emissions of an ocean-going
58 ship in a life cycle perspective, creating an adequate and reliable life cycle emissions inventory. A case study
59 referring to a Panamax tanker is reported and the tanker's features are provided in Table 3. System
60 boundaries were defined with a cradle-to-grave perspective, including shipbuilding activities (limited to hull
61
62
63
64
65

and machinery production), ship operation, maintenance, and ship dismantling. In this case, although the analysis was performed under the LCA framework, the functional unit was not defined since the examination of life cycle impacts of vessel emissions is not included within the scope of this paper. However, the functional unit can be assumed as “*the construction, maintenance, operation and disposal of a tanker for a period of 25 years*”. Primary data from different sources (*i.e.*, shipyard, literature, shipping routes) were managed by using ad-hoc equations. Primary data were integrated with background data using EX-TREMIS DB for the estimation of emission factors of CO, PM, and CH₄ for operational phase. The results in terms of air emissions of CO₂ are displayed graphically in Figure 2 and numerically in Table S.2 of Supplementary Material.

The same Panamax tanker with the an analogous operational profile was analysed by Quang et al. (2021). Vessel features described in this work are provided in Table 3. System boundaries were defined with a cradle-to-grave perspective: from raw material extraction stage to the ship’s end-of-life (including shipbuilding, ship operation, maintenance, ship’s disposal, and material transportation activities). The functional unit was defined as “*one oil tanker with a deadweight of 74,296 ton for the transportation of crude oil by sea over its 25-year lifetime*” and the reference flow is the Panamax oil tanker itself. Primary data from different sources (*i.e.*, shipyard, literature) were integrated with background data from GaBi. Results are displayed following the CML-IA LCIA method, comprehending numerous impact categories. The results of the two works (Chatzinikolaou and Ventikos, 2015; Quang et al., 2021) performed on the same vessel are reported in Figure 2 and in Table S.2 of Supplementary Material. Due to the use of different units of measure (kgCO₂ vs. kgCO₂-eq), there is a substantial difference between the works, which reflects the use of CML-IA LCIA method in the evaluation of CML-GWP, comprehending other GHG emissions (*i.e.*, CH₄, HCFC, etc.). Moreover, the work of Quang et al. (2021) adopted a different allocation approach, accounting for environmental benefits from material recycling at the End of Life (EoL) phase, in contrast with the work of Chatzinikolaou and Ventikos (2015).

Referring to the work of Nian and Yuan (2017), the authors' objective was to use an LCA approach to evaluate systems offering services in maritime transportation (*i.e.*, crude oil transport by mean of tankers). The paper investigated eleven oil routes that encompassed five different tanker types: (i) Panamax, (ii) Aframax, (iii) Suezmax, (iv) very large crude carrier – VLCC, and (v) ultra large crude carrier – ULCC (Table 3). System boundaries were defined with a cradle-to-grave perspective, including shipbuilding activities (in terms of energy consumption for one tonne of LWT), ship operation, maintenance, and ship scrapping (materials recycling). Even though the authors suggested creating a new benchmark for maritime energy efficiency improvement and decarbonization based on the physical unit of kgCO₂/t-km, the functional unit was not explicitly established within the research. Primary data from different sources (*i.e.*, Chinese shipyard, shipping routes, etc.) were managed by using ad-hoc equations and results are reported in terms of direct CO₂ emissions. The normalization process of the functional unit was performed by considering the overall cargo transported in a round trip by the tanker (considering the DWT) and the overall distance (km) travelled in a year, which has been calculated using the single trip distance times the number of annual trips. The approach is consistent, in its basis, with the one proposed in this review. However, no information is provided regarding trips and the distance covered in empty/full mode (see Figure 2 and Table S.2 of Supplementary Material).

As indicated in Table 3, two articles by Bicer and Dincer (2018a, 2018b) studied the environmental implications of alternative carbon-free fuels (hydrogen and ammonia) vs traditional HFO for the operating activities of a freight vessel and a tanker. The system boundary included the vessel production, operation and maintenance, the lifecycle of the fuels, and the construction, activities and dismantling of two ports. The vessel engines under consideration were dual-fuel engines with hydrogen or ammonia replacing some HFO, either totally or partially (50/50). Green hydrogen produced by water electrolysis and ammonia obtained through the Haber-Bosch process have been employed by both studies. The two works differ in terms of the energy source used to produce the fuels, which is either biomass, geothermal and municipal waste energy

(Bicer and Dincer, 2018a) or wind and hydropower (Bicer and Dincer, 2018b). Both studies used “the transportation of 1 tonne of cargo for 1 km” as a functional unit to analyse the environmental consequences of shipping activities, allowing for simple comparison with other assessments. Based on trip scenarios, the GREET software was used to calculate power ratings and energy consumption, and the ecoinvent was used to collect life cycle inventory. Although the authors identified the processes that mostly affected each impact category, they did not go into detail regarding the life cycle inventory or how each life cycle stage contributed to the final results. This lack of information makes it very difficult to recreate the product system, should be avoided for the sake of clarity. Among the two authors’ publications, twenty-one potential scenarios were studied based on different combinations of fuels and supply chains Due to their greater energy consumption rate per ton-km, transoceanic freight ships exhibited higher impact values than tankers. Hydrogen derived from hydropower, geothermal, and municipal solid waste sources performed best as a standalone fuel, with the lowest environmental impacts for Marine Sediment EcoToxicity Potential (MSETP), Marine EcoToxicity Potential (METP), GWP, AP, Abiotic Depletion of Elements (ADE) and Ozone Depletion Potential (ODP). The use of ammonia as a dual fuel with HFO improves the outcomes by roughly 25-50% in every impact category, whereas the use of hydrogen in conjunction with HFO reduces impacts by about 35-60%. Despite the apparent advantages, some issues with the safe management and storage of hydrogen and ammonia (to a less extent) in sea transport remain. The results have already been normalized by the authors based on the total distance travelled by the ship during its service lifetime (3,920,000 km) and the deadweight of the freight ship of 100,000 ton. However, since tankers are commonly used to carry cargo on outward routes only, it is recommended using a normalization process based on the distance covered by the vessel while executing its cargo-carrying duty, which is half of the total distance given. The original outcomes for GHG-related impacts are reported in Table S.2 of Supplementary Material, along with the normalized ones, which are also showed graphically in Figure 2.

Table 3: Tankers’ features of the available LCA studies

Type	Medium range tanker	Panamax tanker	Five categories of tankers (Panamax, Aframax, Suezmax, VLCC, and ULCC)	Tanker
Source	(Kjær et al., 2015)	(Chatzinikolaou and Ventikos, 2015; Quang et al., 2021)	(Nian and Yuan, 2017)	(Bicer and Dincer, 2018a, 2018b)
Production site	China	South Korea	China	N.A.
Production year	2008	2009	2015	N.A.
Operation location	worldwide	worldwide	worldwide	worldwide
Estimated lifetime [year]	20	25	30	25
Service speed [knots]	14	14	8-15	18
Mass Displacement [ton]	61,000	88,300	N.A.	N.A.
Deadweight (DWT) [ton]	50,000	74,300	85,000 - 560,000	100,000
Lightship weight (LWT)[ton]	11,000	14,000	N.A.	N.A.
Main engine power [kW]*	N.A.	2x12,240	12,200 - 42,200	15,000
Auxiliary engine power [kW]*	N.A.	4x740	2,800 - 5,800	2,850
Fuel type	MGO, HFO, LSHFO	HFO	IFO	HFO, H2, NH3
Single Trips	N.A.	19-22/year	N.A.	1/lifetime
Average distance travelled by cargo [km]	N.A.	2,800 (estimated)	2,380-20,302	3,920,00

*If more than one engine was present, the number of engines was specified, along with the specific engines power

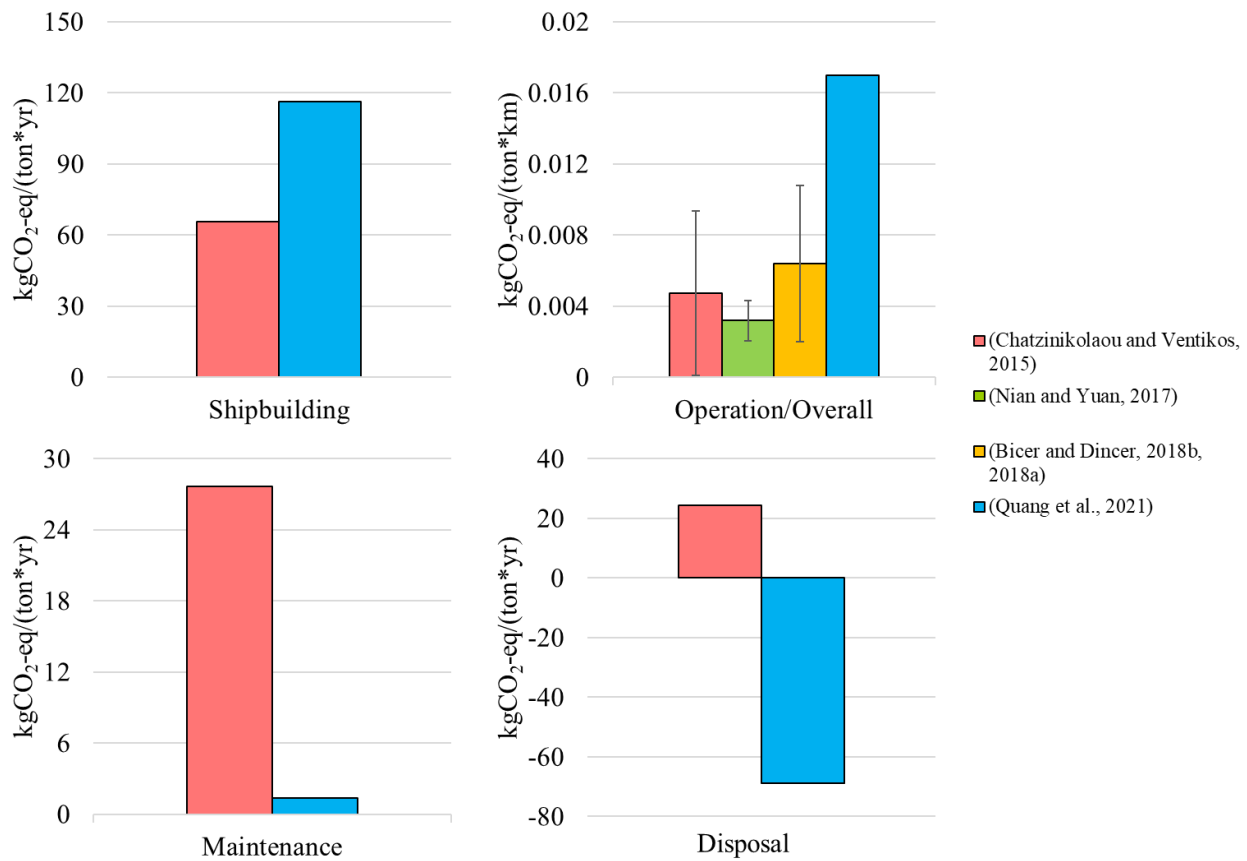


Figure 2: GHG-related normalized scores for Tankers. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports of life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. As general outcome for tankers, the shipbuilding activities related to the main structures (*i.e.*, hulls and machinery) generate GHG emission in the order of 10^1 - 10^2 kgCO₂-eq, normalized on LWT and lifetime. For this kind of vessel, the main material used for hull construction is carbon steel and the variability of results based on LWT is limited. On the other hand, operational activities are responsible of approx. 10^{-2} - 10^{-3} kgCO₂-eq for each ton of fuel transported for 1 km. The operational phase is mainly affected by the distance covered during a trip and the possibility to carry fuels during the return trip, too. The end-of-life phase shows high variability (in a range 10^{-1} - 10^2 kgCO₂-eq normalized on LWT and lifetime) due to different allocation approaches.

The outcomes of LCA studies dealing with tankers exhibit how the use phase is responsible of the highest impact along the overall life cycle. In particular, the operational phase accounts for 79% (Kjær et al., 2015), 96% (Chatzinikolaou and Ventikos, 2015), 91% (Nian and Yuan, 2017) and 99% (Quang et al., 2021) of the overall GHG emissions. In terms of impact generation, the operational phase is followed by the ship production, the port and transit service, other operational activities (loading/unloading) and the maintenance activities. Results are in accordance with the other studies previously discussed, supporting the general outcome in the transportation sector which highlights how the highest impact is generated during the operational phase. However, it is worth noticing that these findings need to be taken with caution, due to inconsistencies among the works regarding allocation approach, system boundary and functional units.

3.1.3. Cargo vessels

A cargo ship, often known as a freighter, is a merchant ship that transports commodities, minerals, and cargo from one port to another. Cargo vessels are normally custom-built for their purpose, including cranes and other loading and unloading gear, and exist in a variety of sizes and cargo capacity which are often identified by peculiar names (Suezmax, Q-max, Chinamax, Panamax, Seawaymax, etc.). They are generally built of welded steel nowadays, and they typically last 25 to 30 years before being dismantled, with a few exceptions. They can be classified into various categories based on the sort of cargo they transport. This section deals with the cargo ships classified under the 49314 CPC code “*Other vessels for the transport of goods and other vessels for the transport of both persons and goods*”: (i) general freight ships transporting packaged goods such as consumer products and vehicles, (ii) container ships carrying their cargo within truck-size intermodal containers, (iii) dry bulk carriers shipping grain, ore, coal and other pellet-size products in loose form, (iv) Roll-on/roll-off (RoRo) ships transporting wheeled cargo that is driven on and off the ship on its own wheels, such as cars, trucks, semi-trailer vehicles, trailers, and train cars.

Three parameters are required by the normalization approach: (i) the cargo transported by the vessel expressed in tonnage [ton], the weighted average shipping distance of the cargo expressed in kilometres [km] and the number of full trips performed during the considered time span ([#], unitless), as shown in Eq.(5) of Table 1. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary Materials.

Plenty of scientific publications focus their assessment on the operational phase only, including exclusively the fuel supply chain within the system boundary (WTW analyses). These contributions have not been taken into account, resulting in twelve publications analysed in this section.

The first contribution by Gratsos et al. (2010) assessed the carbon footprint of the manufacturing, operation and disassembly of two distinct cargo ship hulls (Panamax and Handymax), each with different corrosion margins and distinctive LWT. A previous work by the same research group (Gratsos and Zachariadis, 2005) indicated that ships built with corrosion allowances suitable for the ship’s design lifetime exhibit a reduced total cost, even though they would carry a little less cargo. A comparison based on lifetime CO₂ emission required a reasonable functional unit definition in order to guarantee the same transport service by ships with different expected lifetime (20 and 30 years). Since the various product systems have unequal payloads, different operating days per year and same speed, the authors decided to equalize the annual cargo*distance (ton-km) adjusting the number of available ships in the fleet for a total period of 60 years, which is the least common multiple between the ships lifetimes, in order to define a functional unit. First to introduce the actual capacity utilization of the ship, the authors estimated that the ships transport cargo about 65% of sea time (due to possible route optimization), while 35% of sea time the ships are on ballast. Their findings showed that lighter ships have superior life cycle environmental performance when CO₂ emissions generated from fuel burnt over the ship's lifetime operation are taken into account. However, additional CO₂ emissions are generated due to activities related to steel production (excluding raw materials extraction), shipbuilding activities, maintenance practice, recycling technologies and transport of raw materials. Therefore, in terms of total carbon footprint, more robust ships revealed more environmentally friendly due to larger corrosion margins, which result in fewer steel replacements and idle days. Following the normalization procedure pursued by this review, the DWT (instead of the payload) and a utilization factor of 50% (instead of 65%) have been employed to keep the normalization method consistent, which means that return trips are done on ballast and have the same length as direct journeys.

Ling-Chin and Roskilly published a series of articles dealing with the estimation of the environmental impacts of a hybrid system on-board of a RoRo cargo ship, *i.e.*, a diesel generator (acting as prime movers) assisted by photovoltaic modules, lithium-ion battery systems and a cold-ironing facility. In their first publication (Ling-Chin and Roskilly, 2016a), the authors investigated whether the refitting of the power system on-board of a RoRo cargo ship would be advantageous in terms of resource consumption and environmental burdens.

1 Therefore, they investigated the possibility of replacing a conventional diesel generator with a hybrid system
2 after 10 years of operation of the same RoRo cargo ship travelling on regular routes over a lifespan of 30
3 years. System boundaries comprehended energy and materials supply, manufacturing of the hybrid system,
4 operational and maintenance activities and recycling processes, which are presented in detail for metallic
5 scraps. The functional unit was defined as *“the operation of the hybrid power system implemented on-board
6 a RoRo cargo ship travelling on regular routes within ECAs over a lifespan of 30 years”*. The characterization
7 of the environmental burdens through impact categories (CML-IA, ILCD, EI99) showed that most of the
8 environmental footprint is generated during operation and end of life phases, in which ecotoxicity potential
9 reveals as the most significant impact. Sensitivity analyses have been employed to double-check the
10 environmental benefits of the retrofit plant, showing a significant reduction in the consumption of marine
11 diesel oil (MDO) and in the scores of CML-GWP, CML-Human Toxicity Potential (HTP), CML-AP, CML-
12 Eutrophication Potential (EP), CML-EcoToxicity Potential (ETP), as a result of increasing the rate of recycling
13 or landfilling at the end of life. The same authors published another extensive work (Ling-Chin and Roskilly,
14 2016b), providing a detailed inventory of the hybrid system raw materials and manufacturing processes,
15 using technical reports, expert judgement and textbook as sources of information. Even though the power
16 system configurations are different in comparison with the previous work, the system boundaries have not
17 been modified, as well as the functional unit. The authors provided an accurate life cycle inventory, enabling
18 other practitioners to straightforwardly replicate their results using several impact assessment methods
19 (CML-IA, ILCD, EI99). The authors then compared the performance of the hybrid system with a “business as
20 usual” diesel mechanical power system aiming at justifying the environmental benefits of the novel
21 technology. It was found that throughout the lifespan, the hybrid system shows a higher environmental
22 footprint in terms of ecotoxicity potential and abiotic depletion of fossil fuels. This is mainly due to the larger
23 amount of metal constituting the hybrid system, whose manufacturing and disposal processes were
24 responsible for the drop of the environmental performances. However, taking all impact categories into
25 account, the hybrid system provided an overall improvement of the environmental performance in
26 comparison with the conventional marine power system. In fact, the reduction by 1 or less order of
27 magnitude for twenty impact categories is perceived by the authors to prevail on the same magnitude
28 increase for the other six impact categories. The conventional plant, the retrofit plant and a new-build all-
29 electric system have been compared in a following paper by the same authors (Ling-Chin and Roskilly, 2016c).
30 They built up a bottom-up integrated approach to model each power system as a composition of peculiar
31 components, whose life cycle inventory has been studied in detail. Their findings confirmed that
32 environmental footprint on various natural compartments is generally reduced by the installation of the new-
33 build all-electric system when compared to the retrofit system, which in turn exhibits improved performances
34 than conventional systems. Basically, the installation of advanced marine power systems demands more
35 resources for manufacturing and disposal, although consuming less fuel and releasing less emissions during
36 navigation. Since the operational phase is the most burdensome activity throughout the life cycle of the
37 power system, this results in a general reduction in most impact categories at the expense of a few. The
38 information related to the vessels analysed in the works just presented are reported in Table 4, while the
39 outcomes are displayed graphically in Figure 3 and numerically in Table S.4 of Supplementary Material.
40
41
42
43
44
45
46
47
48
49

50 The first complete life cycle analysis of a container vessel hull has been published by Gilbert et al. (2017),
51 whose aim was to explore the CO₂ implications of introducing reusing/recycling practice in the shipbuilding
52 sector. The authors defined the functional unit as *“two hulls used for a duration of 26 years each”*. Three
53 scenarios have been developed, each one characterized by a different amount of primary steel used for the
54 second hull, *i.e.*, (i) 100% primary metal (Business As Usual - BAU), (ii) 100% secondary metal from previous
55 hull, (iii) 50% secondary steel from previous hull and 50% primary metal. System boundaries included
56 exclusively shipbuilding activities related to steel hull manufacturing, such as raw material supply, hull
57 manufacture, ship assembly, maintenance and end-of-life treatment processes. The impact assessment
58 exhibits a CO₂ emission reduction of approximately 29% for a complete reuse of the first hull (scenario (ii))
59
60
61
62
63
64
65

1 and a decrease of CO₂ emission of roughly 10% for a 50% reuse of first hull (scenario (iii)), both in comparison
2 with BAU. This is not surprising, as scenarios (ii) and (iii) cut down the usage of burdensome primary metal,
3 yielding substantial savings in terms of CO₂ emissions. Although the potential CO₂ emissions related to
4 maintenance and transportation may increase to enable higher levels of reuse and/or remanufacture, they
5 are likely to be negligible if compared to the primary metal supply required by the BAU scenario. The work's
6 primary shortcomings include the lack of a comprehensive overview provided by well-recognized
7 environmental impact methodologies and the absence of data regarding the ship's operational activities,
8 which precludes comparison with other thorough life cycle assessments available in the literature. Table 4
9 and Figure 3 show how the calculated CO₂ emissions were normalized using a LWT of 55000 tons and a
10 lifetime of 52 years to make the results useful for future research.
11
12

13 A following series of publications by Bicer and Dincer (2018a, 2018b) investigated the environmental impacts
14 of alternative carbon-free fuels (hydrogen and ammonia) in comparison with conventional HFO for the
15 operational activities of a freight vessel and a tanker, as shown in Table 4. These works have already been
16 described in section 3.2, where the outcomes related to the LCA of a tanker have been presented. In the
17 freight-related case study, the results have been normalized by the authors based on the total distance
18 travelled by the ship during its service lifetime (2,000,000 km) and the DWT of the freight ship of 40,000 ton.
19 However, since a freight ship usually transports cargo on direct journeys only, a normalization procedure
20 based on the distance travelled by the vessel when performing its function of carrying cargo (which is half of
21 the total distance reported) is recommended. The normalized results for GHG-related impacts are reported
22 graphically in Figure 3 and numerically in Table S.4 of Supplementary Material, along with original scores.
23
24
25

26 The life cycle assessment of ship engines coupled with a Carbon Capture and Storage (CCS) system to reduce
27 the greenhouse gas emissions from the exhausted gas of a bulk carrier has been carried out by Wang and
28 Zhou (2018). Their goal was to estimate the carbon footprint and the economic implications of introducing a
29 carbon capture and solidification process on-board a bulk carrier, whose characteristics are reported in Table
30 4. The functional unit is not clearly defined, even though it can be assumed that *"the manufacturing,
31 30-year operation and disposal of a ship engine coupled with a CCS system on a bulk carrier"* has been used.
32 Limited information is provided for the operational phase (distance travelled, cargo transported, CCS mass
33 and energy balances are missing), scrapping phase (no materials recovery or treatments) or electricity mix.
34 In fact, looking at the flowchart of the product system, electricity for manufacturing and dismantling seems
35 to be totally generated from wind energy, even though the authors did not justify this assumption in the text.
36 Nonetheless, the authors developed various scenarios under different carbon reduction targets and
37 determined a higher profit for lower carbon emission due to saving from carbon credits and trading of the
38 final product, *i.e.*, CaCO₃. A further limitation of the work resides on its narrow perspective focused on global
39 warming potential only. Indeed, the inclusion of other impact categories would have depicted a shifting of
40 the environmental burdens from one environmental issue to another, which is a well-known drawback of
41 CCS (Barbera et al., 2022). The GWP results presented in Figure 3 should be used bearing in mind that raw
42 materials extraction and refinement have not been included within the system boundary. Since the paper
43 deals with power system only, the normalization has been performed on the weight of the engine (36 ton),
44 while information regarding the distance travelled was missing.
45
46
47
48
49
50

51 Tuan and Wei (2019) performed a detailed cradle-to-gate assessment of the production of a Panamax bulk
52 carrier (see Table 4), choosing the functional unit accordingly, *i.e.*, *"the construction of one Panamax bulk
53 carrier for the transportation of coal from Australia to Japan over a 25-year life cycle"*. System boundary
54 included material extraction and production, ship hull and machinery construction, sea trials and
55 transportations between the activities. The inventory of each activity is well-described, showing formulas,
56 calculation principles, parameters values and inventory obtained. Secondary data have been retrieved within
57 the GaBi database, while CML-IA environmental impact method has been used. The results highlighted a
58 dominant contribution of raw material extraction and refinement phase, as it generates most of the burdens
59
60
61
62
63
64
65

among all the impact categories (87-100%). Shipbuilding emerged as the second most burdensome activity (2.26-10.50%), followed by sea trials, machinery production and transportation. Sensitivity analyses have been performed aiming at evaluating the effect of assumptions and calculation principles on the impact category scores. The final results, as expected, are heavily influenced by the hull weight, which comprises the majority of the ship's steel. Based on these findings, the authors extended their work on another publication (Dong and Cai, 2019), which deals with the eco-design of a Panamax bulk carrier comparing different lightship weights. This work extends the previous publication of Gratsos et al. (2010) introducing the raw materials extraction processes taken from GaBi as well as the holistic approach provided by the CML-IA LCIA method. The outcomes of Gratsos et al.'s assessment indicate that, for a given mass displacement, a lighter vessel maximizes its payload by cutting down the lightship weight. On the other hand, a heavier ship resulting from an increase of the hull thickness guarantees lower steel maintenance replacement and larger corrosion margins. The authors' study compares the environmental performances of these two ship design concepts by using an attributional LCA method, aiming at providing assistance to naval architects during the ship design stage. The functional unit adopted was "*the transport of one ton of bulk cargo over a distance of one km by sea during T years of service (20 or 30 years)*", which enables a comparison with other works in the field. System boundaries included the entire life cycle of the ships, pursuing a cradle-to-grave perspective. Materials and energy balances are well-described for each activity throughout the whole life cycle of the ship, as well as limitations and assumptions, which are further investigated using sensitivity analyses. Their results indicate that the lighter solution would emit more than double VOC, whereas slightly reducing NOx and SOx emissions in comparison with heavier ships. Concerning CML-IA environmental indicators, in general they are marginally increased by heavier ships (0.6-2.15%). However, this design yields a decisive improvement in terms of ADE (38.69%), Terrestrial EcoToxicity Potential-TETP (3.60–7.09%), ODP (21.29–21.58%), and METP (18.29–19.74%), justifying the authors' claim of better environmental performance for more massive ships. Their findings relied on a drop of maintenance material replacements, energy consumption, and emissions from the life cycle of the heavier ship, excluding the operational phase. This paper might be used as a benchmark for future studies on cargo vessels, thanks to the adoption of a suitable functional unit, the quality of the information provided and the assumptions transparency, which have been investigated through sensitivity analyses. In this review, the score normalization step employed the peculiar payloads of the vessels (70,700-71,500 ton) instead of the DWT, due to the essential role of this parameter to distinguish the different vessel features in this work. This research group further examined the environmental performance of a Panamax bulk carrier from an energy efficiency viewpoint (Dong and Cai, 2020). Energy efficiency technologies, such as air-lubrication systems or installation of solar panels, may decisively decrease life cycle emissions of ships, since the operational phase is commonly the most burdensome life cycle phase. However, the installation of additional systems raises the lightship weight, increasing the emissions from production and maintenance phases, while reducing the vessel payload. Numerous scenarios have been developed by the authors, using CML-IA method to evaluate both fuels savings (0-20%) and LWT increment (0-20%) simultaneously, avoiding the introduction of any specific energy optimization technology. The functional unit is "*the transport of one ton of bulk cargo over one km by sea over a 20-year service life*", whereas the system boundaries include raw material extraction and production, shipbuilding activities, operation and maintenance. The assessment's main conclusions are dual: a significant reduction of environmental impacts (except ADE) is gained by fuel savings, while several scenarios are more burdensome than the base case due to the increase in the lightship weight. A cradle-to-grave study published by the same research group concluded the series of group's publications presenting a Korean bulk carrier LCA (Quang et al., 2020) from different perspectives. The vessel under study was the same as in Gratsos et al.'s work (Gratsos et al., 2010), where more detailed information about assumptions and data source can be retrieved. The focus of this study is on GHG emissions only, limiting the analysis on GWP impact category of CML-IA. Since the work lacks information for reproducibility of the results (e.g., supply chains of materials, electricity mix, detailed inventory), the GWP result is not free of criticism. In accordance with other works, the operational phase is revealed as the most burdensome activity.

Table 4: Cargo vessels' features of the available LCA studies

Type	Panamax bulk carrier	Handymax bulk carrier	Panamax bulk carrier	RoRo Cargo ship		Container vessel	Freight ship	Bulk carrier	Panamax bulk carrier
Source	(Gratsos et al., 2010)		(Dong and Cai, 2020, 2019; Quang et al., 2020)	(Ling-Chin and Roskilly, 2016a, 2016c)	(Ling-Chin and Roskilly, 2016b, 2016c)	(Gilbert et al., 2017)	(Bicer and Dincer, 2018a, 2018b)	(Wang and Zhou, 2018)	(Tuan and Wei, 2019)
Production site	N.A.		Singapore	Denmark		N.A.	N.A.	N.A.	Japan
Production year	N.A.		2004	2004		N.A.	N.A.	N.A.	2004
Operation location	World		World	Europe		N.A.	World	World	World
Estimated lifetime [year]	20-30		20-30	10-30	30	2x26	25	30	25
Service speed [knots]	13.3		13.3	15-17		N.A.	18	N.A.	15.5
Mass Displacement [ton]	84,400	54,600	84,400	22,398		N.A.	N.A.	N.A.	88,248
Deadweight (DWT) [ton]	72,200-73,000	45,900 - 46,513	72,200-73,000	12,350		N.A.	51,500	157,500	76,300
Lightship weight (LWT) [ton]	11,400 - 12,200	8,087 - 8,700	11,400 - 12,200	10,048		55,000	N.A.	N.A.	11,948
Main engine power [kW]*	N.A.		8,830	4x5,760	2x5,000 1x4,000 1x3,000 1x2,000 1x1,000	N.A.	37,500	18,660	8,830
Auxiliary engine power [kW]*	N.A.		N.A.	2x1,563	N.A.	N.A.	8,300	N.A.	3x420
Fuel type	HFO		LSHFO	MDO, HFO	MDO	N.A.	HFO, H ₂ , NH ₃	HFO	HFO
Single Trips	1/yr	1/yr	1/yr	300/yr	300/yr	N.A.	1/lifetime	N.A.	N.A.
Average shipping distance [km]	145,248 - 148,558	146,075 - 148,972	145,248 - 148,558	209	209	N.A.	2,000,000	N.A.	N.A.

*If more than one engine was present, the number of engines was specified, along with the specific engines power

36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

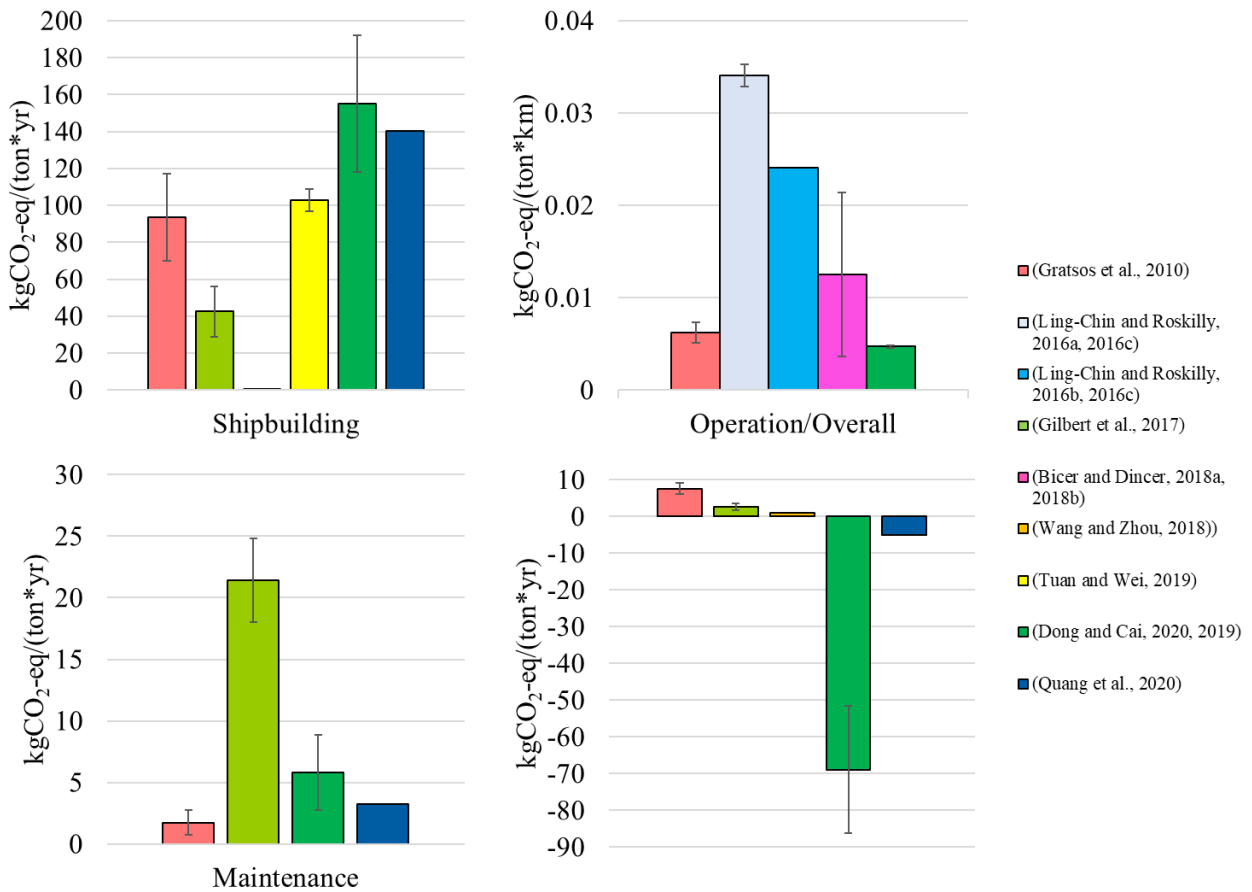


Figure 3: GHG-related normalized scores for Cargo Vessels. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports of life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. Shipbuilding activities that involve the construction of vessel structures produce GHG emissions in the range of 10^1 - 10^2 kgCO₂-eq, based on LWT and lifespan. For each ton of cargo moved for 1 km, operational activities produce 10^{-3} - 10^{-2} kgCO₂-eq, which is aligned with ecoinvent documentation. The former is mostly driven by the material (steel) used in freight vessel construction, whereas the latter is primarily influenced by the large amount of transportable cargo and the ships' high utilization.

3.1.4. Fishing vessels

A fishing vessel is a boat or ship employed for catching fish and other seafood generally from wild fisheries for commercial profit. On an estimate, the number of total fishing vessels in the world in the year 2016 was about 4.6 million, mostly operating in Asiatic regions. Fishing boats are grouped under 49315 CPC code and are usually classified using the size of the vessel, expressed in Gross Tonnage (GT) or length. This strictly statistical subdivision is in practical applications often replaced by a simplified form in which "large", "medium sized" and "small" vessels are distinguished. This above subdivision corresponds approximately to the area of operation of the vessel: large fishing vessels operate principally in open seas, medium sized vessels in the Exclusive Economic Zone (EEZ) marine areas and small decked vessels are predominantly used in coastal and sheltered marine and brackish waters. Another categorization is based on the type of fishing activity and processing carried out by the vessel, including trawlers (the ones that pull trawler nets against the ocean water) and non-trawling vessels (the ones that still use a net but the net is fixed and the fish swim to the net and get themselves caught).

1 In order to obtain a standard reference unit to normalize the environmental impacts of the operational phase
2 for fishing vessels, three parameters are recommended for this purpose: the quantity of landing [ton], the
3 covered distance expressed in kilometres [km] and the number of trips (unitless [#]) performed in the
4 analysed timespan, as shown in Eq.(6) of Table 1. The procedure to be followed to obtain a correct
5 normalization is detailed in the Supplementary Materials.
6

7 Despite the large variety of sizes and types, the available literature refers to LCA studies of fishery activities
8 in different geographical areas (*i.e.*, Mediterranean Sea, Baltic and North Sea). Among the five published
9 documents related to fishing vessels, three of them take into account trawlers, while only two refers to a
10 coastal purse-seining fleet. Unlike other vessel categories, the majority of LCA studies dealing with fishing
11 operations do not focus on a single vessel (*i.e.*, a specific case study), but rather a fleet of vessels. (Abdou et
12 al., 2020, 2018; González-García et al., 2015; Ramos et al., 2011). This outcome reflects the fact that fishing
13 vessels used in a geographical area are about the same size and use approximately the same level of
14 technology. Thus, it is interesting to investigate the forecasting of more efficient solutions to allow a correct
15 management and strategic planning of fishing activities.
16
17
18

19 All the papers adopted approximately the same functional unit, *i.e.*, “1 ton of landed round fish/landed
20 seafood in one year of operation” (Abdou et al., 2020, 2018; González-García et al., 2015; Ramos et al., 2011;
21 Ziegler et al., 2018). The operational phase is the most burdensome activity for this type of vessel due to the
22 fuel combustion which is necessary to reach the fishing site, perform the fishing activities and then process
23 the collected fishes, *i.e.*, making ice to preserve the catches. Most of these works dealt with the prospect of
24 processing fishes at on-shore facilities, so reducing fuel consumption and utilizing more sustainable energy
25 from the power grid. This sort of information may be used by producers to optimize production, and it can
26 also be utilized by enterprises further downstream in the value chain to adapt their sourcing strategy.
27 Increased knowledge of this variability might be utilized to enhance the fisheries management system by, for
28 example, creating the most resource-efficient geographical and temporal limits for fisheries and the
29 allocation of fishing rights. A common aspect among the analysed publications is related to the first step of
30 the LCA methodology (goal and scope definition), *i.e.*, a cut-off mass allocation method with a cradle-to-gate
31 perspective including shipbuilding activity, ship operations, and maintenance. End-of-life was neglected in all
32 research works due to uncertainty and lack of available data. Shipbuilding activity included materials used
33 for hull, fishing gear, engines, as well as paint and anti-fouling production which are also required during
34 maintenance operations. Ship operations included diesel consumption, marine lubricant oil, net
35 replacement, and ice consumption. Emissions to water, air and soil were also included within the system
36 boundaries. Primary life cycle inventory (LCI) data from different sources were integrated with background
37 data (*e.g.*, ecoinvent database) and LCIA results were reported mainly following CML-IA baseline and ReCiPe
38 midpoints indicators. Concerning primary data, specific maritime registers/organizations were contacted as
39 well as surveys were performed involving skippers and fishermen. Landings, vessel characteristics (beam, GT,
40 etc.), fishing operations, and fishing areas were the most relevant data obtained from the register. Gathered
41 data included vessels’ operational details (*e.g.*, fuel consumption, number of fishing trips, and number of
42 days at sea) and information about vessel construction (*e.g.*, the material used for construction, paint and
43 antifouling paint quantities, dimensions of vessels, life span). Fishing vessels’ features are provided in Table
44 5.
45
46
47
48
49
50
51
52

53 The results of LCA studies exhibit how the fishing vessel use phase is responsible of the highest impact along
54 the overall life cycle. The two works of Abdou et al., (2020, 2018) show that more than 96% of the overall
55 impacts for the majority of the environmental categories (CML-ADE, CML-ODP, CML-GWP, CML-EP, and
56 Cumulative Energy Demand-CED) are caused by (i) fuel and lubricating oil production, and (ii) seafood
57 production. On the other hand, the trawler and trawling net manufacturing contributed most to toxicity-
58 related impact categories. The same trend is shown by Ziegler et al (2018), who found that fuel production
59 and combustion dominated all conventional LCA impact categories, such as ILCD-CC, ILCD-AP, ILCD-Marine
60
61
62
63
64
65

Eutrophication (MEU), ILCD-PM, ILCD-POCP, and ILCD-Terrestrial Eutrophication (TEU), with the exception of toxicity-related impacts dominated by the manufacture of materials for fishing vessels and gear. Again, in the work of Ramos et al (2011), vessel operations were the major sources of environmental impacts related to fishery, considering all the conventional impact categories assessed, except for ODP and ADE. Diesel consumption was discovered to be the primary contributor to environmental effect within vessel operations for all impact categories, with the exception of METP, where the greatest burden was brought on by antifouling emissions to the ocean. The net production and transportation subsystem also appeared as an important contributor in ADE and GWP categories. Other relevant activities generating environmental impacts were the ice production system and, to a lesser extent, operations related to the construction and maintenance of the vessels (antifouling and steel production). Concerning the work of González-García et al (2015), results are reported in terms of [kgCO₂-eq/ton of landing] by using the ReCiPe midpoint LCIA method. Only a general overview of the LCA impact is reported, neglecting the splitting into shipbuilding, operations and end-of-life, even though the results are consistent with the findings of previous studies. The final goal claimed by this work is to estimate the environmental burdens related to operational inefficiencies, as well as to define target performance threshold for optimizing vessel operations. Even though it can be challenging to pinpoint the causes of inefficiency because fishing activity is so unpredictable, the main source of uncertainty appears to be related to operational and behavioral variations among skippers, while other crucial factors like the characteristics of the vessels did not correlate with the inefficiency values.

A summary of features of the analysed vessels are reported in Table 5. It is worth noticing that, due to lack of information (e.g., average fishing trip distance), it is not possible to perform the normalization procedure, neither report GHG-related results specific for each life cycle phase. The employment of different materials in shipbuilding and the geographical areas where fishing activities are carried out require a normalizing process to compare different fleets, which would be beneficial in comparing single fishing vessels. Nonetheless, the original scores are reported in Table S.3 of Supplementary Material.

Table 5: Fishing vessels' features of the available LCA studies

Type	Basque coastal purse-seining fleet	Norwegian demersal trawler	Wooden trawlers	Portuguese purse-seining fleet
Source	(Ramos et al., 2011)	(Ziegler et al., 2018)	(Abdou et al., 2020, 2018)	(González-García et al., 2015)
Production site	N.A.	N.A.	N.A.	N.A.
Production year	N.A.	N.A.	N.A.	N.A.
Operation location	Gulf of Biscay (Atlantic Sea)	Norwegian and Barents Sea	Gulf of Gabes (Mediterranean Sea)	Spanish and Portuguese coast (Atlantic Ocean)
Estimated lifetime [year]	N.A.	30	40	40
Number of vessels (fleet)	226	Single vessel	184	20
Length [m]	N.A.	N.A.	22-25	20
Mass Displacement [ton]	N.A.	N.A.	N.A.	N.A.
Deadweight (DWT) [ton]	N.A.	N.A.	N.A.	N.A.
Lightship weight (LWT)[ton]	N.A.	N.A.	105-115	N.A.
Main engine power [kW]	N.A.	N.A.	N.A.	N.A.
Auxiliary engine power [kW]	N.A.	N.A.	N.A.	N.A.
Single trips	N.A.	20/year	13-25/year	N.A.
Fuel type	N.A.	N.A.	N.A.	N.A.
Average fishing trip distance [km]	N.A.	N.A.	N.A.	N.A.
Landing per year [ton/yr]	5000	6200	6300	1000

3.1.5. Pleasure and sporting boats

Pleasure and sporting boats (also known as recreational crafts) are sorted into numerous main categories and subcategories, depending on their intended use and their size. They are all identified under CPC code 494, which comprehends sailboats, inflatable boats, motor crafts under 6 m, motor yachts under 24 m and motor superyachts over 24 m. Their purpose is generally a recreational use for sport or pleasure, including vessel categories such as (i) paddlesports boats (canoes, kayaks, rowing shells) for sports and recreational activities; (ii) dinghies (usually under 16 ft, 5 m) used for transfers from larger boats, powered by sail, small engines, or muscle power; (iii) runabouts (15–25 ft, 5–8 m) powerboats with either outboard, sterndrive, or inboard engines commonly used for pleasure activities like fishing, racing, boating or as a transfer service from larger vessels; (iv) daysailers sailboats (14–25 ft, 4–8 m) sometimes equipped with sleeping accommodation and a small auxiliary engine; (v) cruisers (25–65 ft, 8–20 m), *i.e.*, powerboats with cabins for accommodation; (vi) cruising and racing sailboats (25–65 ft, 8–20 m) which are sailboats with auxiliary engines and suitable for longer journeys.

With the aim of providing a benchmark to future investigations in this vessel category, the usage of a normalization basis that requires the inclusion of two parameters is recommended: the number of passengers transported ([#] unitless) and the average time [hr] spent on the boat offshore, as shown in Eq.(8) of Table 1. The procedure to be followed to obtain a correct normalization is detailed in the Supplementary Materials.

The rather small dimensions of these vessels allow various production materials using several manufacturing processes. Thus, most of the available literature deals with comparative LCA studies among suitable hull materials or hull manufacturing processes. Among the six published documents, three distinct papers focused on the hull production and disposal (Burman et al., 2014; Cucinotta et al., 2017; Önal and Neşer, 2018), while the other three from the same working group encompassed the entire vessel into the system boundaries (Favi et al., 2018b, 2018a, 2017).

The available research on this vessel category focuses mainly on studying various materials and hull fabrication procedures. The first investigation was published by Burman and colleagues (2014), who compared various materials for the hull production of a patrol craft, excluding from the system boundaries the shared elements among boat alternatives. Although the vessel under examination is not a pleasure boat, its structural characteristics, lifetime, and yearly fuel use are typical of a motor yacht. The authors chose “*one high-speed patrol craft (TTRB-2000) hull during 25 years of service*” as a functional unit and employed CML-IA method for the life cycle impact assessment phase. As a shared outcome with other studies, the use-phase unveiled as the greatest source of environmental burden-for the majority of impact categories. The features of the patrol craft are shown in Table 6. While the lack of information regarding the passenger capacity hinders the normalization of the usage phase, the mass of the hulls, *i.e.*, between 4.4 and 8.7 tons, has been normalized as reported in Table S.5 of the Supplementary Material for GHG-related impacts and graphically in Figure 4.

The study of Cucinotta et al. (2017) dealt with the comparison among different manufacturing processes for the production of the hull of a pleasure yacht, which is commonly made of a composite sandwich of glass fibre and polyester or epoxy resins. Two manufacturing processes were considered, *i.e.*, hand lay-up and vacuum infusion, characterized by different amounts of wastes and different weight of the final structure. In fact, vacuum infusion allows a higher glass fibre content, meaning that a lighter infused sandwich provides the same mechanical properties as a heavier one produced by hand lay-up technique. The system boundary comprehended the hull production from cradle-to-grave, with different use-phase and disposal scenarios. The functional unit, despite not clearly stated by the authors, appeared to be “*the hull manufacturing and usage for 25 years of service*”. Raw materials, production processes and end-of-life activities were related to

1 the hull only, while the operational phase and fuel consumption were calculated on the mass displacement
2 of the boats. This study, which was a comparative life cycle assessment of hull manufacturing methods,
3 ignored common materials and structures of the two vessels, as their impacts on the final results were equal.
4 The outcomes of the study demonstrated an overall improvement of environmental performances for
5 vacuum infusion, particularly for low usage scenario. The vessel details are shown in Table 6, while the
6 original and normalized results for GHG-related impacts (based on the LWT of the vessel, to allow
7 comparability with other works in this vessels category) are reported in Table S.5 of Supplementary Material
8 and graphically in Figure 4.
9

10 In the first paper of the group, Favi et al. (2017) employed CAD tool and shipyard information retrieved within
11 lightship weight document to obtain a detailed LCI for a pleasure yacht construction. In order to ease data
12 acquisition by manufacturers, vessel materials were sorted by functional groups, providing a benchmark for
13 future application. Both LCA and LCC were evaluated, focusing mostly on shipbuilding activities which have
14 been detailed using primary data. System boundary endorsed a cradle-to-gate perspective with various use
15 phase scenarios, exhibiting greater impacts from fuel (MDO) combustion during the operating phase,
16 regardless of the scenarios. The authors adopted "*the maritime operational activities and the transportation*
17 *of persons and goods by sea for a period of 20 years*" as a functional unit, claiming that could be elected as a
18 benchmark for different vessel categories. Although a unique functional unit for the maritime sector would
19 be practical, it would allow unfair comparison between vessels with different purposes, *e.g.*, a comparison
20 between a cargo vessel and a kayak for transportation. In fact, the horizontal normalization defined in section
21 3.2 only provides an overview of the design efficiency of the vessel compared to the actual one, failing to
22 account for the unique function offered by each vessel category. Several operating phase scenarios have
23 been studied, considering different annual usage of the superyacht (from 500 to 1,500 hr/year), which have
24 been compared using ReCiPe midpoint indicators. The outcomes shed light on the great influence of the
25 operating phase, as different operating scenarios strongly affect the final results, *i.e.*, for the longest usage
26 the GHG emissions almost doubles. In another paper dealing with the same vessel (Favi et al., 2018b), the
27 authors investigated different shipbuilding techniques (laser cutting, Shielded Metal Arc Welding - SMAW,
28 Gas Tungsten Arc Welding - GTAW and infusion) and materials for hull and hatches, including carbon steel,
29 aluminium and carbon fibre composite. The LCIA results showed that aluminium hulls had better
30 environmental performance (particularly in terms of ecotoxicity and metal depletion), with marginal gains
31 when carbon fiber composite hatches were used. The vessel details are reported in Table 6, while the
32 normalized results are shown in Figure 4. The authors further extended their previous works through a
33 collaboration with several Italian shipyards in order to provide an LCA/LCC tool for calculation of pleasure
34 yachts' environmental footprint (Favi et al., 2018a). The proposed methodology recommended the utilization
35 of a singular functional unit, similar to the previous one, which could be adapted to every vessel category:
36 "*the construction and the disposal of a vessel for the transportation of persons and goods and/or operational*
37 *activities by sea for a period of T years*", where T represents the lifespan of the vessel (commonly 20-25
38 years). This definition broadens the system boundaries endorsing a cradle-to-grave perspective, where
39 operational and end-of-life scenarios are employed to model the impact of the ship after the production
40 phase. Although this functional unit looks practical and easy to implement, the development of a specific
41 functional unit for each peculiar vessel type may prevent an unfair comparison between vessels belonging to
42 different categories, as previously stressed. Nevertheless, the authors presented a detailed and valuable
43 guideline for LCA practitioners in the maritime sector, splitting the vessel into its constitutive functional
44 systems and specifying the data source for compiling a reliable life cycle inventory. A comparative cradle-to-
45 grave LCA on three pleasure boats is used to support this guideline, and the results are shown in Table 6.
46 These results are consistent with the general pattern of locating the greatest impacts during the operational
47 phase. The impact assessment has been performed using midpoint ReCiPe method in combination with
48 Cumulative Energy Demand (CED), even though the authors report the results for Climate Change (tCO₂-eq)
49 only. The results gained by Favi and colleagues (2018a) are reported in Table S.5 of Supplementary Material,
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

along with the normalized scores obtained through the normalization procedure. The most burdensome operational phase is exhibited by the aluminium yacht (P140), followed by the steel/aluminium vessel (C136) and the glass-fibre one (CNR43). Apart from the operating phase, the shipbuilding operations produce equivalent outcomes. When comparing the end-of-life benefits of the different vessels, CNR43 has the lowest benefit since polymer-based materials are primarily landfilled, whereas metal-based yachts have higher benefits because of their high recycling rates (Figure 4).

Focusing on different shipbuilding techniques and various recycling practices, Önal and Neşer (2018) analysed the manufacturing and EoL phases of a glass-reinforced polyester vessel hull of a recreational boat. The functional unit was defined as “the complete life cycle of 11 m long GRP boat hull; produced in Izmir (Turkey), excluding operation stage of the boat and recycled in a Turkish state-of-the-art recycling system”. Primary data was collected from interviews and site visits at the shipyard, while secondary data was retrieved within ecoinvent database. The LCIA calculations have been performed on SimaPro using CML-IA baseline impact categories. The results for composite hulls show that vacuum infusion has a slightly larger environmental impact (approx. 2.5%) than hand lay-up due to its higher energy consumption, but there is also a lower chance of occupational health problems, thanks to the usage of a lower amount raw materials in a closed mould. The findings of Cucinotta et al. (2017), which revealed that vacuum infusion performed better in every impact category, are in conflict with Onal’s findings. Even though Cucinotta's study appears to be more accurate as a result of a deeper analysis of the manufacturing processes, more investigation is still required to fully comprehend this topic. With the exception of TETP, Photochemical Oxidant Formation Potential (POFP), and AP, the comparison of the disposal scenarios suggests that mechanical recycling, followed by the granule extrusion method, has lower environmental burdens. Among the end-of-life alternatives, landfill shows the highest environmental impacts, while composite recycling showed the best performance. However, even if the process of recycling for composites hull seems beneficial in terms of environmental impacts, its technological feasibility is still an unresolved issue.

Table 6: Pleasure vessels’ features of the available LCA studies

Type	TTRB-2000 Patrol Craft	Motor Yacht	"Supercoronero" Yacht	Superyachts	Weekender Boat
Source	(Burman et al., 2014)	(Cucinotta et al., 2017)	(Favi et al., 2018b, 2017)	(Favi et al., 2018a)	(Önal and Neşer, 2018)
Production site	Sweden	Italy	Italy	Italy	Turkey
Production year	N.A.	2006	2016	N.A.	N.A.
Operation location	Sweden	Mediterranean Area	World	Mediterranean Area	Mediterranean Area
Estimated lifetime [year]	25	25	20	20	10
Maximum speed [knots]	33	33	15	15-38	N.A.
Mass Displacement [ton]	27.4-33.6	34.284	432	N.A.	N.A.
Deadweight (DWT) [ton]	N.A.	3	42	N.A.	N.A.
Lightship weight (LWT)[ton]	4.4-8.7 (Hull)	28.150-31.284	390	230-390	4
Main engine power [kW]*	N.A.	2x820	2x1,081	2x1,081 2x1,045 4x1,939	N.A.
Auxiliary engine power [kW]*	N.A.	16	2x125	2x125, 1x55 2x100 2x80	N.A.
Fuel type	MDO	MDO	MDO	MDO	N.A.

Passenger capacity	N.A.	6	10	10	N.A.
Average offshore period [hr/yr]	1,000	200-500	500-1,500	500	N.A.

**If more than one engine was present, the number of engines was specified, along with the specific engines power*

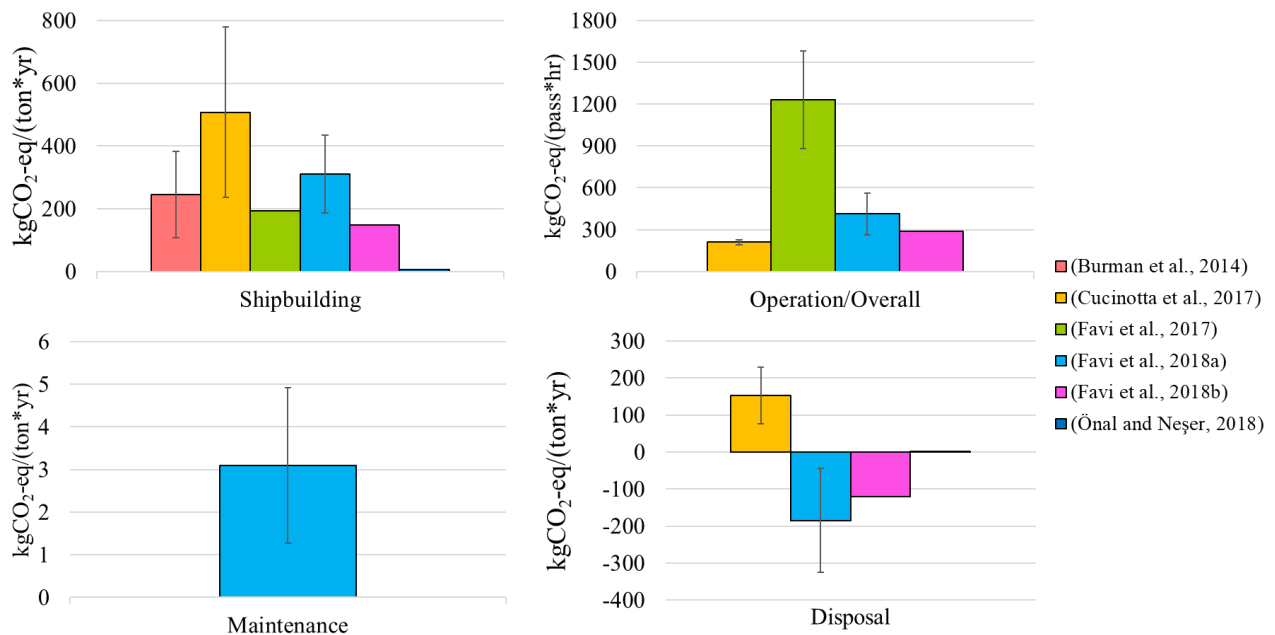


Figure 4: GHG-related normalized scores for Pleasure and Sporting Boats. Error bars are reported when multiple outcomes, e.g., sensitivity analyses or different vessel configurations, have been evaluated by the original authors

It is essential to keep in mind that, notwithstanding the normalization procedure, the outcomes are hardly comparable, due to different functional units (entire vessel, hull or engines only), system boundary (exclusion of raw materials, transports of life cycle phases), allocation not clearly defined, or aggregation of the outcomes in a single score. Shipbuilding activities involving the construction of vessels' structures produce GHG emissions in the range of 10^2 kgCO₂-eq normalized on LWT and lifespan, which are coherent with the emissions related to the shipbuilding of other vessel types using the same construction material. For each passenger carried for one hour, 10^2 - 10^3 kgCO₂-eq are emitted by operating activities. These outcomes, averaged among various works and strongly dependent on estimated operational profiles, exhibit the impact of leisure activities of motor yachts, which usually have low passenger capacity and high fuel consumption.

3.1.6. Other vessels categories and naval systems

Following the LCA principles, research was done on additional vessel classifications that weren't included in the earlier parts. These analyses, though, are constrained and isolated. For example, only two publications from the same research group dealt with tugboats' characteristics (Jeong et al., 2018; Wang et al., 2020), both focusing on optimising the power system and its application offshore. A tugboat, often known as a tug, is a nautical vehicle that pushes or pulls other vessels using direct contact or a tow line. Tugs usually tow ships that can't move on their own, including barges, damaged ships, log rafts, or oil platforms. Tugs are powerful and durable for their size, and they are designed based on the environment they operate in, such as ocean-going tugs, icebreakers or salvage tugs.

As previously reported, Jeong et al. (2018) developed a comprehensive tool for determining the optimum ship design among numerous options in terms of long-term cost and environmental implications. The characteristics of the tugboat under investigation are reported in Table 7. Two different power system designs and flexible engine operating scenarios were examined, with one of the setups resulting in less engine running hours since the burden was spread more evenly across the engines. A slower pace would be desirable in terms of cost-benefit analysis and environmental effects, according to various speeds that have been

assumed. These conclusions are helpful for different operating procedures. Using Eq.(7) of Table 1, the data were normalized using the weights of the engines under investigation, 102 and 36 ton for the basic case and alternate option, respectively. The results are shown in Table 7.

The life cycle performance of a tugboat (Table 7) was evaluated by Wang et al. (2020), who carefully compared various propulsion system configurations and chose the best system with the lowest emissions release, costs, and hazard implications. The authors employed a self-developed software (ShipLCA) as a decision-making tool to help identifying the optimal setup in terms of selecting engines, configuring systems or using different electricity sources. Results are expressed in terms of GWP and AP by adopting CML-IA as LCIA method, while the functional unit was defined, as *“the quantified ship performance during its service”*. This choice was done by the authors to allow the end-users to set up an assessment based on a different objective. Primary data related to engine consumption during operational activities and fuel supply chain scenarios were coupled with background data retrieved from the Gabi database. The findings are consistent with LCA studies conducted on other vessel categories, as the ship operation exhibits the highest share of environmental impacts, both in terms of GWP and AP. The use phase accounts for approximately 90% for the GWP and about 98% for the AP in relation to the total impact, regardless of the engine technology. It is worth highlighting that the shipbuilding and end-of-life phases were considered only for the engine module, and not for the entire ship. Although the operating phase emissions are well described by the developed tool, the results reported within the paper for the shipbuilding and decommissioning phases are not consistent between the two calculation methods. (GaBi tool and ShipLCA). Because no additional information was provided to fill this gap, and no data about shipbuilding or decommissioning was provided, it is difficult to determine the cause of this mismatch.

Park et al. (2020) evaluated the environmental benefits of the LNG partial re-liquefaction system applied to LNG carriers by comparing five different combination/configuration of LNG re-liquefaction systems. An LNG carrier is a tank ship designed for transporting liquefied natural gas (LNG) and it might be thought of as a peculiar kind of tanker. Since the gas is transported in liquid phase, pressures much greater than atmospheric one and/or very low temperatures are required. Therefore, LNG carriers can be classified as (i) fully pressurized, (ii) semi-pressurized and refrigerated, and (iii) fully refrigerated. Looking at the work of Park et al. (2020), the authors performed LCA analysis to evaluate the environmental benefits of a LNG partial re-liquefaction system applied to LNG carriers by comparing five different combination/configuration of LNG re-liquefaction systems (Table 7). Since the analysis is focused at the operations on-board of the vessel, materials and manufacturing of the vessel itself were neglected, as well as the vessel decommissioning. Results are expressed in terms of GWP, AP, POCP and PM2.5 by adopting CML-IA as LCIA method. In this case the functional unit was set as *“a system capable of re-liquefying 4000 kg of the BOG (Boil Off Gas) in an hour for 25 years”* for a comparison purpose. Primary data related to re-liquefying systems were estimated on the basis of data from manufacturers and coupled with background data retrieved from the Gabi database. The results revealed that the use phase is the most burdensome, accounting for around 98% for the GWP indicator (88% refers to the re-liquefaction process while 11% to the fuel production). It is worth noting that the manufacturing and scrapping phases are solely concerned with the re-liquefying system, ignoring the ship's other components. There is a disparity between the five systems studied, which reflects variances in fuel use during the operational phase. The outcomes of the LCA study (only GWP) are reported in Table S.6 of Supplementary Material.

Table 7: Other vessels' features of the available LCA studies

Type	Tugboat	“Salvation 21” Tugboat	Re-liquefaction systems applied to LNG carrier
Source	(Jeong et al., 2018)	(Wang et al., 2020)	(Park et al., 2020)
Production site	N.A.	N.A.	China
Production year	N.A.	N.A.	N.A.

Operation location	South Korea	South Korea	USA and South Korea
Estimated lifetime [year]	30	30	25
Service speed [knots]	N.A.	N.A.	N.A.
Mass Displacement [ton]	2270	N.A.	N.A.
Deadweight (DWT) [ton]	N.A.	156	115,541
Lightship weight (LWT) [ton]	N.A.	N.A.	N.A.
Main engine power [kW]*	2x4,500 4x2,200	2x1,518 3x1,062 2x1,062 4x761 3x761	2x18,200
Auxiliary engine power [kW]	N.A.	N.A.	N.A.
Fuel type	MDO	HFO	HFO
Single Trips	N.A.	N.A.	155/lifetime
Average distance travelled by cargo [km]	N.A.	N.A.	27,000 (estimated)

*If more than one engine was present, the number of engines was specified, along with the specific engines power

Two works (Andersson and Winnes, 2011; Jang et al., 2020) focused on the operational profile of maritime vessels using an exhaust gas cleaning system (commonly called scrubber system) installed on-board of the vessel to remove SO_x and particulate matter (PM) emitted by conventional engines. The two papers examined the trade-off between the benefits received from the deployment of a scrubber system throughout the course of a ship's entire life cycle and the drawbacks produced by its fabrication and installation. In the work of Andersson and Winnes (2011), the LCA performances of the installation and usage of various scrubber systems on-board of a RoPax vessel (called Stena Britannica) was assessed. On the other hand, the research of Jang et al. (2020) focused on scrubber systems used by generic Ro-Ro vessels and offered a decision-making tool for the design of a scrubber system in the early stages of design (considering vessel size, engine power and service lifetime). The results of these works are expressed using the most common LCIA indicators (*i.e.*, GWP, EP, AP and HTP) following the CML-IA method. Despite the analysis was performed on the same system the results are significantly different: in the work of Andersson and Winnes (2011), an open loop scrubber system is preferred since less materials and components are required compared to a closed loop scrubber system. This result is in contrast with the outcome of Jang et al. (2020) study, where closed-loop scrubbers show better performance than open-loop scrubbers in terms of GWP and AP, whereas the opposite trend is found for EP. However, two parameters result dominant on the holistic environmental impacts of SO_x scrubber systems: the power and the year (age) of operation. As a common outcome, even if scrubber systems contributed to the AP reduction, they were shown to exacerbate other environmental impacts such as GWP and EP.

As a conclusion, for other types of vessels which have a peculiar operational profile and purpose, the focus of the LCA analysis was not the entire vessel, but rather the equipment and the emissions related to the activity that is taking place on-board. The usage phase is the most significant among the other phases in the LCA, which is carried out taking into consideration the whole life cycle of the ship or naval system under study (*i.e.*, equipment manufacturing, installation and decommissioning). Finding a functional unit to standardize the LCA analysis and enable comparisons between various works is challenging for these vessel categories.

3.2. Horizontal normalization based on vessel features

The following findings are the result of a normalization of LCA outcomes based on the primary vessel characteristics (*i.e.*, weight and power). The horizontal normalization, carried out independently from the vessel categories, allows for comparison of LCA outcomes, offering an overview of distinct ship category clusters and an associated index for assessing their efficiency. Due to a scarcity of data reported in the referenced papers, only a subset of vessels was examined in this horizontal normalization. Vessels features

of the considered works are reported in Table 8 and the horizontal normalization was performed using the Eq.(9) previously defined. The comparison was done taking into account four vessel categories: (i) pleasure and sporting boats, (ii) ferries, (iii) tankers, and (iv) cargo. For other vessel's categories, data for the horizontal normalization were not available.

Table 8: Vessels' features of the available LCA studies for horizontal normalization

Category	Authors	LWT [ton]	Power [kW]	Power/LWT ratio [kW/ton]	GWP shipbuilding [kg CO ₂ -eq]	GWP operation [kg CO ₂ -eq]	LES [% kg CO ₂ -eq]	Efficiency Ratio [%kg CO ₂ -eq/kW/ton]
Pleasure - C136	(Favi et al., 2018a)	390	2,467	6.33	1.76E+06	2.97E+07	5.93E-02	9.37E-03
Pleasure - CNR 43		280	2,290	8.18	1.04E+06	2.65E+07	3.92E-02	4.80E-03
Pleasure - P140		230	7,916	34.42	2.00E+06	5.63E+07	3.55E-02	1.03E-03
Pleasure - Infusion	(Cucinotta et al., 2017)	28	1,640	58.26	1.66E+05	5.72E+06	2.91E-02	4.99E-04
Pleasure - Hand Lay-up		31	1,640	52.42	6.09E+05	1.71E+07	3.56E-02	6.78E-04
Ferry - Reference	(Blanco-Davis et al., 2014)	13,635	48,000	3.52	2.89E+07	1.83E+09	1.58E-02	4.49E-03
Ferry - with coating		13,635	48,000	3.52	2.89E+07	1.69E+09	1.71E-02	4.86E-03
Tanker 1	(Chatzinikolaou et al., 2015)	13,925	14,520	1.04	2.29E+07	1.07E+09	2.14E-02	2.05E-02
Tanker 2	(Quang et al., 2021)	13,925	14,520	1.04	3.62E+07	1.77E+09	2.05E-02	1.96E-02
Cargo 1	(Dong et al., 2019)	11,400	8,830	0.77	4.37E+07	6.08E+08	7.19E-02	9.28E-02
Cargo 2		12,200	8,830	0.72	4.39E+07	9.33E+08	4.70E-02	6.49E-02
Cargo 3		11,400	8,830	0.77	4.37E+07	5.77E+08	7.58E-02	9.79E-02
Cargo 4		12,200	8,830	0.72	4.39E+07	8.85E+08	4.96E-02	6.85E-02
Cargo 5	(Quang et al., 2020)	11,400	8,830	0.77	4.79E+07	9.60E+08	4.99E-02	6.44E-02

In the case of pleasure and sporting boats, the paper published by Favi et al. (2018a) assessed three motor yacht, whose Power/LWT ratio ranges from 6.33 to and 34.42 kW/ton, while Cucinotta et al. (2017), employed two different manufacturing processes for the construction of the same hull, leading to different lightship weights (28-31 ton). Considering that the yacht's installed engines were of equal power, the Power/LWT ratios are 58.26 kW/ton for the yacht manufactured with infusion process, and 52.42 kW/ton for the yacht manufactured with hand lay-up process. The research published by Blanco-Davis et al. (2014) deals with two ferry configurations: (i) one that serves as a benchmark, and (ii) one that has a fouling release coating applied, with an identical Power/LWT ratio of 3.52 kW/ton. In the case of tankers, Chatzinikolaou et al. (2015) and Quang et al. (2021) took into account the same vessel with a power/weight ratio of 1.04 kW/ton. Due to the fact that the same type of vessel was analysed with small differences in terms of GWP, the horizontal normalization shows very similar results. Two publications fell into the cargo vessel category. The work of Dong et al. (2019) takes into account four configurations of two vessels with identical engine power, one of which was also considered in the work of Quang et al. (2020). In the case of cargo vessels, the power/weight ratio is ranging from 0.72 and 0.77 kW/ton.

An overview of the results obtained for the horizontal normalization is presented in Figure 5. The size of the bubbles represents the vessel design efficiency (power/weight ratio) and it is calculated as the ratio between the main engine power [kW] over the lightship weight [ton]. The larger the bubble, the higher the ratio, indicating that the engines are oversized to increase navigation speed. In Figure 5, the Y-axis represents the Lifecycle Emission Share (LES), and the X-axis shows the Efficiency Ratio. The LES is calculated dividing the "Impacts of shipbuilding operations and construction materials" by the "Impacts of operational phase". This index indicates the share of environmental impacts generated during shipbuilding activities in

comparison to the navigation/use phase, which is typically the most critical phase in terms of GHG emissions. The meaning of the LES reflects the efficiency of the vessel during the operational phase in terms of emissions, therefore, the increase of the LES is achieved by reducing the emissions during the operational phase, keeping the emissions during the shipbuilding operations constant. The higher LES, the lower the relevance of the operational phase in terms of environmental burden. The Efficiency Ratio, which expresses the normalization of the lifecycle emissions in relation to the vessel features, is derived by dividing the LES by the power/weight ratio. The bigger this index, the most efficient is the vessel (low power/weight ratio and low impacts related to the operational phase) meaning that the engineering design of the vessel was properly done.

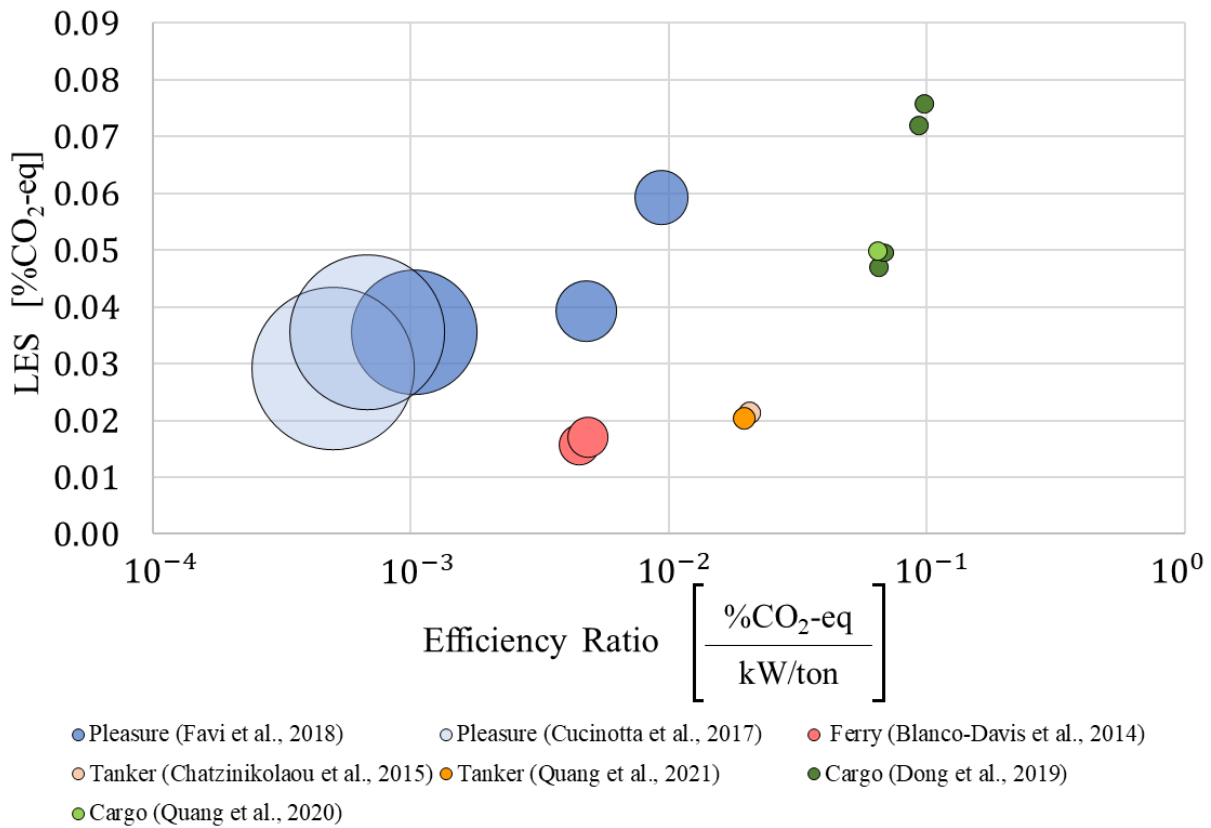


Figure 5: horizontal normalization and comparison among different vessel categories for GHG-related impact categories.

Based on the aforementioned parameters, it is possible to clearly identify four areas of the graph that characterize each analysed vessel category (Figure 5). The pleasure boats are located in the central-left area of the graph. They are characterized by a high power/weight ratio (big size of the bubbles) due to the fact that the engines are usually oversized in relation to the lightship weight. Indeed, the choice of installed power for this type of vessel is not based on the engineering optimization but rather on producing high performance vessels. Although their specific emissions are significant (due to oversized engines), their modest utilization counterbalance their poor environmental performances, narrowing the potential gap between their LES and that of more efficient vessels. For this type of vessel, the Efficiency Ratio ranges from 10⁻⁴ to 10⁻² indicating unequivocally that it is the most critical category in terms of environmental impacts. Cargo vessels, on the other hand, are positioned in the upper-right corner of the graph due to their low power/weight ratio (small size of the bubbles), high LES, and high Efficiency Ratio. Commonly, their engines are sized to minimize fuel consumption throughout the operational period (for cost minimization), but the environmental impacts related to the use phase is significantly more relevant than the shipbuilding ones, owing to long navigation periods. Cargo vessels have one of the highest Efficiency Ratios among all vessel categories, with a magnitude of 10⁻¹ ranking them among the most efficient in terms of environmental performance. Similar behaviour is

1 noticed for the tankers, with a comparable value of the power/weight ratio (small size of the bubbles) but a
2 lower value of the LES. In this case, they are mostly positioned in the central part of the graph, leading this
3 vessel category close to the cargos for what concern the environmental performance (e.g., the Efficiency
4 Ratio is between 10^{-2} and 10^{-1}). Ferries are characterized by a quite relevant power/weight ratio (the size of
5 the bubbles is between the tankers and the pleasure boats) while the LES is the lowest among the vessel
6 categories. This is likely caused by the use-phase emissions, which are more significant because of the large
7 number of manoeuvring operations at the port and the higher speed required during navigation. Due to these
8 factors, the environmental consequences associated with shipbuilding activities are less significant than
9 those associated with the operation phase, placing this vessel category within the central-bottom portion of
10 the graph. For this vessel category, the Efficiency Ratio is between 10^{-3} and 10^{-2} , making ferries one of the
11 most impactful categories after pleasure boats.
12
13

14 3.3. Publications on vessel-related activities 15

16 Several activities are associated with maritime vessels and they were analysed independently from the vessel
17 categories. Based on the review of the literature, a possible classification of these activities is proposed: (i)
18 shipyard manufacturing and maintenance activity, (ii) port activity, and (iii) ship breaking activity.
19
20

21 Concerning the shipyard manufacturing activity, two works of Favi et al. (2019b, 2019a), described an ISO-
22 compliant procedure to perform a LCA analysis of complex welded structures (*i.e.*, the ship hull) by using
23 engineering design documentation, reducing the uncertainty related to primary data. The functional unit was
24 defined as “*the manufacturing, use, and disposal of a welded structure able to guarantee the engineering*
25 *requirements (according to a specific standard) in terms of strain, stress, and corrosion allowance over the*
26 *expected lifetime of T-years*”. The functional unit refers to a specific lifetime, and T represents the lifespan of
27 the product specified at the beginning of the project. Primary data was collected from engineering design
28 documentation (*i.e.*, CAD model, welding procedure specifications, etc.), while secondary data was retrieved
29 withinecoinvent database. ReCiPe impact assessment method (both midpoint and endpoint impact
30 categories) was coupled with the CED method for the LCIA. The data collecting and management for large
31 and complex welded structures were the two works' main objectives. The first one was mainly focused on
32 the analysis of products/structures manufactured with metal arc welding technology (Favi et al., 2019a),
33 while the second one provided also a tool for the welding technologies comparison (Favi et al., 2019b). The
34 comparison of welding technologies shows how there is not an optimal solution for the development of
35 welded structures, such as ship hulls. Indeed, the GMAW (Gas Metal Arc Welding) process exhibits the least
36 environmental burden for most of the environmental indicators compared with other processes, but it
37 performs quite badly in terms of human toxicity, which is directly connected with fume emissions. The LCA
38 comparison of welding processes allowed the authors to define several design actions aiming at reducing the
39 environmental impacts related to the manufacturing of welded structures, among which a possible measure
40 to control the impact of filler material is the adoption of a different bevel geometry (*i.e.*, narrow bevels) that
41 minimizes the amount of filler material. According to an analysis of the structures manufactured with metal
42 arc welding technology, carbon steel seems to be the most suitable material for the construction of ship hulls,
43 being aluminium more impactful for most of the environmental indicators, except for ODP, Metal Depletion
44 (MD), Ionizing Radiation (IR), and HTP. From the environmental perspective, the authors claimed that the
45 adoption of carbon steel is a preferable solution if the analysis is limited to the shipbuilding activities.
46
47
48
49
50
51
52
53

54 Despite the fact that port operations are an integral part of a vessel's operating activities, they are rarely
55 included within the life cycle of vessels. For this reason, port activities are commonly analysed using a
56 different functional unit, which is not strictly related to the vessel itself. In terms of port activities, the work
57 of Zuin et al. (2009) analysed the ship waste streams in a specific location (the Port of Koper, Slovenia),
58 attempting to quantify the impacts of cargo vessel-generated waste in order to identify the critical
59 procedures. The functional unit was defined as “*the average annual amount of cargo-generated waste*
60 *collected and managed in Luka Koper in 2007 (i.e., 2200 tonnes/year of cargo)*”. Both primary data collected
61
62
63
64
65

1 directly from the port and secondary data retrieved by the ecoinvent database were used in the analysis.
2 EI99 impact assessment method was used as LCIA method, including both midpoint and endpoint indicators.
3 To increase the awareness of decision-makers, environmental concerns resulting from ship waste
4 management and disposal beyond the port region (e.g., landfill, incinerator, etc.) were also assessed. The
5 waste streams analysed in this work included mixed solid waste, biodegradable waste (*i.e.*, kitchen waste),
6 wastewater (*i.e.*, oily bilge waters), and other residues. Based on LCA outcomes, sea ports produce large
7 amounts of oily and solid waste, as well as chemical hazardous residues, that require a sustainable disposal
8 practice. To promote a more sustainable management of port waste, the legislative framework created in
9 this context specifies the minimal standards for waste disposal. There is a need to stimulate more measures
10 focused at increasing the reduction, recycling, and reuse of ship-generated waste. Indeed, the assessment
11 results showed that producing secondary fuels during the waste treatment phase provides for a partial
12 reduction in impacts by limiting the depletion of fossil resources, such as natural gas and coal, as well as air
13 emissions. The analysis also showed that the final treatment of ship garbage, specifically landfill disposal, was
14 responsible for the majority of all environmental problems. Another work related to the port activity was
15 performed by Dvarioniene et al. (2013) with a specific focus at the oil waste management from ship engine
16 bilge entering in the Klaipeda Sea Port, Lithuania. A life cycle assessment was performed to evaluate the
17 environmental impacts caused by the ship-generated waste management, focusing on oily waters. The
18 functional unit was defined as “*ship-generated waste, focusing on oily waters, of the port of Klaipeda in 2007*
19 *and 2008*”. Oil water management for all stages of the life cycle was equalized to CO₂ gas effect expressed as
20 kgCO₂-eq, according to IPCC indicator. The analysis estimated that oil waste constitutes the majority of the
21 whole collected waste amount. The prospect of using engine bilge water as a source of thermal energy by
22 combustion is a viable method for reducing greenhouse gas emissions connected to engine bilge water. A
23 suitable improvement towards this direction is represented by the usage of the generated thermal energy to
24 cover the engine bilge water treatment process, reducing the carbon footprint by 60%.

31 Shipbreaking (or dismantling) is a crucial process that enables the replacement of out-of-date ships and the
32 recycling or reuse of up to 95% of their materials, modernizing global shipping commerce. Ocean-going ships
33 are usually sent for dismantling after serving the global shipping fleet for 20–30 years. Bangladesh is
34 dominating global shipbreaking processing with more than 2,300,000 LWT processed in 2009 (Sujauddin et
35 al., 2015). Several works have been published in relation to the shipbreaking segment, utilizing an LCA
36 approach to address the environmental issues associated with the shipbreaking activities (Choi et al., 2016;
37 Ko and Gantner, 2016; Önal et al., 2020; Rahman et al., 2016). Choi et al. (2016) analysed the ship disposal
38 management options with economic cost-benefit features and life cycle thinking approach, while Rahman et
39 al. (2016) proposed an LCA analysis to compare rebar production in Bangladesh using secondary steel scraps
40 recovered from ship recycling, reaching equivalent conclusions. Focusing on the work of Choi et al. (2016),
41 current scenarios for end-of-life ship management were addressed both in terms of economic feasibility and
42 environmental impacts. Although recycling is the most frequent technique of end-of-life ship management,
43 other options were studied, including (i) dry-dock ship breaking, (ii) beaching, and (iii) reefing. The functional
44 unit was defined as “*the lightship weight (LWT) of the recycled ship*” considered for each disposal scenario.
45 Primary data were collected directly from the ship breaking yards and recycling facilities when available,
46 while secondary data were retrieved within the ecoinvent database. To assist the economic evaluation from
47 a sustainability standpoint, a cost-benefit analysis was integrated into the life cycle study. Even though ship
48 recycling appears to be the most ecologically beneficial choice according to the TRACI midpoint impact
49 assessment method, it only delivers a marginal economic gain. Standard ship breaking techniques prevent
50 the release of harmful contaminants into the environment while also reducing the demand for numerous
51 virgin materials. However, when compared to recovered materials from dry-dock ship breaking process,
52 recovered materials from beaching did not show significantly greater environmental impacts. This is primarily
53 due to a lack of data and great uncertainty in estimating the environmental impact of ship recycling using
54 beaching methods. Limited information prevented a numerical study of the reefing alternative, and only a
55
56
57
58
59
60
61
62
63
64
65

1 review of the literature was conducted to address the key environmental problems of this process. The
2 environmental implications of rebar manufacturing from recovered metal, produced from ship recycled iron
3 scraps, were investigated in the work of Rahman et al. (2016). The functional unit was defined as “one ton of
4 rebar produced at a manufacturing facility”. Primary data were gathered through direct interviews with local
5 workers and managers at ship breaking sites, while secondary data were retrieved from theecoinvent
6 database. IPCC 2013 100a and IMPACT 2002 were employed as LCIA methods to include both midpoints and
7 endpoints perspectives. According to the LCA results, the environmental benefits (up to one order of
8 magnitude per indicator) are evident when compared to manufacturing processes utilizing raw materials,
9 even though the recycling of steel from ship waste is still hazardous and harmful from a social perspective.
10 In summary, the most critical phase of the ship recycling process involves rerolling, followed by in-yard
11 processing and ship cutting. The authors claimed that using rebar made from ship recycling scraps saved
12 16,492 MJ worth of resources and avoided 1,965 kgCO₂-eq emissions per ton of final product.
13
14

15 In their publication, Ko and Gantner (2016) used LCA for the quantification of the environmental impacts of
16 a vessel, coupling this result with economic benefit of each phase of the vessel life cycle. The goal of this
17 study was to determine the added value of ship operations (*i.e.*, shipbuilding, operations, and shipbreaking)
18 in various geographical areas. The authors underlined that ship owners benefit the most during the vessel
19 use phase, whereas environmental burdens per unit of added value are significantly higher for Asian ship
20 builders and wreckers. The analysis was conducted using the functional unit of “one ship with a light
21 displacement tonnage (LDT) of 4,108.4 over the lifetime of 25 years”. GaBi software was used for both
22 computational analysis and background data. Two impact categories were chosen to display the
23 environmental results, *i.e.*, CC base on ReCiPe and HTP-non cancer based on USEtox method. Unfortunately,
24 the LCA results were not reported within the paper, but only aggregated results.
25
26
27
28

29 Following their first publication dealing with yachts, the second work of Önal et al. (2020) focused on the end
30 of life of steel hull boats, using a functional unit of “a ship of its kind built in the Tuzla Shipyards Zone, Istanbul,
31 Turkey, and recycled in the Aliğa Ship Recycling Zone, İzmir, Turkey during 2008–2018”. SimaPro was used
32 for the computational analysis and CML-IA method was adopted for LCIA. The shipbuilding phase for the steel
33 hull gained higher environmental impacts when compared to material recycling processes. It is worth noticing
34 that the system boundaries of the ship recycling process do not include the benefits related to the recycled
35 material. Moreover, boats with complex shapes (fishing boats, yachts and sailboats) generates a higher
36 environmental impact than ships with more regular shapes such as barge, tanker, bulk carrier, passenger and
37 service boats. Thus, designing an easy-to-dismantle ship in terms of energy (for all the shipbreaking activities)
38 and materials results in eco-friendly shipbuilding and ship recycling. In conclusion, shipbreaking is a crucial
39 stage in the life cycle of a vessel and must be taken into account for a cradle-to-grave approach. Even if the
40 impacts related to this phase are not negligible, shipbreaking activities are critical to manage due to the long
41 lifespan of a vessel and the uncertainty related to the vessel's end-of-life.
42
43
44
45
46

47 4. Conclusion

48 In this review, the scientific literature concerning LCA studies applied to the naval sector has been
49 investigated using two perspectives: in the first section, a bibliometric analysis and the main trends of the
50 research were analysed (Mio et al., 2022), while in the second section, a quantitative analysis and
51 normalization of the LCA outcomes were undertaken.
52
53

54 The second part of this review focused on the quantitative analysis of the outcomes of the scientific literature
55 dealing with LCA studies applied to the naval sector. Before delving into the descriptions of the assessments,
56 the introduction of the normalization stage outlined in the ISO standard has been carried out, and a list of
57 suggestions for naval practitioners has been compiled. The first recommendation prescribed to disaggregate
58 the overall life cycle impacts of the vessel into the impacts specific for each life cycle phase (*i.e.*, shipbuilding,
59 operation, maintenance and disposal). A peculiar normalization basis has been suggested for each life cycle
60
61
62
63
64
65

1 phase, aiming at producing consistent results among different studies, allowing future comparisons.
2 Shipbuilding, manufacturing and disposal impacts should be normalized on lightship weight and lifetime of
3 the vessel, allowing for comparisons focused on construction materials and good manufacturing practices
4 rather than ship size. The results presented hereafter provide a comparison of LCA analysis.

5 Operational phase impacts (as well as overall life cycle ones) may be normalized using a vertical or a
6 horizontal approach. The former is based on the function provided by each specific vessel group and allows
7 to identify the emerging trend and some benchmark values for practitioners dealing with peculiar vessel
8 categories. The latter provide the Efficiency Ratio, which enables a comparison between the operational
9 activities of vessels belonging to any vessel category. This enables the adoption of engineering eco-design
10 actions to promote cleaner ship development and use.
11
12

13 The 47 articles, selected using the procedure reported in the first part of this review (Mio et al., 2022), have
14 been classified according to vessel types (using CPC codes), reporting a description of the assessments and
15 the results of GHG-related impact categories, which have been subjected to the proposed normalization
16 procedures.
17
18

19 It is possible to establish some benchmark values for each stage of the vessels lifecycle in relation to the
20 vessel category by looking at the results of the vertical normalization. Indeed, without normalization, the
21 identification of average scores for each lifecycle phase is quite challenging, as the outcomes are hardly
22 comparable due to different functional units, system boundaries and allocation models. Taking into account
23 the outcomes from the publications dealing with hulls or entire vessels, the shipbuilding GHG-related impacts
24 can be compared in terms of shipbuilding materials (*i.e.*, steel, aluminium, wood and composite material), as
25 shown in Figure 6. It appears clear how steel-made vessels gained better average performance in comparison
26 with vessels built using other materials. The assessments dealing with large ships (cruise, tanker, and cargo)
27 are driving this general trend, as there is a benefit associated to economies of scale, the use of diverse
28 materials is impractical and more assumptions must be made during the life cycle inventory gathering
29 process, which may lead to an underestimation of the emissions. When steel is used for smaller vessels (*e.g.*,
30 pleasure boats), the shipbuilding specific impact increases. The assessment of various shipbuilding materials
31 within the same study was limited to smaller vessels, typically pleasure boats or small ferries. As expected,
32 wooden boats generate the lowest GHG-emissions. They are usually followed by composite materials,
33 depending on the materials used in their production and the shipbuilding technique (hand lay-up or vacuum
34 infusion) adopted. Additional research is still needed to fully understand which manufacturing practice
35 performed better, although vacuum infusion appears to be the most promising. When compared to other
36 materials, aluminium performed the worst, making it the most burdensome material for shipbuilding. This is
37 primarily owing to the carbon footprint of raw aluminium, which requires a significant amount of energy for
38 extraction and purification. In this regard, the use of secondary aluminium would have significantly reduced
39 the vessel's environmental impact, as documented in another publication (Mio et al., 2021).
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

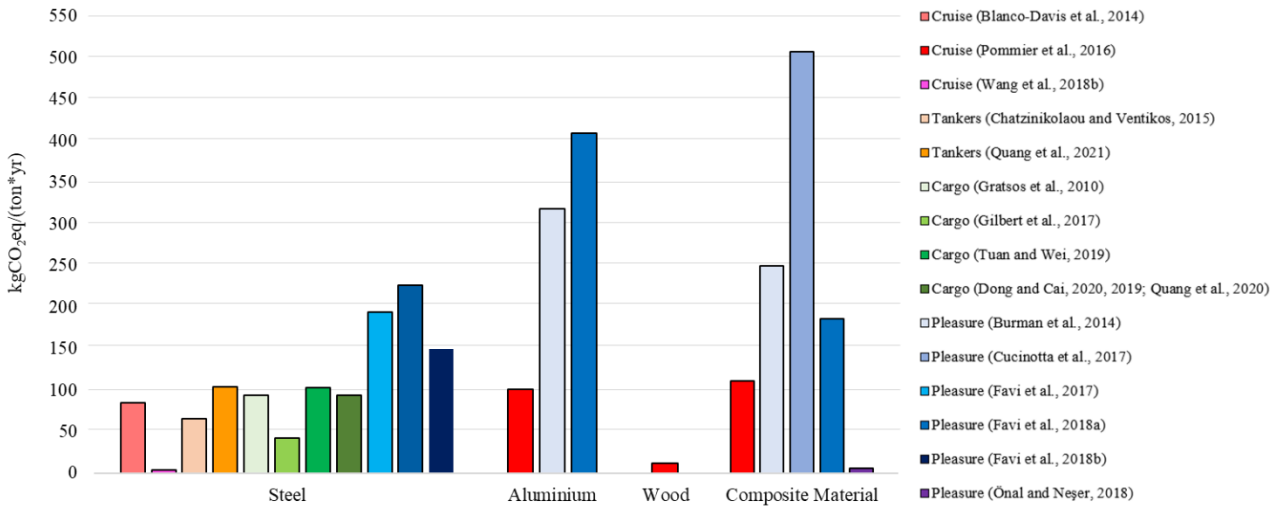


Figure 6: GHG-related normalized scores for several vessels' construction materials.

The benchmark values for the vertical normalization and the horizontal normalization of GHG-related impact categories are both presented in Table 9. Using vertical normalization, the operating phase impacts are not comparable across vessel classifications since they must be tailored to the purpose of each vessel. It is clear that a benchmark can be set for each vessel type when the user is considering the operational phase. For instance, a magnitude of 10^{-2} - $10^{-1} \frac{kgCO_2eq}{pass*km}$ is observed for cruise and ferry boats. On the other hand, a magnitude of 10^{-3} - $10^{-2} \frac{kgCO_2eq}{ton*km}$ is observed for tankers and cargo vessels, while a magnitude of 10^2 - $10^3 \frac{kgCO_2eq}{pass*hr}$ is observed for pleasure and sporting boats. These benchmark values can be adopted to investigate novel technologies and alternative fuels that allow reducing the environmental load of vessels based on their purpose.

Table 9: GHG-related emission ranges for the publications within each vessel category

Vessel type	CPC code	Operational phase GHG-related score (Vertical normalization)	Unit	Efficiency Ratio (Horizontal normalization)	Unit
Cruise and ferry boats	49311	$10^{-2} - 10^{-1}$	$\frac{kgCO_2eq}{pass * km}$	$10^{-3} - 10^{-2}$	$\frac{\% kgCO_2eq}{kW/ton}$
Tankers	49312	$10^{-3} - 10^{-2}$	$\frac{kgCO_2eq}{ton * km}$	$10^{-2} - 10^{-1}$	
Cargo vessels	49314	$10^{-3} - 10^{-2}$	$\frac{kgCO_2eq}{ton * km}$	10^{-1}	
Pleasure and sporting boats	494	$10^2 - 10^3$	$\frac{kgCO_2eq}{pass * hr}$	$10^{-4} - 10^{-2}$	

The index developed for the horizontal normalization (Efficiency Ratio), clearly rates the cargo vessels as the most efficient ships in terms of environmental load for the operational phase providing a benchmark of $10^{-1} \frac{\% kgCO_2eq}{kW/ton}$ which can serve as a reference to develop other type of vessels with significant improvements towards a higher environmental sustainability. The construction of recreational and sports boats demonstrates the necessity for greater care in their conception and design. In particular, the use of very powerful engines in comparison to the weight of the vessel leads to higher inefficiency during navigation, which, from a life cycle perspective, greatly increases the incidence of the operational phase.

To sum up, despite previous attempts, the scientific literature still lacks a normalization method for measuring the environmental performance of shipbuilding activities that covers all manufacturing and maintenance procedures aside from welding. In general, the environmental impacts related to raw materials used for hull and machinery constructions have been included within LCA studies, along with the related manufacturing processes (*i.e.*, cutting, bending, welding). This approach left the maintenance practices, which are quite relevant in shipyards activities, still affected by a higher degree of uncertainty. The maritime sector's vessel disposal processes are still fairly unknown or uncertain. The life cycle assessments utilizing a cradle-to-grave perspective lack homogeneity in allocation models, preventing a meaningful comparison of the outcomes.

This critical analysis contributes to the body of literature by collecting representative LCA publications in the naval industry for various vessel categories. This review identifies which naval vessels have been considered in previous LCA studies, reports the development and the assumptions of each work, collects the outcomes for GHG-related impacts, and offers some recommendations for future life cycle assessments in terms of functional unit selection, system boundaries, LCA approach, and results normalization and presentation.

5. References

- Abdou, K., Gascuel, D., Aubin, J., Romdhane, M.S., Ben Rais Lasram, F., Le Loc'h, F., 2018. Environmental life cycle assessment of seafood production: A case study of trawler catches in Tunisia. *Sci. Total Environ.* 610–611, 298–307. <https://doi.org/10.1016/j.scitotenv.2017.08.067>
- Abdou, K., Le Loc'h, F., Gascuel, D., Romdhane, M.S., Aubin, J., Ben Rais Lasram, F., 2020. Combining ecosystem indicators and life cycle assessment for environmental assessment of demersal trawling in Tunisia. *Int. J. Life Cycle Assess.* 25, 105–119. <https://doi.org/10.1007/s11367-019-01651-5>
- Andersson, K., Winnes, H., 2011. Environmental trade-offs in nitrogen oxide removal from ship engine exhausts. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 225, 33–42. <https://doi.org/10.1243/14750902JEME223>
- Barbera, E., Mio, A., Pavan, A.M., Bertucco, A., Fermeglia, M., 2022. Fuelling power plants by natural gas: An analysis of energy efficiency, economical aspects and environmental footprint based on detailed process simulation of the whole carbon capture and storage system. *Energy Convers. Manag.* 252. <https://doi.org/10.1016/j.enconman.2021.115072>
- Bicer, Y., Dincer, I., 2018a. Environmental impact categories of hydrogen and ammonia driven transoceanic maritime vehicles: A comparative evaluation. *Int. J. Hydrogen Energy* 43, 4583–4596. <https://doi.org/10.1016/j.ijhydene.2017.07.110>
- Bicer, Y., Dincer, I., 2018b. Clean fuel options with hydrogen for sea transportation: A life cycle approach. *Int. J. Hydrogen Energy* 43, 1179–1193. <https://doi.org/10.1016/j.ijhydene.2017.10.157>
- Blanco-Davis, E., del Castillo, F., Zhou, P., 2014. Fouling release coating application as an environmentally efficient retrofit: a case study of a ferry-type ship. *Int. J. Life Cycle Assess.* 19, 1705–1715. <https://doi.org/10.1007/s11367-014-0780-8>
- Burman, M., Kuttenukeuler, J., Stenius, I., Garme, K., Rosén, A., 2014. Comparative Life Cycle Assessment of the hull of a high-speed craft. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 230, 378–387. <https://doi.org/10.1177/1475090215580050>
- Chatzinikolaou, S.D., Ventikos, N.P., 2015. Holistic framework for studying ship air emissions in a life cycle perspective. *Ocean Eng.* 110, 113–122. <https://doi.org/10.1016/j.oceaneng.2015.05.042>
- Choi, J.K., Kelley, D., Murphy, S., Thangamani, D., 2016. Economic and environmental perspectives of end-of-life ship management. *Resour. Conserv. Recycl.* 107, 82–91. <https://doi.org/10.1016/j.resconrec.2015.12.007>

- 1 Cucinotta, F., Guglielmino, E., Sfravara, F., 2017. Life cycle assessment in yacht industry: A case study of
2 comparison between hand lay-up and vacuum infusion. *J. Clean. Prod.* 142, 3822–3833.
3 <https://doi.org/10.1016/j.jclepro.2016.10.080>
- 4 Cucinotta, F., Raffaele, M., Salmeri, F., Sfravara, F., 2021. A comparative Life Cycle Assessment of two sister
5 cruise ferries with Diesel and Liquefied Natural Gas machinery systems. *Appl. Ocean Res.* 112, 102705.
6 <https://doi.org/10.1016/j.apor.2021.102705>
- 7
8 Department of Economic and Social Affairs, U.N., 2015. Central Product Classification (CPC) Version 2.1.
9 New York.
- 10
11 Dong, D.T., Cai, W., 2020. Life-cycle assessment of ships: The effects of fuel consumption reduction and
12 light displacement tonnage. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 234, 143–153.
13 <https://doi.org/10.1177/1475090219858810>
- 14
15 Dong, D.T., Cai, W., 2019. A comparative study of life cycle assessment of a Panamax bulk carrier in
16 consideration of lightship weight. *Ocean Eng.* 172, 583–598.
17 <https://doi.org/10.1016/j.oceaneng.2018.12.015>
- 18
19
20 Dvarioniene, J., Zobelaitė-Noreikiene, G., Kruopiene, J., Stasiškiene, Ž., 2013. Application of the life-cycle
21 assessment method for pollution prevention in Klaipėda Sea Port, Lithuania. *J. Coast. Res.* 29, 1083–
22 1091. <https://doi.org/10.2112/JCOASTRES-D-11-00167.1>
- 23
24 Favi, C., Campi, F., Germani, M., Mandolini, M., 2019a. A data framework for environmental assessment of
25 metal arc welding processes and welded structures during the design phase. *Int. J. Adv. Manuf.*
26 *Technol.* 105, 967–993. <https://doi.org/10.1007/s00170-019-04278-w>
- 27
28 Favi, C., Campi, F., Germani, M., Manieri, S., 2018a. Using design information to create a data framework
29 and tool for life cycle analysis of complex maritime vessels. *J. Clean. Prod.* 192, 887–905.
30 <https://doi.org/10.1016/j.jclepro.2018.04.263>
- 31
32 Favi, C., Campi, F., Mandolini, M., Germani, M., 2019b. Using engineering documentation to create a data
33 framework for life cycle inventory of welded structures, in: *Procedia CIRP*. Elsevier B.V., pp. 358–363.
34 <https://doi.org/10.1016/j.procir.2019.01.006>
- 35
36 Favi, C., Germani, M., Campi, F., Mandolini, M., Manieri, S., Marconi, M., Vita, A., 2018b. Life Cycle Model
37 and Metrics in Shipbuilding: How to Use them in the Preliminary Design Phases. *Procedia CIRP* 69,
38 523–528. <https://doi.org/10.1016/j.procir.2017.11.071>
- 39
40 Favi, C., Raffaelli, R., Germani, M., Gregori, F., Manieri, S., Vita, A., 2017. A Life Cycle Model to assess costs
41 and environmental impacts of different maritime vessel typologies. *Proc. ASME 2017 Int. Des. Eng.*
42 *Tech. Conf. Comput. Inf. Eng. Conf.* 1–12.
- 43
44
45 Gilbert, P., Wilson, P., Walsh, C., Hodgson, P., 2017. The role of material efficiency to reduce CO2 emissions
46 during ship manufacture: A life cycle approach. *Mar. Policy* 75, 227–237.
47 <https://doi.org/10.1016/j.marpol.2016.04.003>
- 48
49 González-García, S., Villanueva-Rey, P., Belo, S., Vázquez-Rowe, I., Moreira, M.T., Feijoo, G., Arroja, L., 2015.
50 Cross-vessel eco-efficiency analysis. A case study for purse seining fishing from North Portugal
51 targeting European pilchard. *Int. J. Life Cycle Assess.* 20, 1019–1032. [https://doi.org/10.1007/s11367-](https://doi.org/10.1007/s11367-015-0887-6)
52 [015-0887-6](https://doi.org/10.1007/s11367-015-0887-6)
- 53
54
55 Gratsos, G.A., Psaraftis, H.N., Zachariadis, P., 2010. Life-cycle co2 emissions of bulk carriers: A comparative
56 study. *Trans. R. Inst. Nav. Archit. Part A Int. J. Marit. Eng.* 152.
57 <https://doi.org/10.3940/rins.ijme.2010.a3.176>
- 58
59 Gratsos, G.A., Zachariadis, P., 2005. Life cycle cost of maintaining the effectiveness of a ship's structure and
60 environmental impact of ship design parameters, in: RINA, Royal Institution of Naval Architects
61
62
63
64
65

International Conference - Design and Operation of Bulk Carriers. pp. 95–122.

- 1
2 Jang, H., Jeong, B., Zhou, P., Ha, S., Nam, D., Kim, J., Lee, J. ung, 2020. Development of Parametric Trend Life
3 Cycle Assessment for marine SOx reduction scrubber systems. *J. Clean. Prod.* 272, 122821.
4 <https://doi.org/10.1016/j.jclepro.2020.122821>
5
- 6 Jeong, B., Wang, H., Oguz, E., Zhou, P., 2018. An effective framework for life cycle and cost assessment for
7 marine vessels aiming to select optimal propulsion systems. *J. Clean. Prod.* 187, 111–130.
8 <https://doi.org/10.1016/j.jclepro.2018.03.184>
9
- 10 Kjær, L.L., Pagoropoulos, A., Hauschild, M., Birkved, M., Schmidt, J.H., McAloone, T.C., 2015. From LCC to
11 LCA using a hybrid Input Output model - A maritime case study, in: *Procedia CIRP*. Elsevier, pp. 474–
12 479. <https://doi.org/10.1016/j.procir.2015.02.004>
13
- 14 Ko, N., Gantner, J., 2016. Local added value and environmental impacts of ship scrapping in the context of a
15 ship's life cycle. *Ocean Eng.* 122, 317–321. <https://doi.org/10.1016/j.oceaneng.2016.05.026>
16
- 17 Ling-Chin, J., Roskilly, A.P., 2016a. Investigating a conventional and retrofit power plant on-board a Roll-
18 on/Roll-off cargo ship from a sustainability perspective - A life cycle assessment case study. *Energy*
19 *Convers. Manag.* 117, 305–318. <https://doi.org/10.1016/j.enconman.2016.03.032>
20
- 21 Ling-Chin, J., Roskilly, A.P., 2016b. Investigating the implications of a new-build hybrid power system for
22 Roll-on/Roll-off cargo ships from a sustainability perspective – A life cycle assessment case study.
23 *Appl. Energy* 181, 416–434. <https://doi.org/10.1016/j.apenergy.2016.08.065>
24
- 25 Ling-Chin, J., Roskilly, A.P., 2016c. A comparative life cycle assessment of marine power systems. *Energy*
26 *Convers. Manag.* 127, 477–493. <https://doi.org/10.1016/j.enconman.2016.09.012>
27
- 28 Mio, A., Bertagna, S., Cozzarini, L., Laurini, E., Bucci, V., Marinò, A., Fermeglia, M., 2021. Multiscale
29 modelling techniques in life cycle assessment: Application to nanostructured polymer systems in the
30 maritime industry. *Sustain. Mater. Technol.* 29, e00327.
31 <https://doi.org/10.1016/J.SUSMAT.2021.E00327>
32
- 33 Nian, V., Yuan, J., 2017. A method for analysis of maritime transportation systems in the life cycle approach
34 – The oil tanker example. *Appl. Energy* 206, 1579–1589.
35 <https://doi.org/10.1016/j.apenergy.2017.09.105>
36
- 37 Önal, M., Neşer, G., 2018. End-of-life alternatives of glass reinforced polyester boat hulls compared by LCA.
38 *Adv. Compos. Lett.* 27, 134–141. <https://doi.org/10.1177/096369351802700402>
39
- 40 Önal, M., Neşer, G., Gürsel, K.T., 2020. Environmental impacts of steel ship hulls building and recycling by
41 life cycle assessment (LCA). *Ships Offshore Struct.* <https://doi.org/10.1080/17445302.2020.1816706>
42
- 43 Park, T., So, S., Jeong, B., Zhou, P., Lee, J. ung, 2020. Life cycle assessment for enhanced Re-liquefaction
44 systems applied to LNG carriers; effectiveness of partial Re-liquefaction system. *J. Clean. Prod.*
45 <https://doi.org/10.1016/j.jclepro.2020.124832>
46
- 47 Pommier, R., Grimaud, G., Prinçaud, M., Perry, N., Sonnemann, G., 2016. Comparative environmental life
48 cycle assessment of materials in wooden boat ecodesign. *Int. J. Life Cycle Assess.* 21, 265–275.
49 <https://doi.org/10.1007/s11367-015-1009-1>
50
- 51 Quang, P.K., Dong, D.T., Hai, P.T.T., 2021. Evaluating environmental impacts of an oil tanker using life cycle
52 assessment method. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 235, 705–717.
53 <https://doi.org/10.1177/1475090221989195>
54
- 55 Quang, P.K., Dong, D.T., Van, T.V., Hai, P.T.T., 2020. Greenhouse gas emissions of a cargo ship from a life
56 cycle perspective. *Int. J. Environ. Sci. Dev.* 11, 347–351.
57 <https://doi.org/10.18178/IJESD.2020.11.7.1274>
58
59
60
61
62
63
64
65

- 1 Rahman, S.M.M., Handler, R.M., Mayer, A.L., 2016. Life cycle assessment of steel in the ship recycling
2 industry in Bangladesh. *J. Clean. Prod.* 135, 963–971. <https://doi.org/10.1016/j.jclepro.2016.07.014>
- 3 Ramos, S., Vázquez-Rowe, I., Artetxe, I., Moreira, M.T., Feijoo, G., Zufía, J., 2011. Environmental assessment
4 of the Atlantic mackerel (*Scomber scombrus*) season in the Basque Country. Increasing the timeline
5 delimitation in fishery LCA studies. *Int. J. Life Cycle Assess.* 16, 599–610.
6 <https://doi.org/10.1007/s11367-011-0304-8>
7
- 8 Sujaudhin, M., Koide, R., Komatsu, T., Hossain, M.M., Tokoro, C., Murakami, S., 2015. Characterization of
9 ship breaking industry in Bangladesh. *J. Mater. Cycles Waste Manag.* 17, 72–83.
10 <https://doi.org/10.1007/s10163-013-0224-8>
11
- 12 Tchertchian, N., Millet, D., Yvars, P.A., 2016. The influence of the level of definition of functional
13 specifications on the environmental performances of a complex system. *EcoCSP approach. Int. J.*
14 *Sustain. Eng.* 9, 277–290. <https://doi.org/10.1080/19397038.2015.1085110>
15
- 16 Tchertchian, N., Yvars, P.A., Millet, D., 2013. Benefits and limits of a Constraint Satisfaction Problem/Life
17 Cycle Assessment approach for the ecodesign of complex systems: A case applied to a hybrid
18 passenger ferry. *J. Clean. Prod.* 42, 1–18. <https://doi.org/10.1016/j.jclepro.2012.10.048>
19
20
- 21 The International Standards Organisation, 2021. ISO 14044 Environmental management - Life cycle
22 assessment - Requirements and guidelines.
23
- 24 Tuan, D.D., Wei, C., 2019. Cradle-to-gate life cycle assessment of ships: A case study of Panamax bulk
25 carrier. *Proc. Inst. Mech. Eng. Part M J. Eng. Marit. Environ.* 233, 670–683.
26 <https://doi.org/10.1177/1475090218813731>
27
- 28 Villeneuve, J., 2007. <http://forwast.brgm.fr/>.
29
- 30 Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018a. Optimisation of operational modes of short-route hybrid
31 ferry: A life cycle assessment case study. *Marit. Transp. Harvest. Sea Resour.* 2, 961–970.
32
- 33 Wang, H., Oguz, E., Jeong, B., Zhou, P., 2018b. Life cycle cost and environmental impact analysis of ship hull
34 maintenance strategies for a short route hybrid ferry. *Ocean Eng.* 161, 20–28.
35 <https://doi.org/10.1016/j.oceaneng.2018.04.084>
36
- 37 Wang, H., Zhou, P., 2018. Systematic evaluation approach for carbon reduction method assessment – A life
38 cycle assessment case study on carbon solidification method. *Ocean Eng.* 165, 480–487.
39 <https://doi.org/10.1016/j.oceaneng.2018.07.050>
40
- 41 Wang, H., Zhou, P., Liang, Y., Jeong, B., Mesbahi, A., 2020. Optimization of tugboat propulsion system
42 configurations: A holistic life cycle assessment case study. *J. Clean. Prod.* 259, 120903.
43 <https://doi.org/10.1016/j.jclepro.2020.120903>
44
- 45 Ziegler, F., Groen, E.A., Hornborg, S., Bokkers, E.A.M., Karlsen, K.M., de Boer, I.J.M., 2018. Assessing broad
46 life cycle impacts of daily onboard decision-making, annual strategic planning, and fisheries
47 management in a northeast Atlantic trawl fishery. *Int. J. Life Cycle Assess.* 23, 1357–1367.
48 <https://doi.org/10.1007/s11367-015-0898-3>
49
50
- 51 Zuin, S., Belac, E., Marzi, B., 2009. Life cycle assessment of ship-generated waste management of Luka
52 Koper. *Waste Manag.* 29, 3036–3046. <https://doi.org/10.1016/j.wasman.2009.06.025>
53
54
55
56
57
58
59
60
61
62
63
64
65



Click here to access/download
Supplementary File
Supplementary material.docx



Declaration of interests

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

The authors declare the following financial interests/personal relationships which may be considered as potential competing interests: